
SIMPL'HOME

Warm Shaker / Norfolk / Lexington

54W Storage Cabinet with Wine Rack, Doors and Drawers

Model # AXCWSH71-XXX

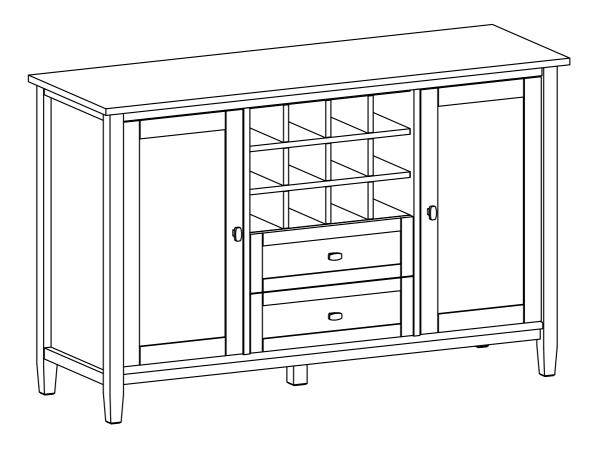

brooklyn + max Wynden + to Home Dec

SIMPL'HOME

Claim Your Free Gift

Your opinion pays: Earn a gift!

Review your purchase and receive a gift.* It could be a gift card, Simpli Rewards points, or another special reward.



CLAIM YOUR REWARD NOW!



simpli-home.com/get-free-gift



*Offer valid for reviews posted within 30-days of purchase.

SIMPL'HOME

For Fastest Customer Service:



- 1. Open your phone's camera.
- 2. Point your phone's camera at the QR code to scan.
- 3. Click on the pop up.
- 4. You'll be taken to our customer service page.
- 5. Fill the form with your order information and issue.
- 6. Submit form.
- 7. A customer service associate will contact you.

Other ways to contact us...



Email Us

customer service@simpli-home.com



Visit Us

Visit our site directly at www.simpli-home.com



Call Us

1-866-518-0120 Monday to Friday 9am to 5pm EST

*If you've purchased from a retailer and you wish to return the product, please contact the retailer directly.

IMPORTANT: Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

Safety Information

CAUTION: Injuries and damage can occur from furniture tip over if product is not properly anchored to the wall. Use the Furniture Anti-Tipping Restraint provided with the product. Consult our assembly instructions for help.

If the Furniture Anti-Tipping Restraint kit is not in the box, please contact our customer service department in order to obtain another kit before using the furniture.

Identify all the parts and hardware. Do not discard of the packaging until you have checked that you have all of the parts and hardware required. Hardware package may have spare parts.

WARNING: This item contains small parts which can be swallowed by children and pets. Keep children and pets away during assembly. To avoid danger of suffocation, always keep plastic bags away from children and pets. We recommend that you assemble this unit on a carpeted floor to avoid scratches. If using power tools, set the tool to low torque to avoid damage.

May require 2 people for ease of assembly.

Care & Maintenance

This furniture is designed for indoor use.

Perhaps the greatest environmental damage to wood furniture comes from wide swings in relative humidity (RH) in our homes. Wood absorbs and desorbs water as relative humidity rises and falls, and in doing so it swells and shrinks. Making matters worse, it expands and contracts unequally along different grain directions. As humidity changes, the components of wooden objects are continually pushing and pulling against each other. This pressure often results in parts of furniture no longer fitting together closely or becoming distorted or breaking from their own internal stresses.

The response to relative humidity changes begins with determining the annual average RH for your particular space. Then try to keep the RH in the space where your furniture is as close to that average as possible, generally within about 10% up or down. De-humidify in the summer and humidify in the winter.


Be aware that raising the temperature lowers the humidity and vice versa. Thus, modern heating systems, which can drive down interior RH in the winter, almost invariably cause problems for furniture. To counteract their effect, you can either modify the RH by keeping furniture containing spaces cooler in the winter or most importantly, have a good working humidifier for your home. A humidistat automatically works to balance the humidity in your home so it is constant. Dry indoor air can suck enough moisture from its surroundings to do permanent damage to wood, causing it to crack or split.


Remember, that not all woods are created equal. Two factors that help determine how rapidly a wood will lose moisture are pore size and surface hardness. A piece made from a dense and hard wood will dry less rapidly than pieces made from softer woods.

Furniture that is sealed and lacquered will lose moisture more slowly than an unfinished piece while pieces with veneer finishes are not only stronger but lose moisture more slowly than other finishes.

To help protect your wood furniture, take these steps:

- Use a humidifier, preferably one with an automatic control system that can sense the humidity level and adjust itself accordingly
- Don't over-humidify; that can damage wood by causing it to expand and contract
- Keep furniture out of direct sunlight, which can cause it to dry out, crack and warp
- If you can avoid it, don't put furniture near heating vents; if you can't, keep the item 3 to 4 inches away from the wall, giving the heat and air space to circulate
- Dust with soft dry cloth
- Do not use liquid or aerosol products
- To avoid marking, do not place rubber on surface (foot pads, etc.)
- For soil build-up, wipe with damp cloth & dry
- Do not use abrasive cleaners

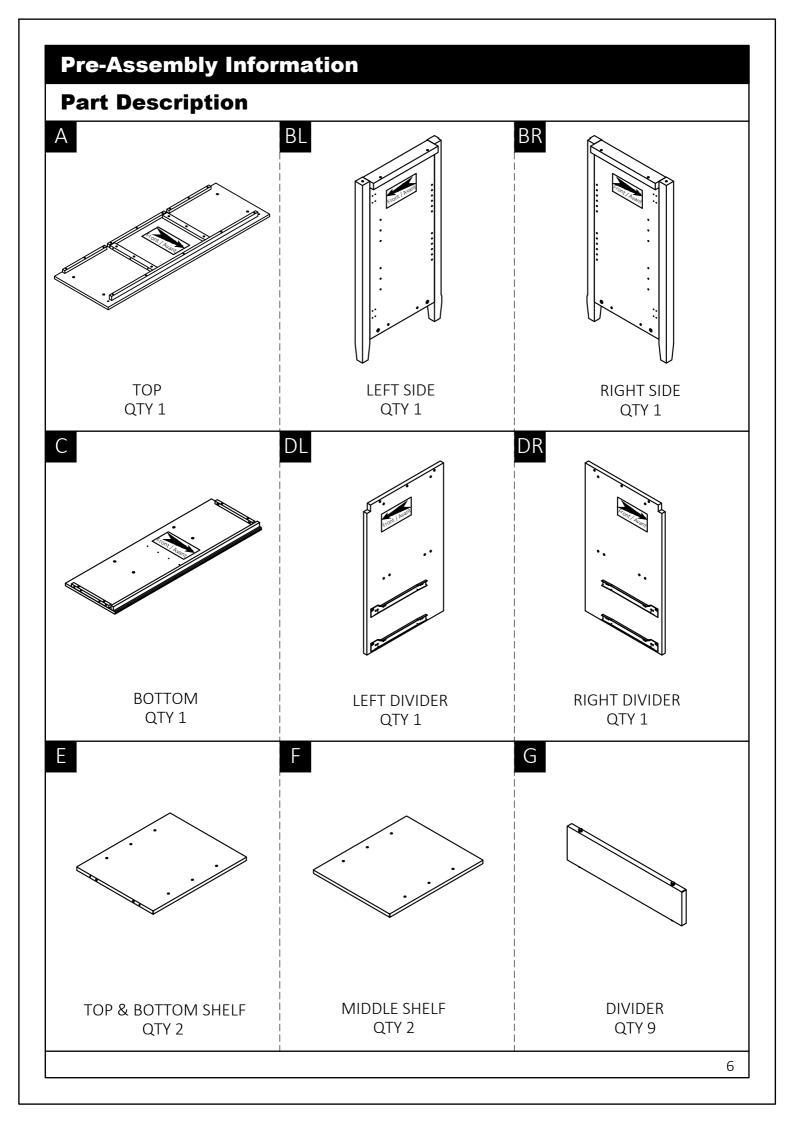

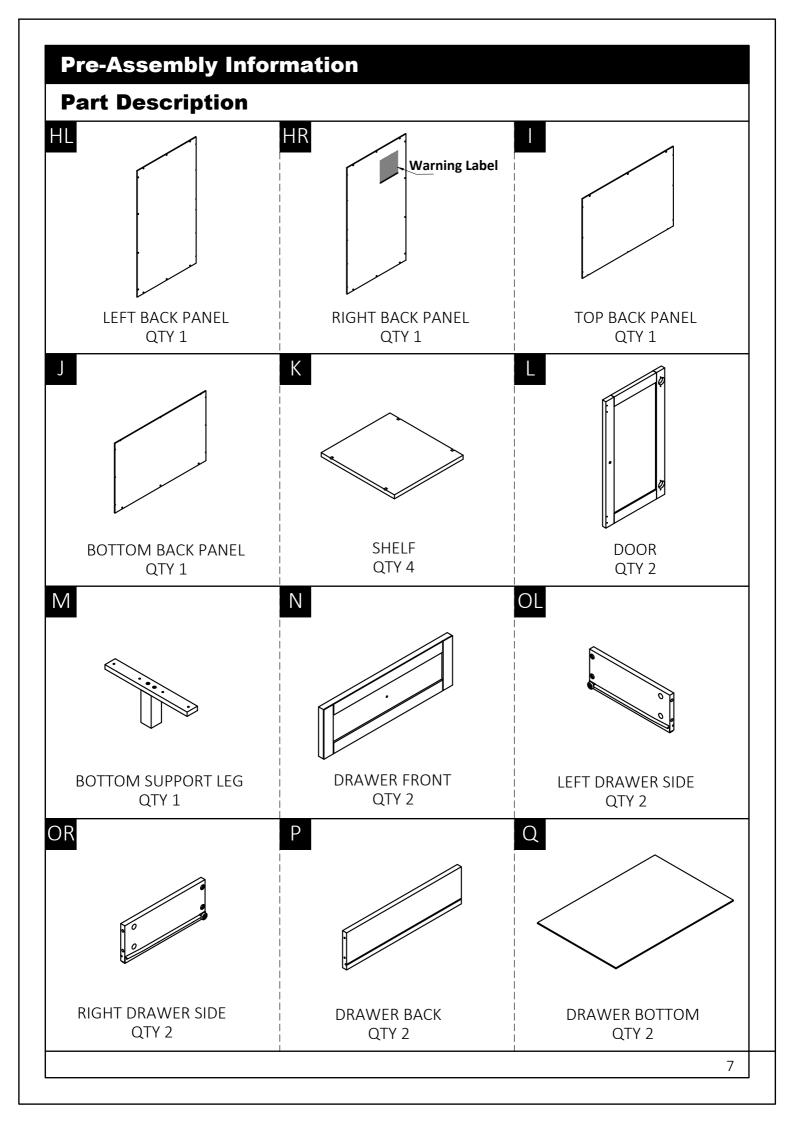

Pre-Assembly Information

Hardware Description





ALLEN KEY BOLT M6 X 30mm QTY8





CAM LOCK PIN **CAM LOCK** QTY 8 SETS





ALLEN KEY SCREW M6 X 30mm QTY 20



ALLEN KEY QTY 1

5




PHILLIPS SCREW **ROUND HEAD** M4 X 40mm QTY8






PLASTIC CROSS NUT Ø9 X 10mm QTY8





HANDLE M4 X 25 mm QTY 4 SETS






WOOD DOWEL Ø8 X 30mm **QTY 14**

9



PHILLIPS SCREW **ROUND HEAD** M4 X 15mm **QTY 41**





MAGNET AND PLATE QTY 2 SETS





PHILLIPS SCREW M3 X 15mm QTY8



ADJUSTABLE HINGE Ø35 QTY 4

13



PHILLIPS SCREW M4 X 15mm **QTY 24**

14



PHILLIPS SCREW M4 X 25mm QTY 4



M4 X 25mm - QTY 2 (1 is extra)






FURNITURE TIP OVER RESTRAINT QTY 1 SET

16



SHELF SUPPORT **QTY 24**





Required -Flathead screwdriver Phillips screwdriver Rubber mallet

Not Included




Components - Key Diagram

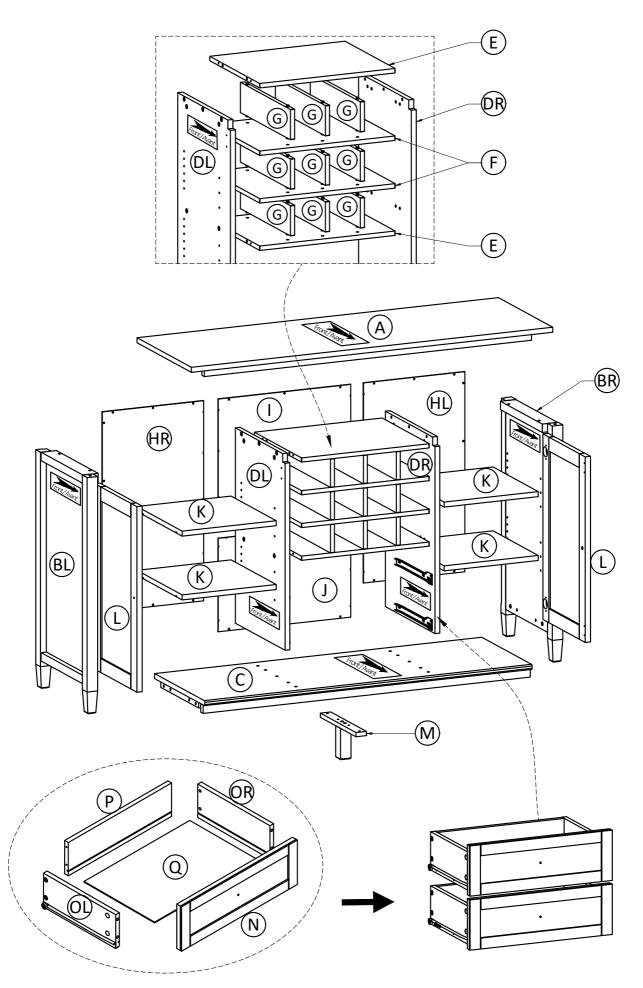


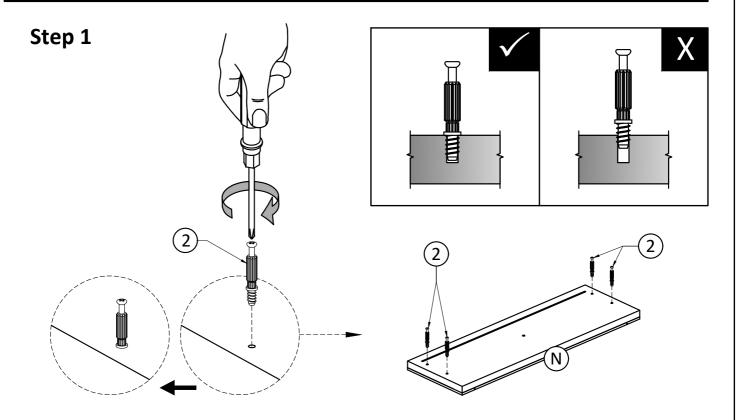


- 1. Attach four Cam Lock Pins ② into pre-drilled holes on back of Drawer Front N.
- 2. Use Phillips screwdriver to secure Cam Lock Pins. Do not over-tighten.

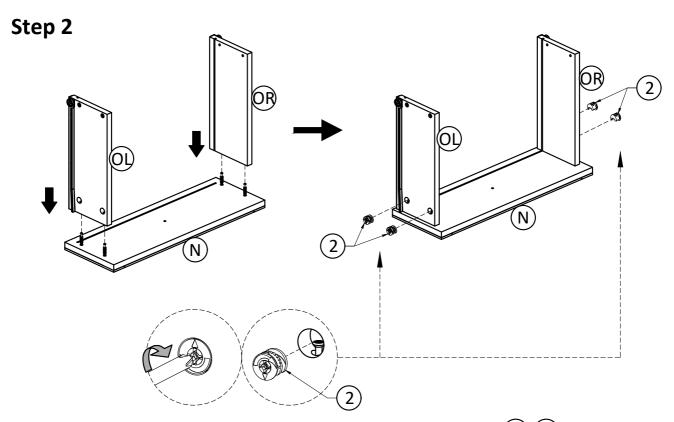

- 1. Align Cam Lock Pins with guide holes and attach Drawer Sides OL, OR.
- 2. Insert two Cam Locks ② into guided holes on each Drawer Side OL, OR).
- 3. Use Phillips screwdriver to secure Cam Locks. Do not over-tighten.

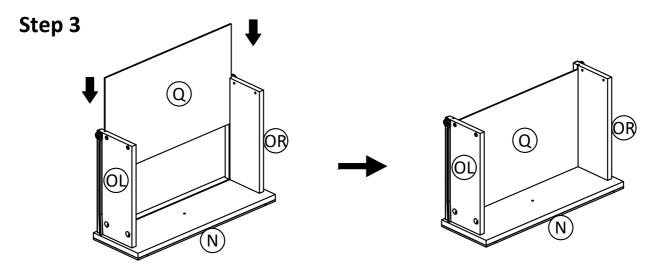


1. Slide Drawer Bottom (a) firmly into slots on Drawer Sides (D), (OR) and Drawer Front (N).

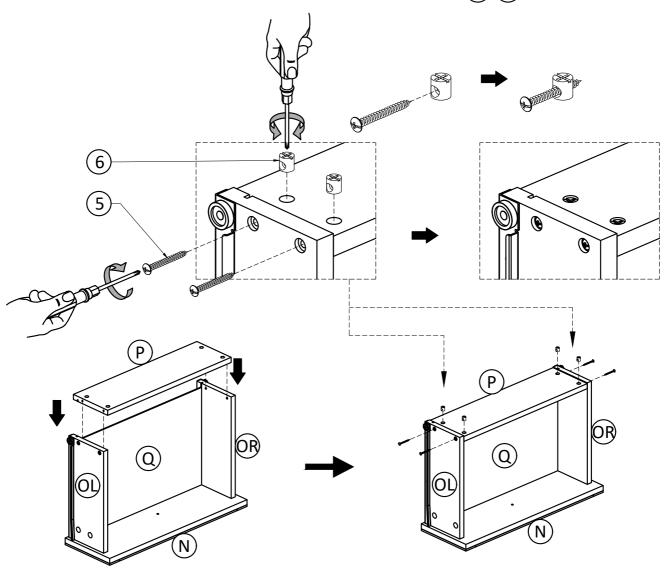


- 2. Align Drawer Back (P) with Drawer Bottom (Q) and press firmly into slot.
- 3. Attach Drawer Back using two Phillips Screw Round Head (5) and Plastic Cross Nuts (6) through guide holes on each Drawer Side (OL), (OR).
- 4. Use Phillips screwdriver to secure Screw. Do not over-tighten.

Step 4

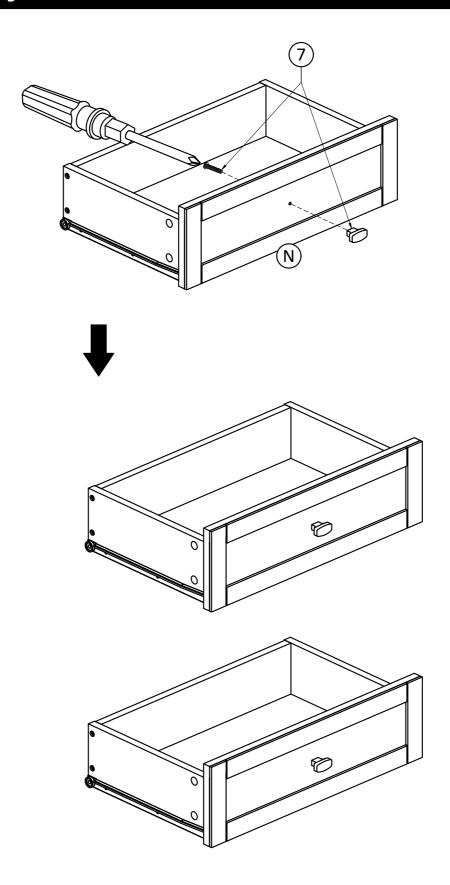


1. Use Phillips screwdriver to attach Handle \bigcirc to Drawer Front \bigcirc .


Repeat Step 1 - 4 for the second drawer.

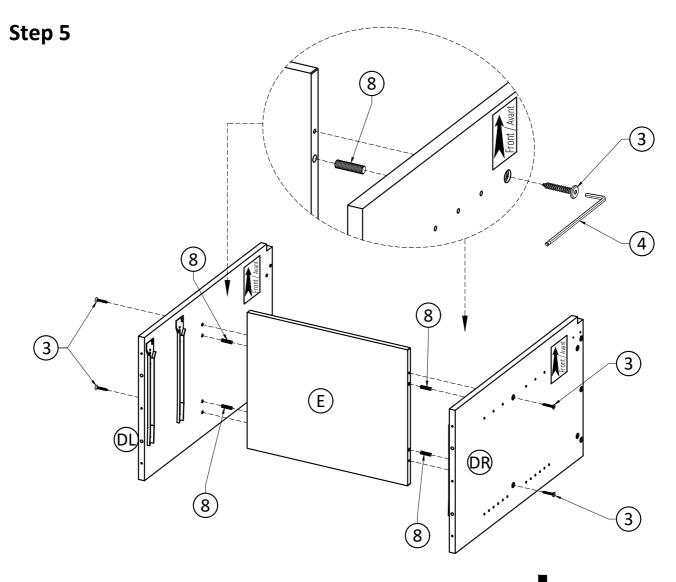


- 1. Insert Wood Dowels (8) into guide holes on Bottom Shelf (E).
- 2. Use rubber mallet to tap Wood Dowels (8) into bottom of holes securely. 1/3 length of Dowels should be exposed.
- 3. Align Wood Dowels on Bottom Shelf (E) with guided holes and attach Bottom Shelf (E) to Dividers (DL), (DR).
- 4. Use two Allen Key Screws ③ to attach each Divider DL, DR) through guide holes.
- 5. Use Allen Key 4 to tighten screws. Do not over-tighten.

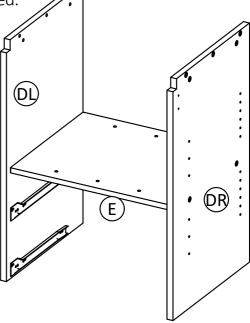




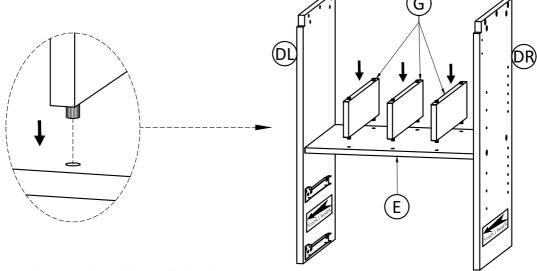


1. Align Wood Dowels with guide holes and attach three Dividers (G) to Bottom Shelf (E).

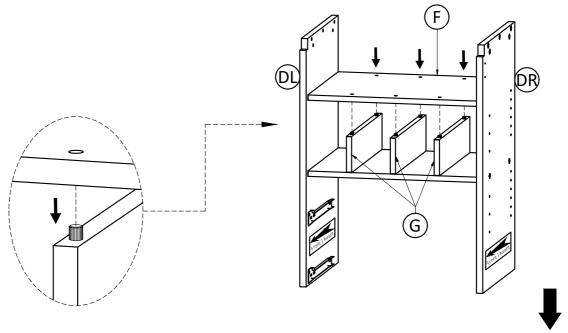


2. Align Wood Dowels with guide holes and attach Middle Shelf (F) to three Dividers (G).

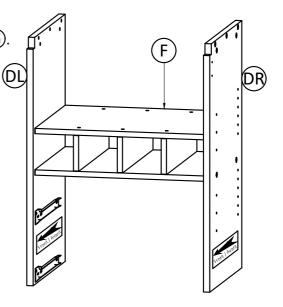


Step 7

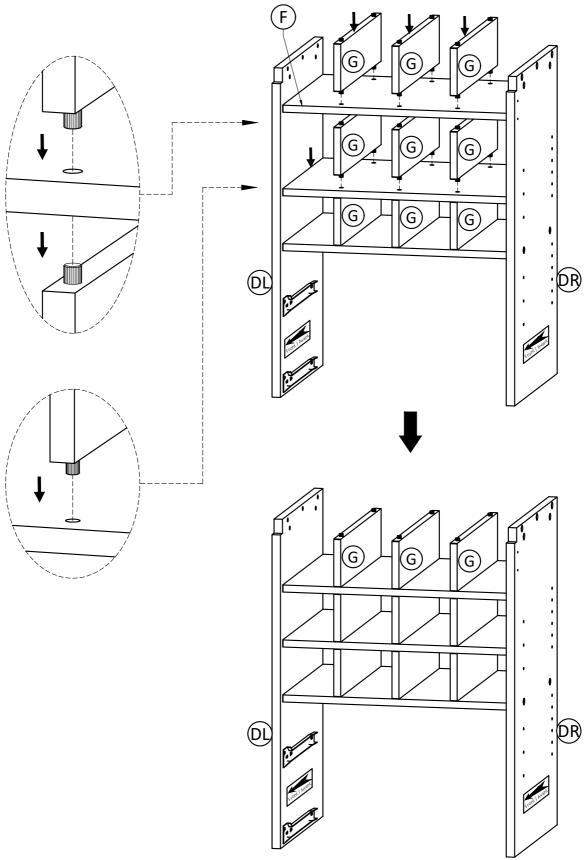


1. Repeat Step 6 for the other Dividers ⑤ and Middle Shelf ⑤.

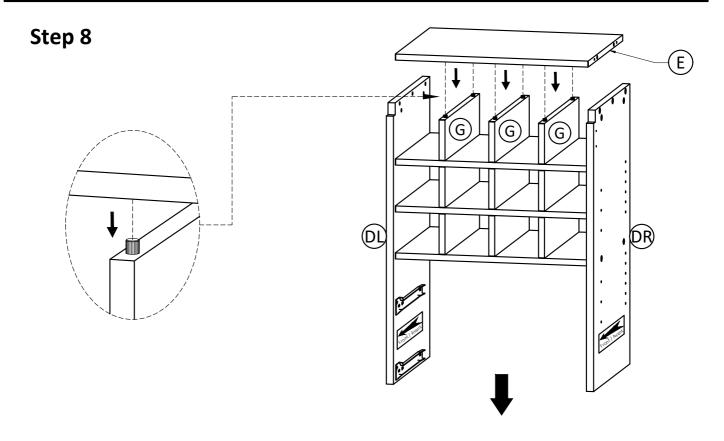

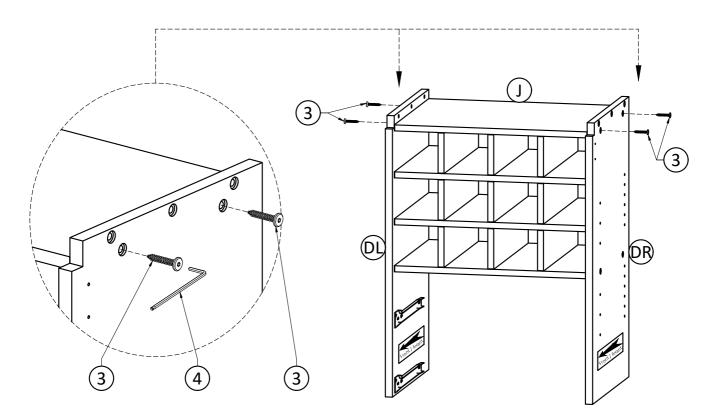


- Align Wood Dowels on Dividers (G) with guided holes on Top Shelf (E).
 Attach Top Shelf (E) to Dividers (D), (DR) using four Allen Key Screws (3) (Two Screws on each Divider).
- 3. Use Allen Key 4 to tighten screws. Do not over-tighten.

Step 9

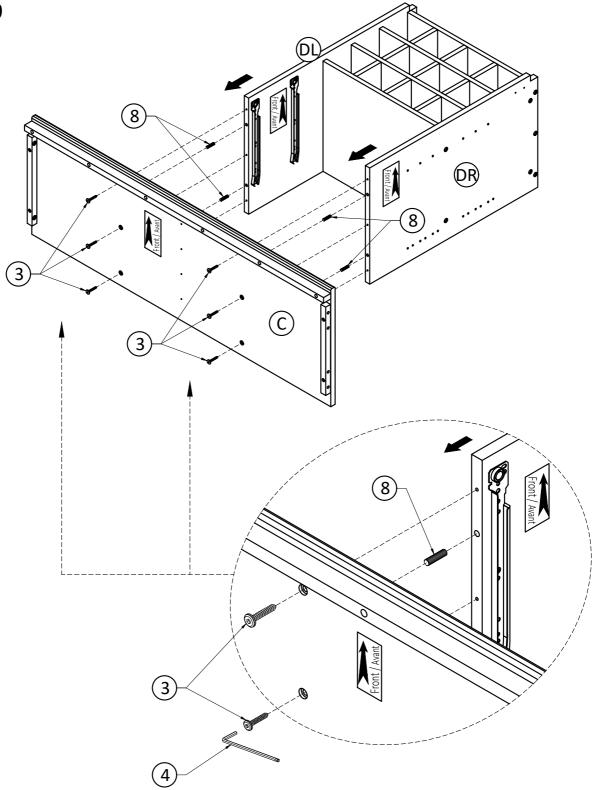


- 1. Insert two Wood Dowels (8) into guide holes on each Divider (DL), (DR).
- 2. Use rubber mallet to tap Wood Dowels (8) into bottom of holes securely. 1/3 length of Wood Dowels should be exposed.
- 3. Align Wood Dowels with guide holes and attach Dividers (DL), (DR) to Bottom (C).
- 4. Use six Allen Key Screws (3) to attach Bottom (C) through guide holes.
- 5. Use Allen Key 4 to tighten Screws. Do not over-tighten.

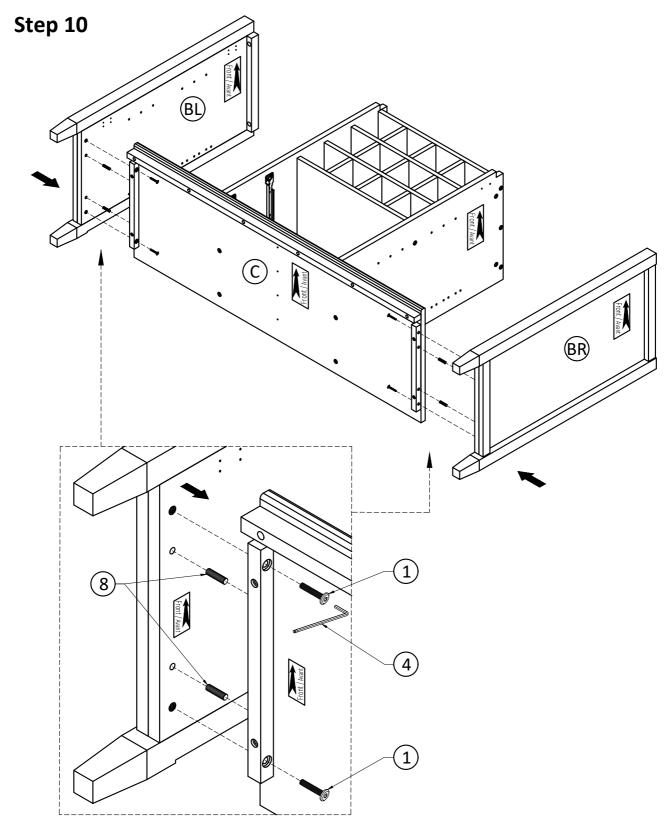


- 1. Insert four Wood Dowels (8) into guide holes on Bottom (C).
- 2. Use rubber mallet to tap Wood Dowels (8) into bottom of holes securely. 1/3 length of Wood Dowels should be exposed.
- 3. Align Wood Dowels with guide holes and attach Sides(BL), (BR) to Bottom (C).
- 4. Use four Allen Key Bolts 1 to attach Bottom C through guide holes.
- 5. Use Allen Key 4 to tighten Bolts. Do not over-tighten.

Step 11

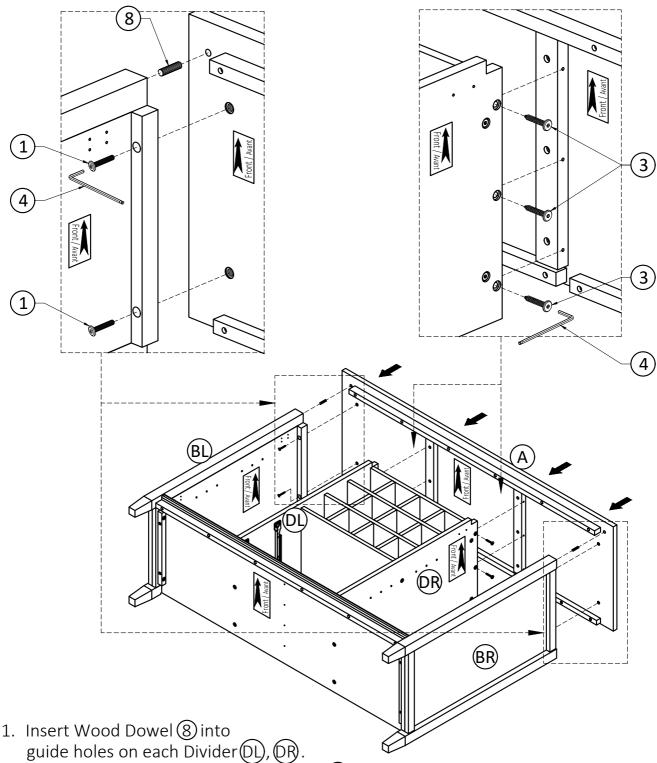

- 2. Use rubber mallet to tap Wood Dowels (8) into bottom of holes securely. 1/3 length of Wood Dowels should be exposed.
- 3. Align Wood Dowels with guide holes and attach Sides (BL), (CR) and Divides (DL), (DR) to Top (A).
- 4. Use two Allen Key Bolts 1 to attach each Side BL, BR through guide holes.
- 5. Use three Allen Key Screws (3) to attach each Divider (DL), (DR) through guide holes.
- 6. Use Allen Key 4 to tighten Bolts and Screws. Do not over-tighten.

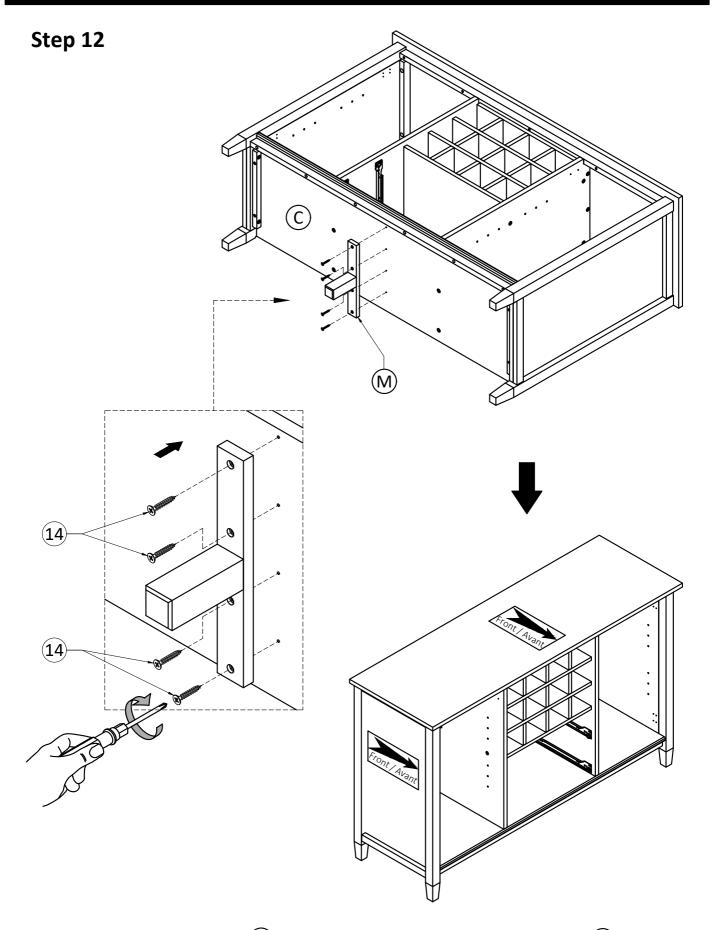


1. Align Bottom Support Leg (M) with pre-drilled holes on back of Bottom (C). Use Phillips Screwdriver to tighten four Phillips Screws (14).


Step 13

Note:


The back of the cabinet frame does not have pre-drilled holes to attach the back panels.

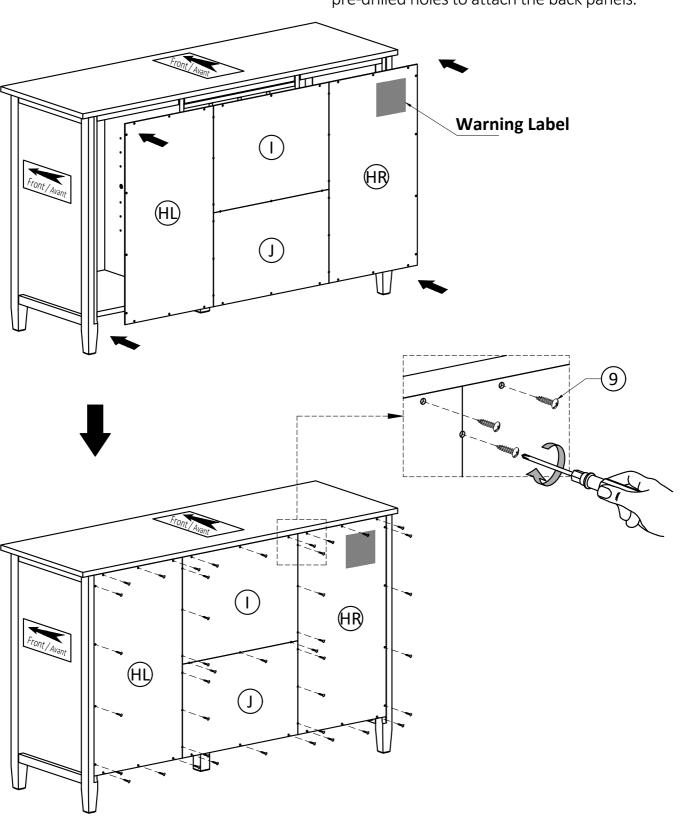

- 1. Attach the Back Panels(HL), (HR), (I), (J) to back frame using Phillips Screws Round Head (9) through guide holes from Back Panels.
- 2. Use Phillips Screwdriver to tighten screws. Do not over-tighten.

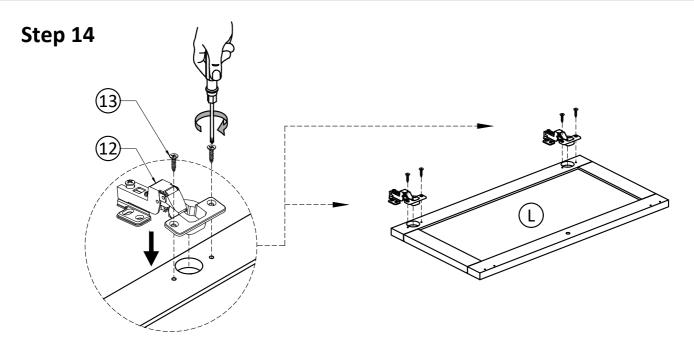


1. Attach Adjustable Hinges (12) to Doors (L) using Phillips Screws (13) into pre-drilled holes on Doors (L).

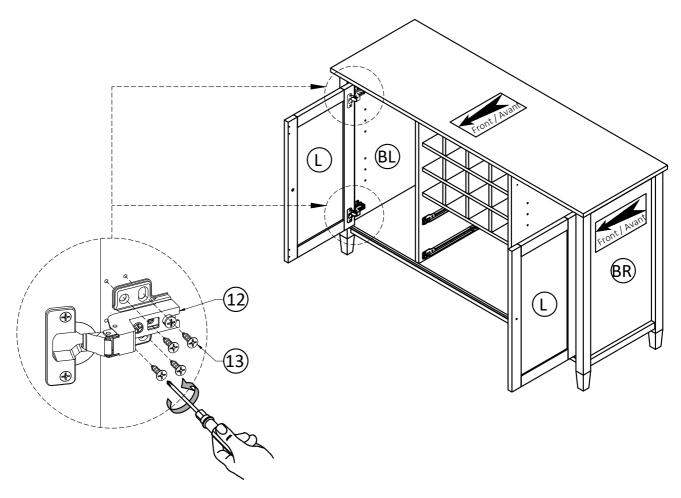

2. Attach Adjustable Hinges (12) on Doors (L) to Sides (BL) (BR) using Phillips Screws (13) into pre-drilled holes on Sides (BL) (BR)


3. Use Phillips screwdriver to snugly tighten screws. Do not over-tighten.

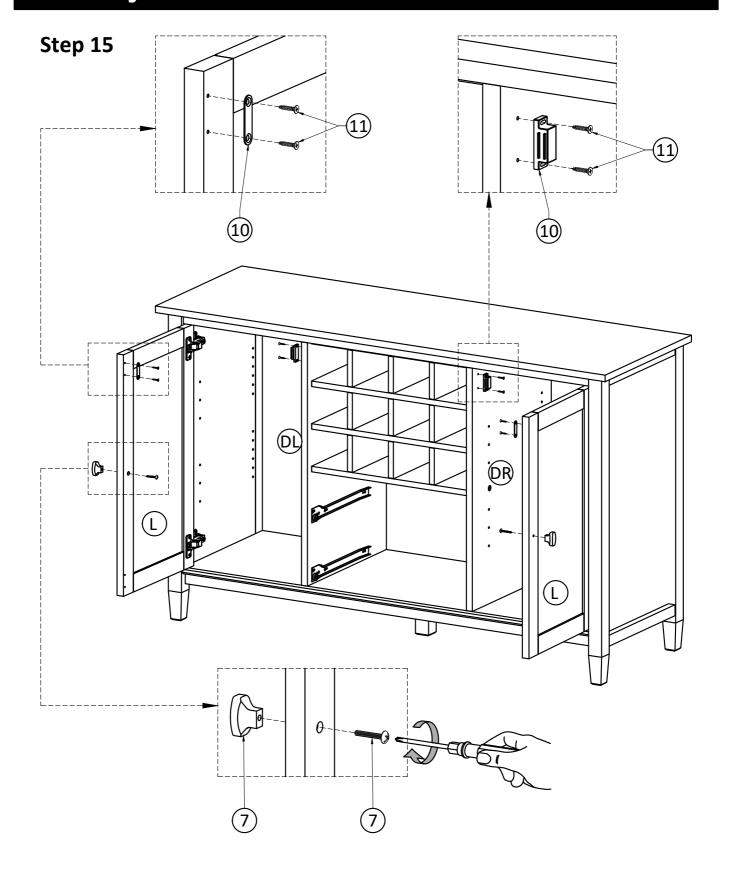

- 1. Attach Magnet Plates 10 to bottom corner of Doors Uusing Phillips Screws 11 into pre-drilled holes on Doors U.
- 2. Attach Magnets 10 using Phillips Screws 11 into pre-drilled holes on Dividers 01, 08.
- 3. Use Phillips screwdriver to snugly tighten screw. Do not over-tighten.
- 4. Use Phillips screwdriver to attach Handles 7 to Doors ().

Step 16

IMPORTANT NOTE:

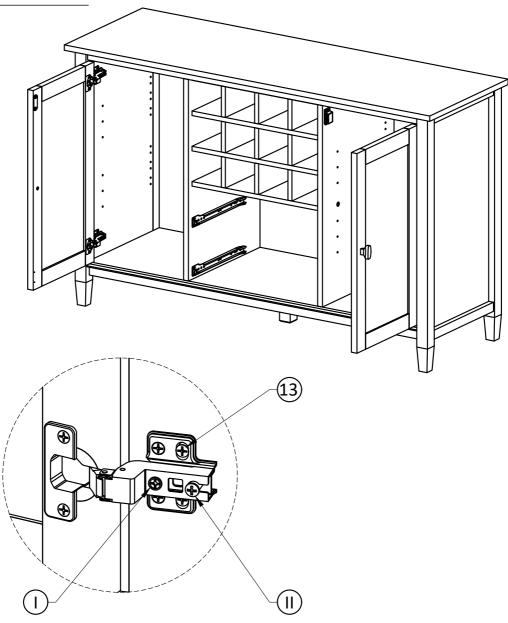


Tighten the Screw marked (I) to fasten hinge. The door may need to be adjusted so that all the spaces between the door and the unit sides are equal. To adjust, follow instructions:


- 1. Side adjustment 4 mm

 To move the door towards the side panel, loosen screw (I) and tighten screw (I).

 To move the door away from the side panel, loosen screw (II) and tighten screw (I).
- 2. Depth adjustment 4 mm Loosen screw(II)(just one turn), adjust door to desired position, re-tighten screw.
- 3. Height adjustment Loosen screw (13), adjust door to desired position, re-tighten screw.

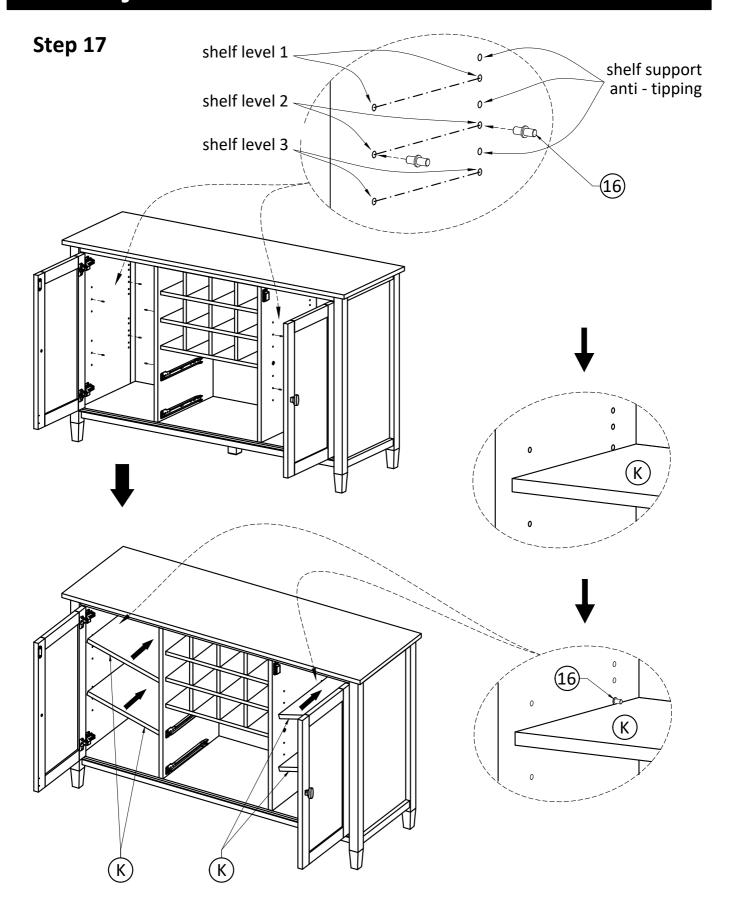

- 1. Use four Shelf Supports 16 for each Shelf K in desired location.
- 2. Two Shelf Supports 16 may be used on back top of each Shelf (K) as a tipping restraint.

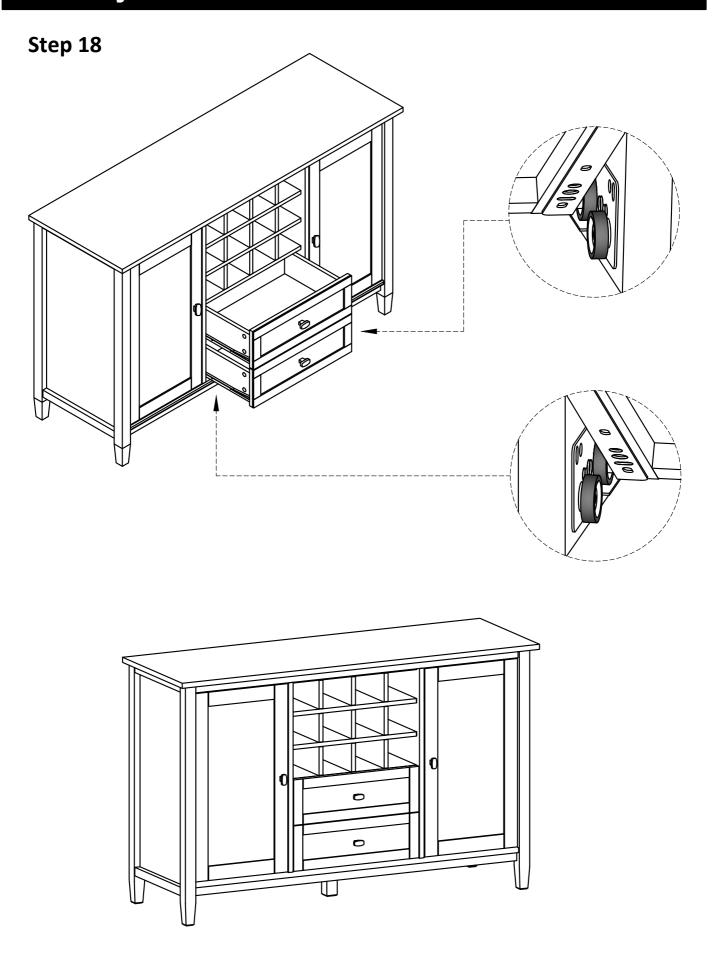


1. Insert assembled drawers into glides on assembled cabinet.

Furniture Tip Over Restraint Assembly




WARNING

Serious or fatal crushing injuries can occur from furniture tip-over. If the furniture tip over restraint kit is not in the box, please contact our customer service department in order to obtain another kit before using the furniture.

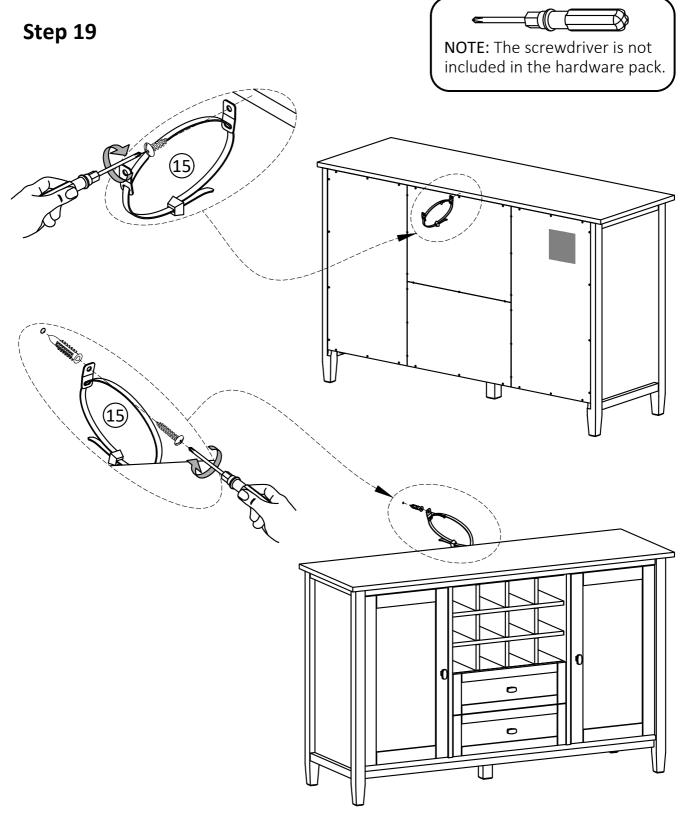


Furniture Anti-Tipping Restraint Instructions


1. Attach one of the mounting brackets securely to the back edge of the furniture. Use the shorter screw.



2. Determine where furniture is to be placed and mark location on the wall for mounting bracket screw hole approximately 2 inches below the bracket mounted to the furniture.



- 3. Drill a 3/16 inch hole in the wall. Press the plastic anchor into the hole and gently tap until the flange on the anchor is against the wall surface.
- 4. Position the bracket over the anchor and use the longer screw to securely attach the bracket to the wall.
- 5. Place the furniture so the back edge is in line with the bracket on the wall.
- 6. Lace an end of the nylon zip-tie strap down through each bracket. Bring both ends together and slide the smooth side upright through the square-shaped end and pull through to create the "locked" position.
- 7. Check to make sure the strap is securely laced and locked to the brackets.



- **DO NOT** put a TV or other heavy objects on top of furniture not intended for use with a TV
- **DO NOT** place heavy objects in top drawers or on top shelves
- **DO NOT** let children climb or hang on drawers, doors or shelves