
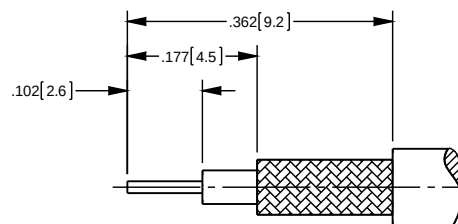




NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR USE WITH RG-178, 196, OR EQUIVALENT.
2. MATERIAL SPECIFICATIONS:
INSULATORS: PTFE, COLOR - NATURAL
CONTACT AND RETAINING RING: BERYLLIUM COPPER
FERRULE: COPPER
ALL OTHER METAL PARTS: BRASS
3. FINISH SPECIFICATIONS:
CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL
ALL OTHER METAL: THIN GOLD OVER .000050 MIN THICK COPPER
4. ELECTRICAL SPECIFICATIONS:
IMPEDANCE: 50 OHMS
5. INSULATOR, COVER, AND FERRULE SHIPPED LOOSE.
6. CRIMP FERRULE (.128 HEX) AND SOLDER TO CONTACT.

REV	DESCRIPTION	BY DATE	APPD
A	ER052856	JL 12/12/14	MS



RECOMMENDED CABLE STRIPPING DIM'S

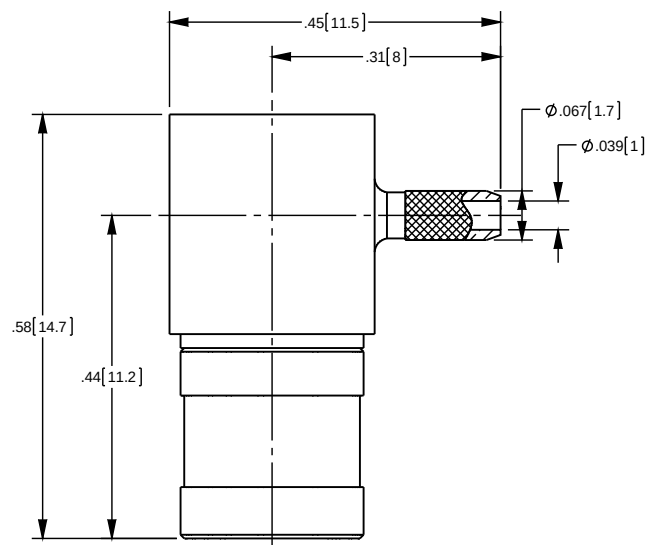

CATALOG P/N: 1013A204F

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: .XX [XX] ± .01 [0.3] XXX [XXX] ± .005 [0.13] XXXX [XXXX] ± .000X ANGLES: ± 2° SCALE: 5:1							
CUSTOMER SALES DRAWING				SMB R/A CRIMP PLUG FOR RG-178 CABLE			
DRAWN JL	DATE 12/12/2014	APPROVED SM	DATE 12/19/2014				
APPROVED MS	DATE 12/12/14	APPROVED XXX	DATE XX/XX/XX	A	SD1013A204F	SHT 1	OF 1
						REV A	