

Sensorflo® AC Powered Lavatory Faucet

MODELS:

- ❑ S-8800-CA-E: Single basin low profile faucet.
- ❑ S-8801-CA-E: Single basin low profile faucet, under counter mechanical mixer with built-in backflow check valves.
- ❑ S-8810-CA-E: Low profile faucet with 4 in. deck plate.
- ❑ S-8811-CA-E: Low profile faucet with 4 in. deck plate, under counter mechanical mixer with built-in backflow check valves.
- ❑ S-8820-CA-E: Low profile faucet with 8 in. deck plate.
- ❑ S-8821-CA-E: Low profile faucet with 8 in. deck plate, under counter mechanical mixer with built-in backflow check valves.

FEATURES:

- Solenoid with built-in filter.
- UL/CSA approved transformer 120 VAC to 12 VDC with waterproof connectors.
- Spout consists of all metal chassis and removable cover.
- Lead-free construction
- Vandal-resistant 60-second time out feature.
- Water conserving vandal-resistant flow control reduces flow to 0.5 gpm (1.89 L/min).
- NOTE: Stainless steel flexible supply hose(s), 3/8 in. compression, to supply stop(s) not included, see add-ons below.

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified
- NSF 61 certified
- NSF 372 certified

FINISH:



PC

ADD-ONS:

- 0.5 gpm Boca spray outlet & 1.5 gpm laminar flow outlet kit
- Two (2) stainless steel flexible supply hoses to supply stops
- One (1) stainless steel hose for tempered water systems (S-8800, S-8810, & S-8820 only)
- Under counter thermostatic mixing valve (S-8717, S-8727 only)
- Vandal-resistant screws for removable cover and custom wrench
- 1.2 gpm laminar flow outlet
- 1.2 gpm aerator
- Tee with integral check valves

- ❑ A-BOLF
- ❑ A-HS
- ❑ A-HTS
- ❑ A-TMV
- ❑ A-VRS
- ❑ A-ELF
- ❑ A-EA12
- ❑ A-TEE

OPTION: Add suffix to model

- Less transformer

- ❑ -LT

WARRANTY:

- 5 Year Limited

S-8800-CA-E
S-8801-CA-E





S-8810-CA-E
S-8811-CA-E



S-8820-CA-E
S-8821-CA-E




DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.
2. Inlet is 3/8" compression with male threads. Position faucet as close to the edge of the sink as possible.

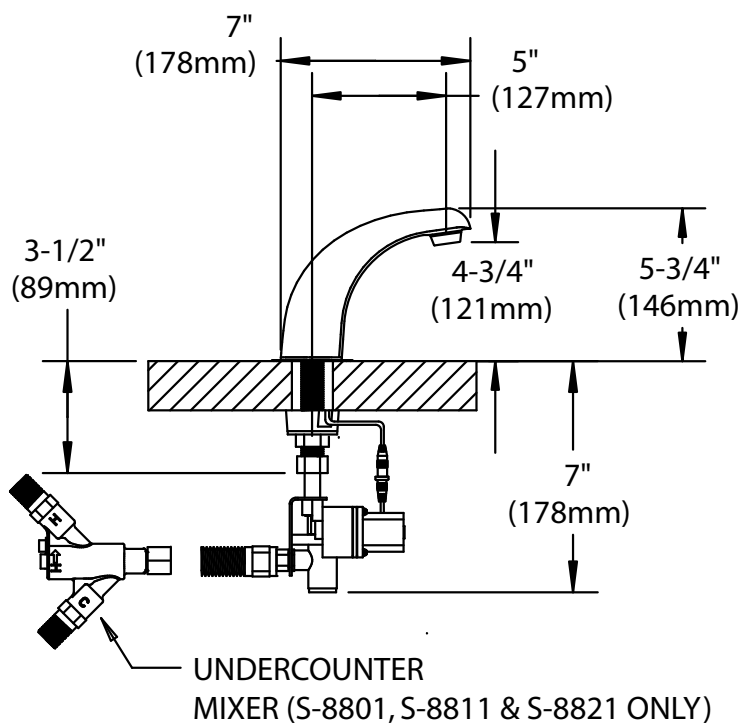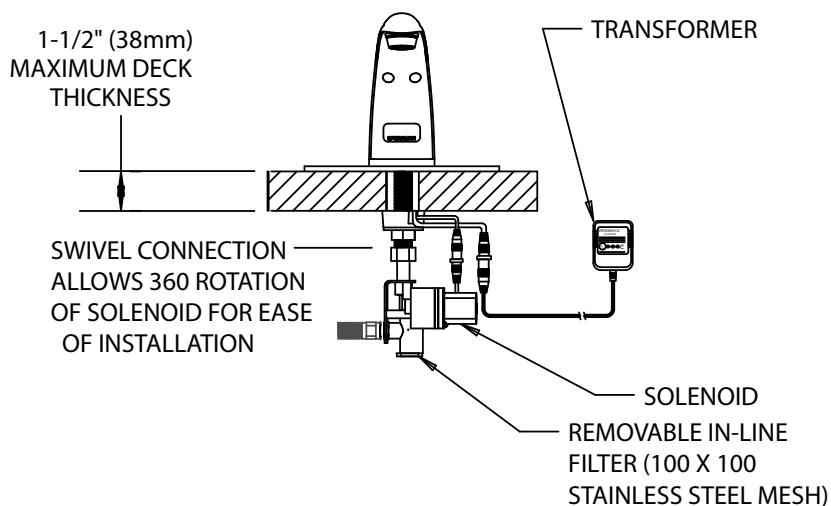


S-8800-CA-E

S-8801-CA-E

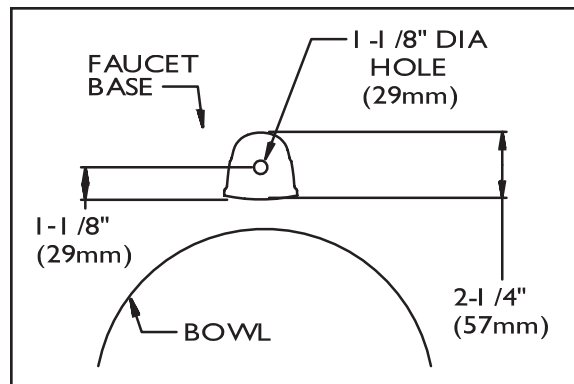


S-8810-CA-E

S-8811-CA-E

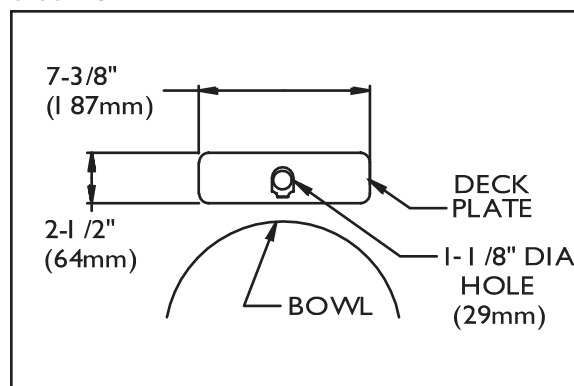

S-8820-CA-E

S-8821-CA-E

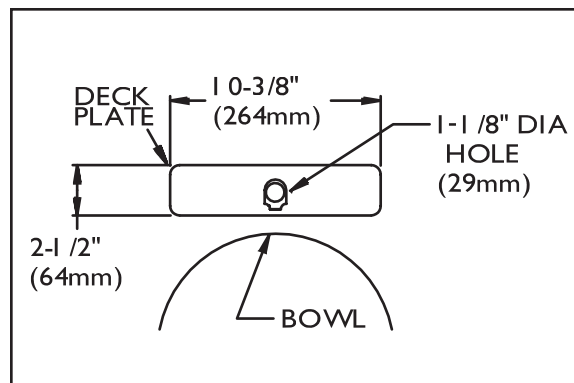

Sensorflo® AC Powered Lavatory Faucet

S-8812-CA-E

MODELS:

- ❑ S-8812-CA-E: Low profile faucet with 4 in. deck plate.
- ❑ S-8822-CA-E: Low profile faucet with 8 in. deck plate.

FEATURES:

- Above counter hot/cold mixer with built-in check valves and adjustable temperature limit stop.
- Solenoid with built-in filter.
- Includes hose needed to make mixer connection.
- UL/CSA approved transformer 120 VAC to 12 VDC with waterproof connectors.
- Lead-free construction.
- Spout consists of all metal chassis and removable cover.
- Vandal-resistant 60-second time out feature.
- Water conserving vandal-resistant flow control reduces flow to 0.5 gpm (1.89 L/min).
- NOTE: Stainless steel flexible supply hoses, 3/8 in. compression, to supply stops not included, see add-ons below.

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified
- NSF 61 certified
- NSF 372 certified

FINISH:



PC

ADD-ONS:

- 0.5 gpm Boca spray outlet & 1.5 gpm laminar flow outlet kit
- Two (2) stainless steel flexible supply hoses to supply stops
- Under counter thermostatic mixing valve
- Vandal-resistant screws for removable cover and custom wrench
- 1.2 gpm laminar flow outlet
- 1.2 gpm aerator
- Tee with integral check valves

❑ A-BOLF

❑ A-HS

❑ A-TMV

❑ A-VRS

❑ A-ELF

❑ A-EA12

❑ A-TEE

OPTION: Add suffix to model

- Less transformer

❑ -LT

WARRANTY:


- 5 Year Limited




S-8822-CA-E





DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.
2. Inlet is 3/8" compression with male threads. Position faucet as close to the edge of the sink as possible.

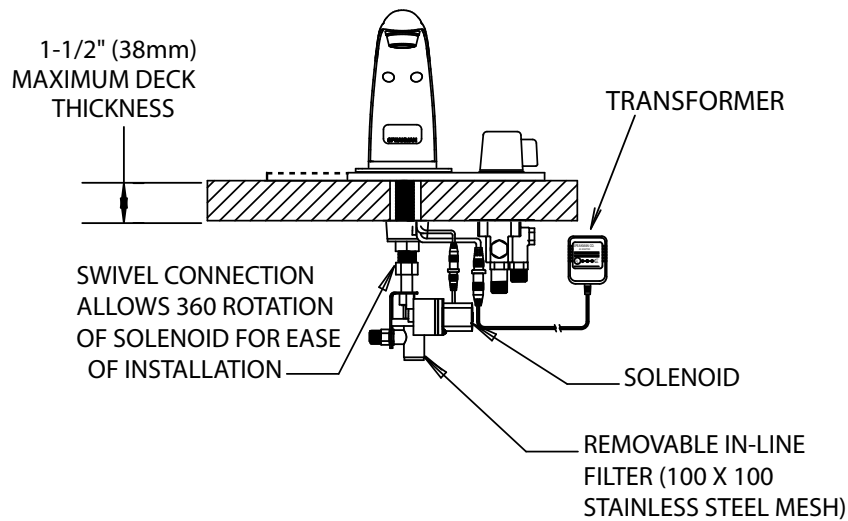

S-8812-CA-E

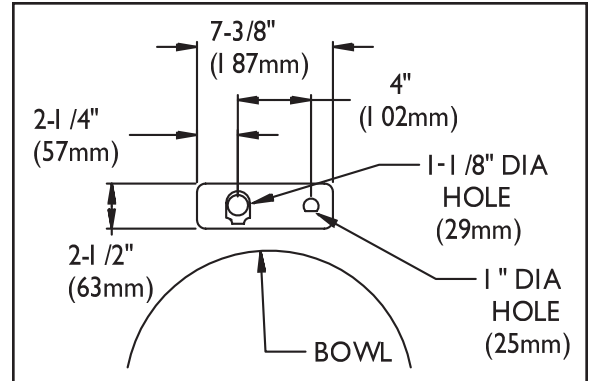

S-8822-CA-E

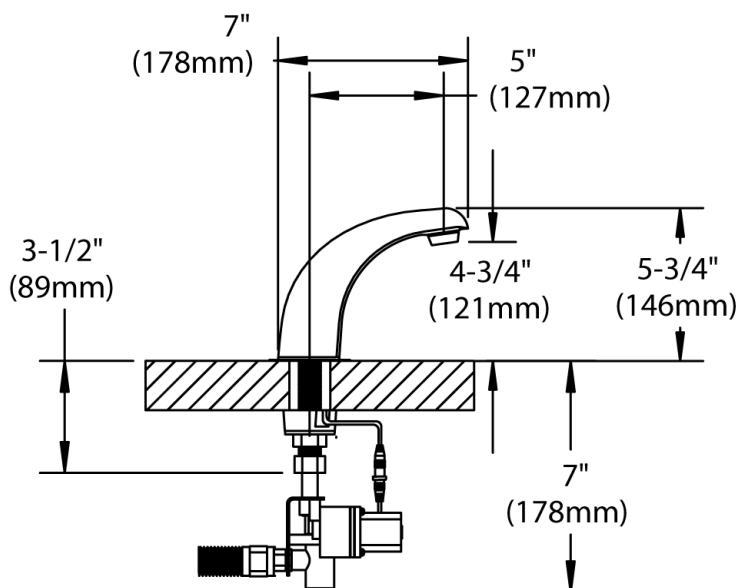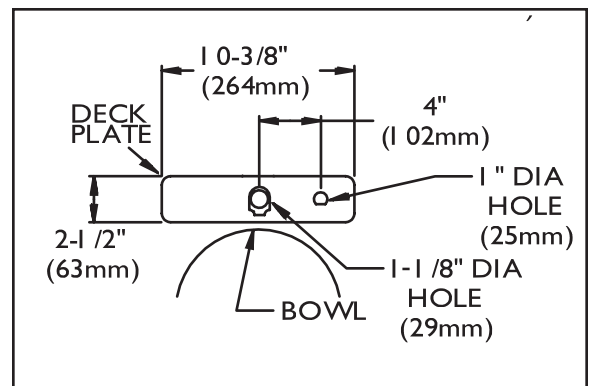

Sensorflo® AC Powered Lavatory Faucet

MODELS:

- ❑ S-8817-CA-E: Low profile faucet with 4 in. deck plate.
- ❑ S-8818-CA-E: Low profile faucet with 4 in. deck plate, under counter mechanical mixer with built-in backflow check valves.
- ❑ S-8827-CA-E: Low profile faucet with 8 in. deck plate.
- ❑ S-8828-CA-E: Low profile faucet with 8 in. deck plate, under counter mechanical mixer with built-in backflow check valves.

FEATURES:

- Ceramic manual override valve activates the faucet for continuous operation in the event of battery drain or user preference.
- Solenoid with built-in filter.
- Includes hoses needed to make manual override connections.
- UL/CSA approved transformer 120 VAC to 12 DC with waterproof connectors.
- Lead-free construction.
- Spout consists of all metal chassis and removable cover.
- Vandal resistant 60-second time out feature.
- Water conserving vandal-resistant flow control reduces flow to 0.5 gpm (1.89 L/min).
- NOTE: Stainless steel flexible supply hose(s), 3/8 in. compression, to supply stop(s) not included, see add-ons below.

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified
- NSF 61 certified
- NSF 372 certified

FINISH:



PC

ADD-ONS:

- | | |
|---|----------|
| • 0.5 gpm Boca spray outlet & 1.5 gpm laminar flow outlet kit | ❑ A-BOLF |
| • Two (2) stainless steel flexible supply hoses to supply stops | ❑ A-HS |
| • One (1) stainless steel hose for tempered water systems (S-8817, S-8827 only) | ❑ A-HTS |
| • Under counter thermostatic mixing valve | ❑ A-TMV |
| • Vandal-resistant screws for removable cover and custom wrench | ❑ A-VRS |
| • 1.2 gpm laminar flow outlet | ❑ A-ELF |
| • 1.2 gpm aerator | ❑ A-EA12 |
| • Tee with integral check valves | ❑ A-TEE |

OPTION: Add suffix to model

- Less transformer
- ❑ -LT

WARRANTY:

- 5 Year Limited


S-8817-CA-E
S-8818-CA-E



S-8827-CA-E
S-8828-CA-E




DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.
2. Inlet is 3/8" compression with male threads. Position faucet as close to the edge of the sink as possible.

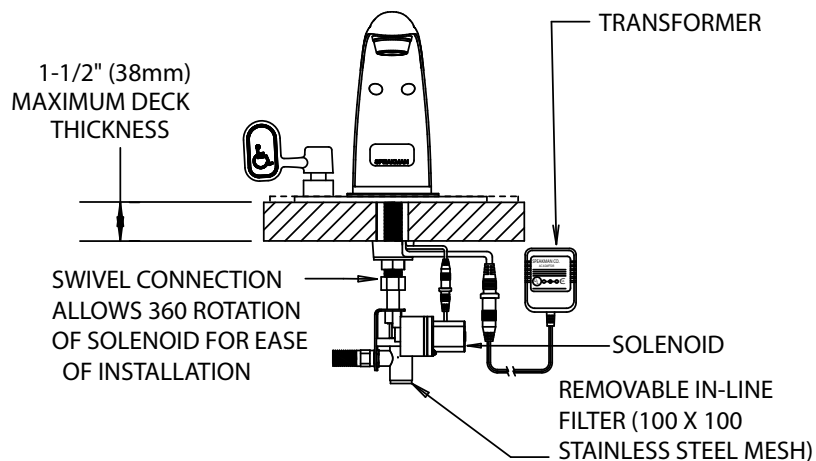



S-8817-CA-E

S-8818-CA-E

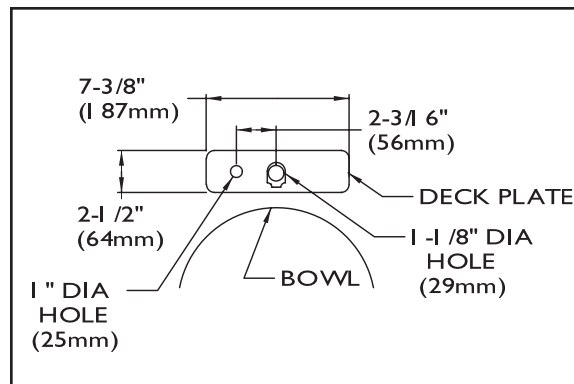

S-8827-CA-E

S-8828-CA-E

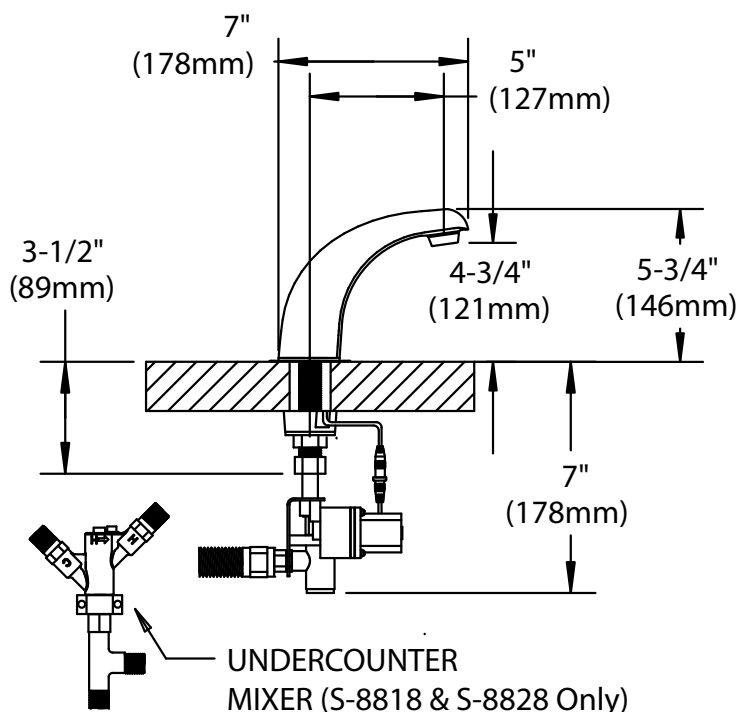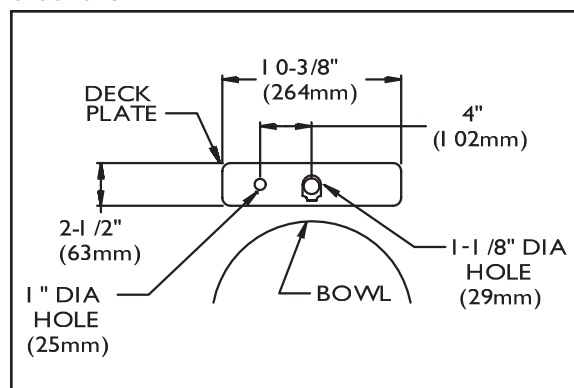

SPEAKMAN® S-8829-CA-E

Sensorflo® AC Powered Lavatory Faucet

FEATURES:

- Above counter hot/cold mixer with built-in check valves and temperature limit stop.
- Ceramic manual override valve activates the faucet for continuous operation in the event of battery drain or user preference.
- Solenoid with built-in filter.
- Includes hoses needed to make mixer and manual override connections.
- Includes 8 in. deck plate.
- UL/CSA approved transformer 120 VAC to 12 DC with water proof connectors.
- Lead-free construction.
- Spout consists of all metal chassis and removable cover.
- Vandal resistant 60-second time out feature.
- Water conserving vandal-resistant flow control reduces flow to 0.5 gpm (1.89 L/min).
- NOTE: Stainless steel flexible supply hoses, 3/8 in. compression, to supply stops not included, see add-ons below.



COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified
- NSF 61 certified
- NSF 372 certified

FINISH:



PC

ADD-ONS:

- 0.5 gpm Boca spray outlet & 1.5 gpm laminar flow outlet kit ☐ A-BOLF
- Two (2) stainless steel flexible supply hoses to supply stops ☐ A-HS
- Under counter thermostatic mixing valve ☐ A-TMV
- Vandal-resistant screws for removable cover and custom wrench ☐ A-VRS
- 1.2 gpm laminar flow outlet ☐ A-ELF
- 1.2 gpm aerator ☐ A-EA12
- Tee with integral check valves ☐ A-TEE

OPTION: Add suffix to model

- Less transformer ☐ -LT

WARRANTY:

- 5 Year Limited

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: OCTOBER 2017

DIMENSIONS: NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.
2. Inlet is 3/8" compression with male threads. Position faucet as close to the edge of the sink as possible.

