
YOUR AUTHORIZED CONTINENTAL DEALER



P: 1-866-820-8686 continentalcomfort.com



Consult your owner's manual for complete installation instructions, accurate framing dimensions and proper clearances to combustible material. Check all local and national building codes. All specifications are subject to change without prior notice due to on-going product improvements. Products may not be exactly as shown.

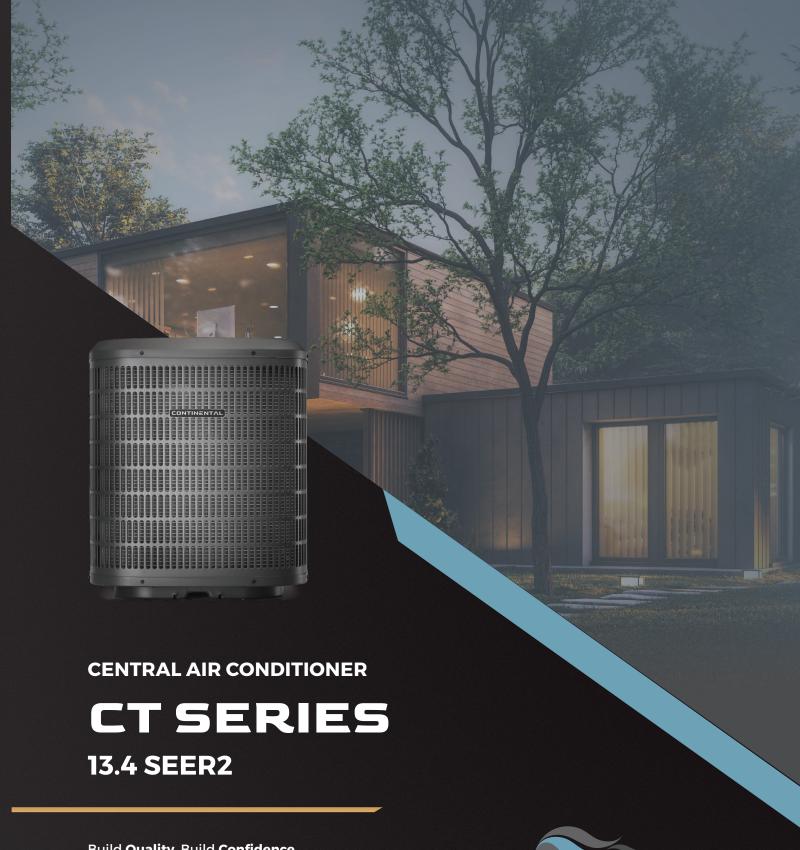

Build **Quality**, Build **Confidence**. **continentalcomfort.com**



CT SERIES 13.4 SEER2

Central Air Conditioner

Continental's CT Series 13.4 SEER2 Central Air Conditioners will easily maintain a cool, comfortable temperature as they dehumidify your home. With quiet operation and a charcoal grey finish, the CT Series will compliment any outdoor living space.

COMPETITIVE ADVANTAGES

- · Highest quality filter drier in the industry
- Motor assembly is removable from top of unit for fast and easy servicing
- Made with environmentally conscious, chlorinefree refrigerant R-410A which reduces power and increases the durability of your compressor
- Service valves and refrigerant connections are located outside the cabinet for easy accessibility and servicing
- · Electrical connections are easily accessible through a removable service panel

FEATURES

- · 13.4 SEER2 Efficiency
- · Advanced Coil Technology
- Industry Leading Scroll Compressor (available in 1.5 to 5 tons)
- · 1.5 to 3 Tons available with Rotary Compressor





SWEPT FAN BLADE TECHNOLOGY

Continental air conditioners are made with modern fan blade technology. The unique swept shape of the blades make Continental air conditioners quiet as they efficiently provide increased air flow. With quality and longevity in mind, Continental's swept fan blades are made with a plated steel hub and aluminum blades for long lasting durability.



13.4 SEER2 EFFICIENCY

DESCRIPTION	WTACR0018RA1	WTACS0018RA1	WTACR0024RA1	WTACS0024RA1	WTACR0030RA1	WTACS0030RA1	WTACR0036RA1	WTACS0036RA1	WTACS0042RA1	WTACS0048RA1	WTACS0060RA1
Size	1.5 Tons	1.5 Tons	2.0 Tons	2.0 Tons	2.5 Tons	2.5 Tons	3.0 Tons	3.0 Tons	3.5 Tons	4.0 Tons	5.0 Tons
Capacity BRU/H	18600	18600	23200	23200	28400	28400	33800	33600	37600	43500	53000
Compressor Type	Rotary	Scroll	Rotary	Scroll	Rotary	Scroll	Rotary	Scroll	Scroll	Scroll	Scroll
Ref Charge (oz) 410A	45	56	45	58	45	57	63	63	80	94	95
Volt -Hz -Phase	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1	208/230 - 60 - 1
Compressor LRA (A)	34	56.3	50	62.9	58	67.8	71	72.2	109	123.9	152.5
Compressor RLA (A)	6.7	9	8.25	10.9	9.9	12.8	13.6	14.1	16.7	17	23.7
Fan Blade Dia. / qty blades	18" / 4	18" / 4	18" / 4	18" / 4	18"/4	24" / 2	24"/2	24"/2	24"/2	24" / 2	24"/2
Condenser Fan FLA / HP / RPM rated	0.7 / 1/6 / 1075	0.7 / 1/8 / 1075	0.7 / 1/2 / 1075	0.7 / 1/8 / 1075	0.7 / 1/8 / 1075	0.8 / 1/6 / 850	0.8 / 1/6 / 850	0.8 / 1/6 / 850	0.8 / 1/6 / 850	0.8 / 1/6 / 850	1.1 / 1/5 / 850
MCA	9	12	11	14.3	13	16.8	18.1	18.4	21.7	22.1	30.7
Max. Fuse/Breaker (A)	15	20	15	25	20	25	30	30	35	35	50
Liquid Line (in)	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
Suction Line (in)	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	7∕8	7∕8	7∕8
DIMENSIONS											
W (inch)	24	24	24	24	24	29 ½	29 ½	29 ½	29 ½	29 ½	29 ½
D (inch)	24	24	24	24	24	29 ½	29 ½	29 ½	29 ½	29 ½	29 ½
H (inch)	27	27	27	27	27	27	27	27	38 %	38 %	47 %
Weight (lb)	150	150	150	150	150	180	180	180	180	230	250