



NANLITE

PavoTube 30C

4ft 2 Point Kit

- 4 ft RGBW LED Tube w/ internal battery 2 light kit
- Maximum output of 2850 lumens per tube (the 4 tubes in this kit produce 1228Lux @1m 5600K when combined)
- Adjustable color temperature from 6500-2700K
- A full spectrum RGB and pre-programmed special lighting effects.
- Flicker-Free Dimming from 100% to 1%
- High CRI/TLCI of 98/95

Studio Quality Lighting

An amazingly versatile studio lighting fixture that featuring 0-100% dimming, a max output of 1400 lumens, adjustable color temperature from 6500-2700K as well as a full spectrum RGB and pre-programmed special lighting effects.

Limitless Possibilities

Simply connect multiple PavoTube RGB+W Tubes together via the included sync cord to build and shape a powerful bank of lights with synchronized adjustments and effects.

Full Creative Control


Easily achieve beautiful results without adding plastic filters or gels. The PavoTube Tubes' easy-to-use dials and buttons enable you to dial temperature from warm to cold (6500K-2700K) or hue and saturation in RGB mode.

Power Anywhere

Perfect for use in the studio or on location, PavoTube RGB+W Tubes can run off either the included AC adapter or their internal Li-ion batteries for up to 2 hours at full brightness when no mains power is available.



| | | |
|----------------|---------------------------|---|
| Technical Data | LED Type | RGB+W LED Tube |
| | Power Consumption | 16W |
| | Power Supply | DC15V 3A, AC 100-240V |
| | Battery Compatibility | Built in Rechargeable Li-Ion |
| | Charge Time to Full | 2-4 Hours (depending on depletion of battery) |
| | Runtime @ 100% Brightness | 2.2 Hours of Runtime at 100% Brightness |
| | CRI (Ra) | 98 |
| | TLCI | 95 |
| | Color Temperature | 2700K-6500K |
| | Dimming | 0-100% |
| | Control | Dimming, 2.4G wireless control |
| | Dimensions | 2 Ft Length / 1.9 Diameter |
| | Weight | 1.9 LBS |
| | Cooling System | Passive |
| | DMX Control | N/A |
| Mount | T12 & 1/4-20 via adaptor | |
| Warranty | Limited 1 year | |

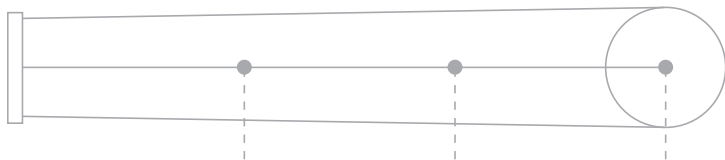

| Distance | 1M | 2M | 3M |
|----------|------------------|------------------|----------------|
| 2700K | 375 lux 34 fc | 99 lux 9 fc | 46 lux 4 fc |
| 3300K | 330 lux 30 fc | 103 lux 9 fc | 53 lux 4 fc |
| 5600K | 352 lux 32 fc | 105 lux 9 fc | 54 lux 4 fc |
| 6500K | 430 lux 39 fc | 117 lux 10 fc | 54 lux 4 fc |