

NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD10-0000.

2. MATERIAL SPECIFICATIONS:
SHELL: STEEL PER ASTM A568
INSULATOR: GLASS-FILLED POLYESTER
CONTACTS: COPPER ALLOY



3. FINISH SPECIFICATIONS:
SHELL: YELLOW CHROMATE OVER ZINC PER ASTM B633
INSULATOR: GREEN

4 CONTACT ARRANGEMENT:
THIS IS A SELECTIVELY LOADED CONNECTOR.
POPULATE ALL PIN POSITIONS EXCEPT
POSITIONS 9, 16, 17.


5 FLOAT BUSHING NOMINAL PLAY
.008 TOTAL AXIAL
.030 TOTAL LATERAL

6. REFER TO CUSTOMER (MKX) DRAWING
AJX-X500C1 REVISION C


REV	DESCRIPTION	BY DATE	APPD
B	ECR07- ER4371	RDG 10/10/07	WIN 10/11/07

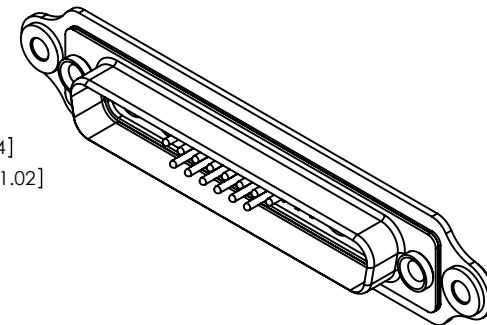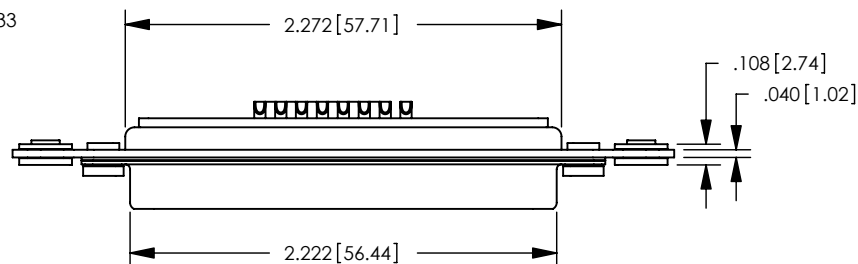

POSITIONS 9,16,17
NOT POPULATED

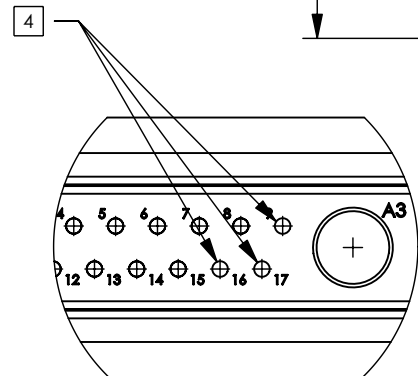

DETAIL A
SCALE 2:1

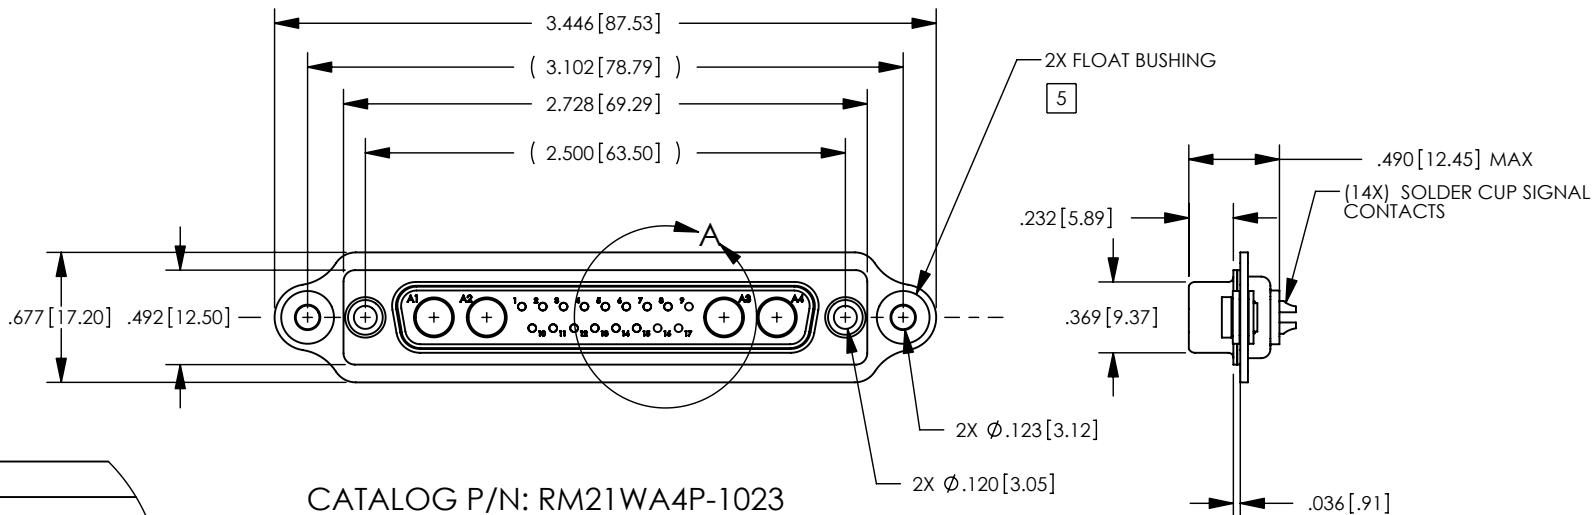

CATALOG P/N: RM21WA4P-1023

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 1:1				 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING				D-SUB PLUG CONNECTOR DEPOPULATED POSITIONS 9, 16, 17	
DRAWN RDG	DATE 06/18/07	APPROVED JC	DATE 06/19/07	A	SDRM21WA4P-1023
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX		
				SHT 1 OF 1	REV B