

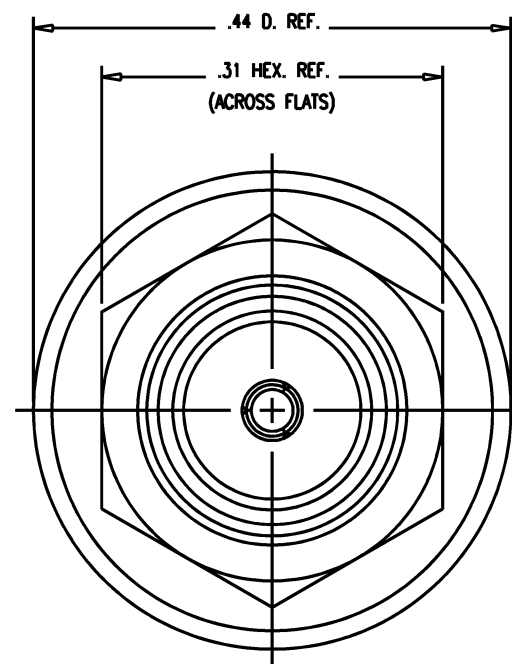


| DASH NO. | M CODE | MADE FROM |
|----------|--------|-----------|
|----------|--------|-----------|

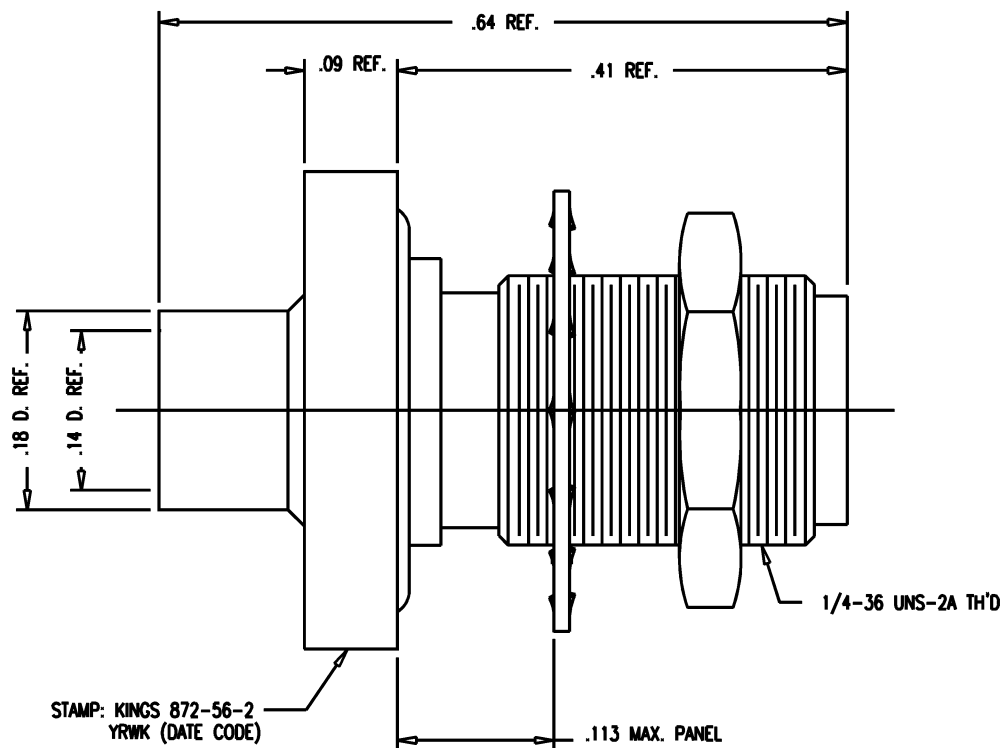

#### NOTES:

- FOR USE WITH RG-402/U (.141 S.R.) CABLE.
- FOR CABLING INSTRUCTIONS SEE 3-482.
- FOR CABLING TRIMMING USE KTO-2.
- INTERFACE PER MIL-STD-348, FIG. 310-1.
- MATERIALS:  
INSULATOR: ASTM-D-1457  
O-RING: SIL. RUB., ZZ-R-765  
BODY & CENTER CONTACT: BER. COP., ASTM-B-196  
ALL OTHER PARTS: STAINLESS STEEL, 303
- FINISHES:  
BODY  
CENTER CONTACT  
LOCK WASHER  
HEX NUT  
} HARD GOLD PLT. PER MIL-G-45204
- ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE: 50 OHMS  
FREQUENCY RANGE: DC TO 18 GHz

SD

872-56-2

#### REVISIONS

| ISSUE | CHANGES                    |
|-------|----------------------------|
| 0     | ER 37754<br>VLS 12/28/98   |
| 1     | CN 38487 C<br>TML 02/25/02 |
| 2     | CN 38545 D<br>TML 04/22/02 |

872-56-2S

SCALE 8:1

APPROX SURFACE AREA

USED ON

REF:

JACK, BULKHEAD, SMA

|            |               |
|------------|---------------|
| DRAWN VLS  | DATE 12/28/98 |
| DESIGN VLS | DATE 12/28/98 |
| APPR. VLS  | DATE 12/28/98 |

**KINGS**  
ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

872-56-2

SD