

ASSEMBLY&INSTALLATION

Please read carefully and save these instructions,as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Line up the holes on rubber washer (23) and glass (22) to the holes of bracket (21), Secure in place with rubber washers (23) and finial (24). Repeat processes for other glasses (22).
(Note:Don't tighten finial(24) until all glass installed on the shell.)
3. Secure stem (19) to the top of fixture (20). Pull wire through the center of top cap (17) and secure stem (19) to the bottom of top cap (17) .
4. Attach connecting belt (18) to the hook of the top cap (17) and to the hook of the bracket (21).
5. Attach mounting bar (6) to outlet box (1) using two outlet box screws (7).
6. Unscrew the collar loop ring (12) from collar loop (13). If necessary use pliers (not included) to spread links of chain (15) apart and remove any links to achieve desired hanging height. Once chain (15) is at desired length, unscrew the quick link (14) on chain (15), but do not remove.
7. Thread collar loop ring (12) and canopy (11) down chain (15), then attach the top quick link(14) to the screw collar loop (13) and the bottom quick link (14) to the fixture loop (16).
8. Weave electrical wires and ground wire up through the chain (15), the collar loop ring (12), the canopy (11) and the nipple (10) preassembled on mounting bar (6), then into outlet box (1).
9. Tie the ground wires (4) from fixture and from outlet box to the ground screw on the mounting strip. Connect the wire (26) without writing on it (with raised ribs) from the fixture to the white wire (neutral wire 2) from the supply circuit. Connect the wire (25) with writing on it from the fixture to the black wire (live wire 3) from the supply circuit.
10. Cover the connections by using provided wire connectors (5). Position wires back inside outlet box (1).
11. Place the canopy (11) over the nipple (10) and tighten the collar loop ring (12) onto the collar loop (13) until the canopy (11) is held firmly against the ceiling.
12. Install the bulbs (not included). Make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.
13. Turn on the power.

INSTALLATION IS NOW COMPLETED

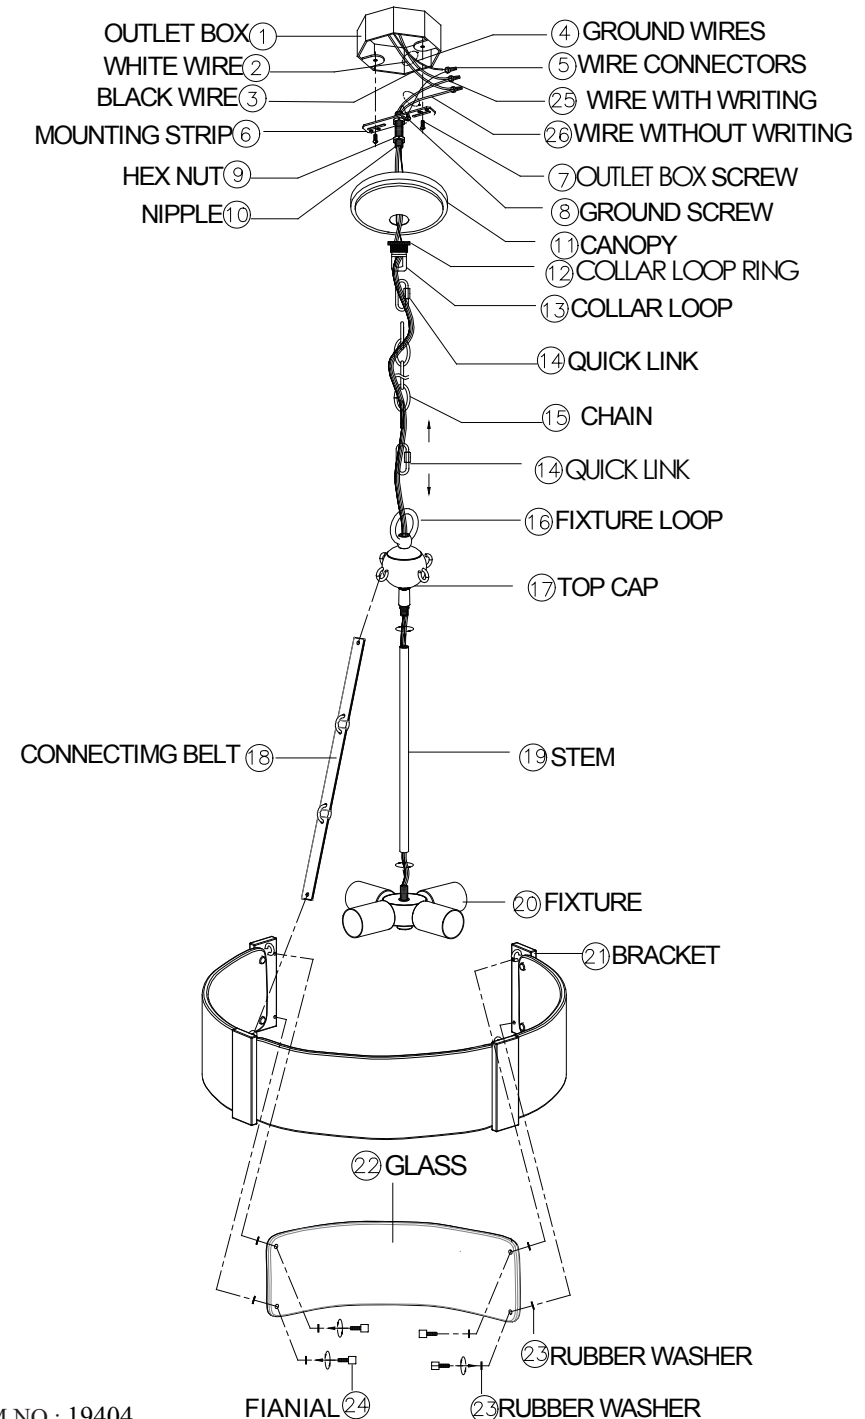

ITEM NO.: 19404