


# GSD

845-8-5

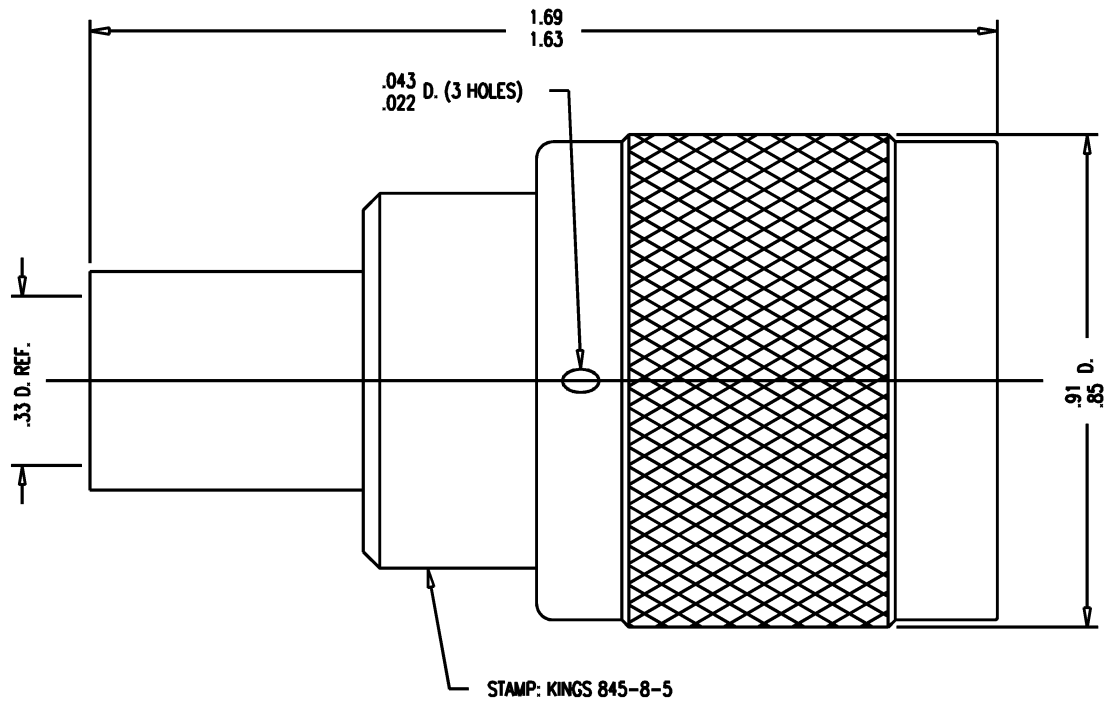

- NOTES:**
1. FOR USE WITH MC AIR ST5M1398-001, 002 & 003 CABLE.
  2. FOR CABLING INSTRUCTIONS SEE 3-597.
  3. FOR CABLE TRIMMING USE KTJ-191, KTD-234 & KTF-5.
  4. FOR CRIMPING USE DIE KTH-2005.
  5. CENTER CONTACT TO BE SUPPLIED UNASSEMBLED.
  6. INTERFACE PER MIL-STD-348, FIG. 317-1.
  7. MATERIALS:  
 INSULATOR: TEFLON, ASTM-D-4894  
 GASKET: SIL. RUB., ZZ-R-765  
 K-GRIP SLEEVE: COM. BRONZE, ASTM-B-135  
 C-RING: PHOS. BRONZE, ASTM-B-103  
 OUTER CONTACT: BER. COP., ASTM-B-196  
 ALL OTHER PARTS: BRASS, ASTM-B16
  8. FINISHES:  
 ALL METAL PARTS: SILVER PLATE PER QQ-S-365
  9. ELECTRICAL CHARACTERISTICS:  
 NOMINAL IMPEDANCE: 50 OHMS  
 VOLTAGE RATING: 1500 VRMS  
 FREQUENCY RANGE: DC TO 4 GHz

# GSD

**REVISIONS**

ISSUE	CHANGES
0	ER 35592 KH 02/03/95

KAM5264

SCALE 4:1

APPROX SURFACE AREA

SUPERSIDES 845-7-5

USED ON

REF: McDONNELL AIRCRAFT /5M1988-003 REV. C

**PLUG, HN**

DRAWN KH 02/03/95

DESIGN LI 02/06/95

APPR. DATE

**KINGS**  
 ELECTRONICS CO., INC.  
 TUCKAHOE, NEW YORK 10707

845-8-5