




Clean removal on most opaque surfaces for up to 6 months in many outdoor and indoor jobs

3M™ Performance Plus Duct Tape 8979 and 8979N

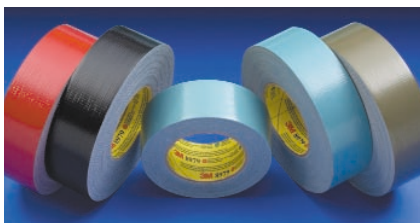

3M™ Performance Plus Duct Tape 8979 is available in slate blue, olive, and black for color coding. Nuclear grade 8979N is available in slate blue and red. A range of widths provides choices in coverage from 24mm (1") to 96mm (4").

3M™ Performance Plus Duct Tape 8979

UPC	Color	Size**	Rolls/case	Cases/pallet
00-048011-53922-5	Slate Blue	24 mm (1")	48	24
*00-021200-56468-0	Slate Blue	48 mm (2")	24	24
00-021200-56469-7	Slate Blue	72 mm (3")	12	30
00-021200-56470-3	Slate Blue	96 mm (4")	12	30
00-048011-58183-5	Slate Blue	144 mm (6")	6	30
*00-048011-53851-8	Slate Blue	48 mm (2")	12**	40
*00-048011-53916-4	Olive	48 mm (2")	24	24
*00-048011-53918-8	Black	48 mm (2")	24	24
00-048011-53920-1	Slate Blue	12"	2	30
00-048011-53919-5	Slate Blue	22"	1	30

3M™ Performance Plus Duct Tape Nuclear Grade 8979N

UPC	Color	Size**	Rolls/case	Cases/pallet
00-048011-58130-9	Red	24 mm (1")	48	24
00-048011-53914-0	Red	48 mm (2")	24	24
00-048011-53915-7	Red	72 mm (3")	12	30
00-021200-74327-6	Slate Blue	48 mm (2")	24	24
00-021200-74328-3	Slate Blue	72 mm (3")	12	30
00-048011-58185-9	Slate Blue	144 mm (6")	6	30

Certified for low leachable halogens and sulfur.

* Each roll individually wrapped and marked with UPC Number. ** All lengths are 54.8 m (60 yards), except 00-048011-53851-8 which is 22.8 m (25 yards).

PRODUCT USE: All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

WARRANTY AND LIMITED REMEDY: Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

LIMITATION OF LIABILITY: Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**Industrial Business
Industrial Adhesives and Tapes Division**

Building 21-1W-10
900 Bush Avenue
St. Paul, MN 55144-1000
1-800-362-3550
www.3M.com/duct

© 2006, 3M. All rights reserved.
70-0709-5358-6

**Answer "yes" to any question below
and 3M™ Performance Plus Duct Tape 8979 and 8979N
is the right answer.**

1 Do you clean adhesive residue after removing tape?

8979 sticks securely on contact and removes cleanly from most opaque surfaces up to six months indoors and outdoors.

2 Do you use tape outdoors?

8979 resists UV, sunlight, and weather to stay on for up to one year without deterioration.

3 Do your tapes come off before you want?


8979 special adhesive adheres immediately and reliably long-term to most surfaces.

4 Do you need to temporarily protect metal from corrosion or contamination?

8979 protects against grime, UV, and weather, then removes cleanly without contaminating areas to be welded.

5 Do you need to protect against light abrasion?

8979 protects against light abrasion including overspray from bead blasting, sand blasting, and shot peening.

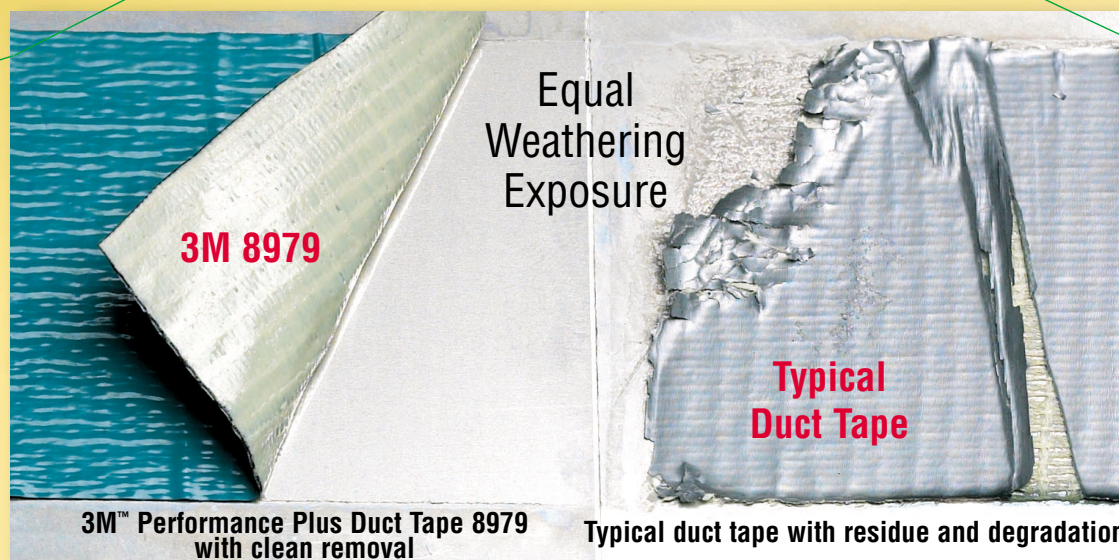

Typical applications

- Holding
- Bundling
- Reinforcing
- Sealing
- Hose repair
- Masking
- Moisture proofing
- Joining
- Pipe wrapping
- Patching
- Splicing
- Hanging poly
- Labeling
- Marking
- Sandblast overspray protection
- Metal protection
- Emergency conveyor belt repair
- Temporary conduit capping

Clean Removal

3M

Clean Removal
Performance Plus
Duct Tape 8979

48mm x 54.8m (1.88 in/po/plug. x 60 yds/v/y)

6

6-Month Clean Removal
from most opaque surfaces
(indoor/outdoor)

UV

UV Resistant

Water Resistant

Water Resistant