



### Specifications:

- 6VDC or 12VDC selectable operation.
  - Turn SW1 OFF for 12VDC operation.  
Turn SW1 ON for 6VDC operation.
  - Current draw: 120mA.
  - 5A/220VAC or 28VDC DPDT contacts.
  - Snap track mountable (order part # ST1).
- Board Dimensions (approximate): 2.75"L x 2"W x 1"H


SW1 DIP Switch

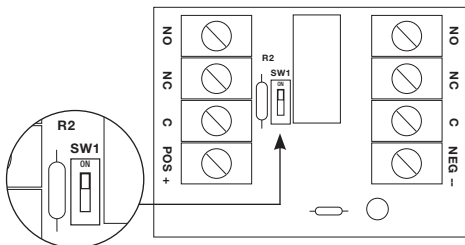


### Dry Contacts




### Polarity Reversal

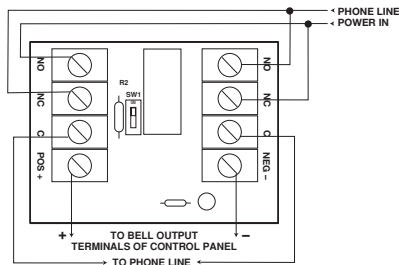

### Latching Dry Contacts

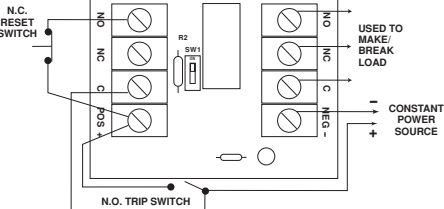

### Line Seizure

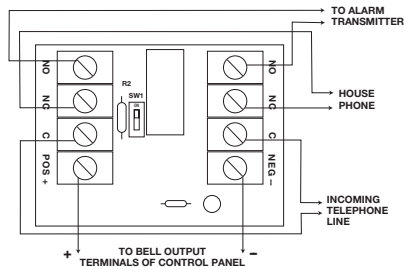

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.