


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	07/10/14	AM

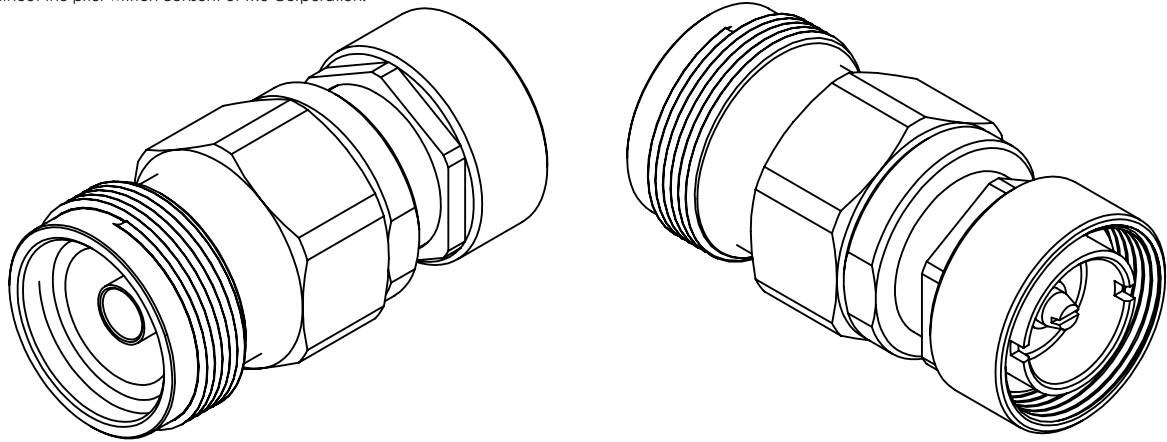

ENGINEERING DATA


ELECTRICAL:
IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: DC to 6 GHz




MECHANICAL:
INTERFACE: 7-16(m) PER IEC 169-4
MEIA-875(f) PER TRU SPEC INT-MEIA-875

MATERIAL:
GASKETS: SILICONE RUBBER
INSULATORS: TEFLON
COUPLING NUT: STAINLESS STEEL
OTHER METAL PARTS: BRASS

FINISH:
COUPLING NUT: PASSIVATED
OTHER METAL PARTS: SILVER PLATED

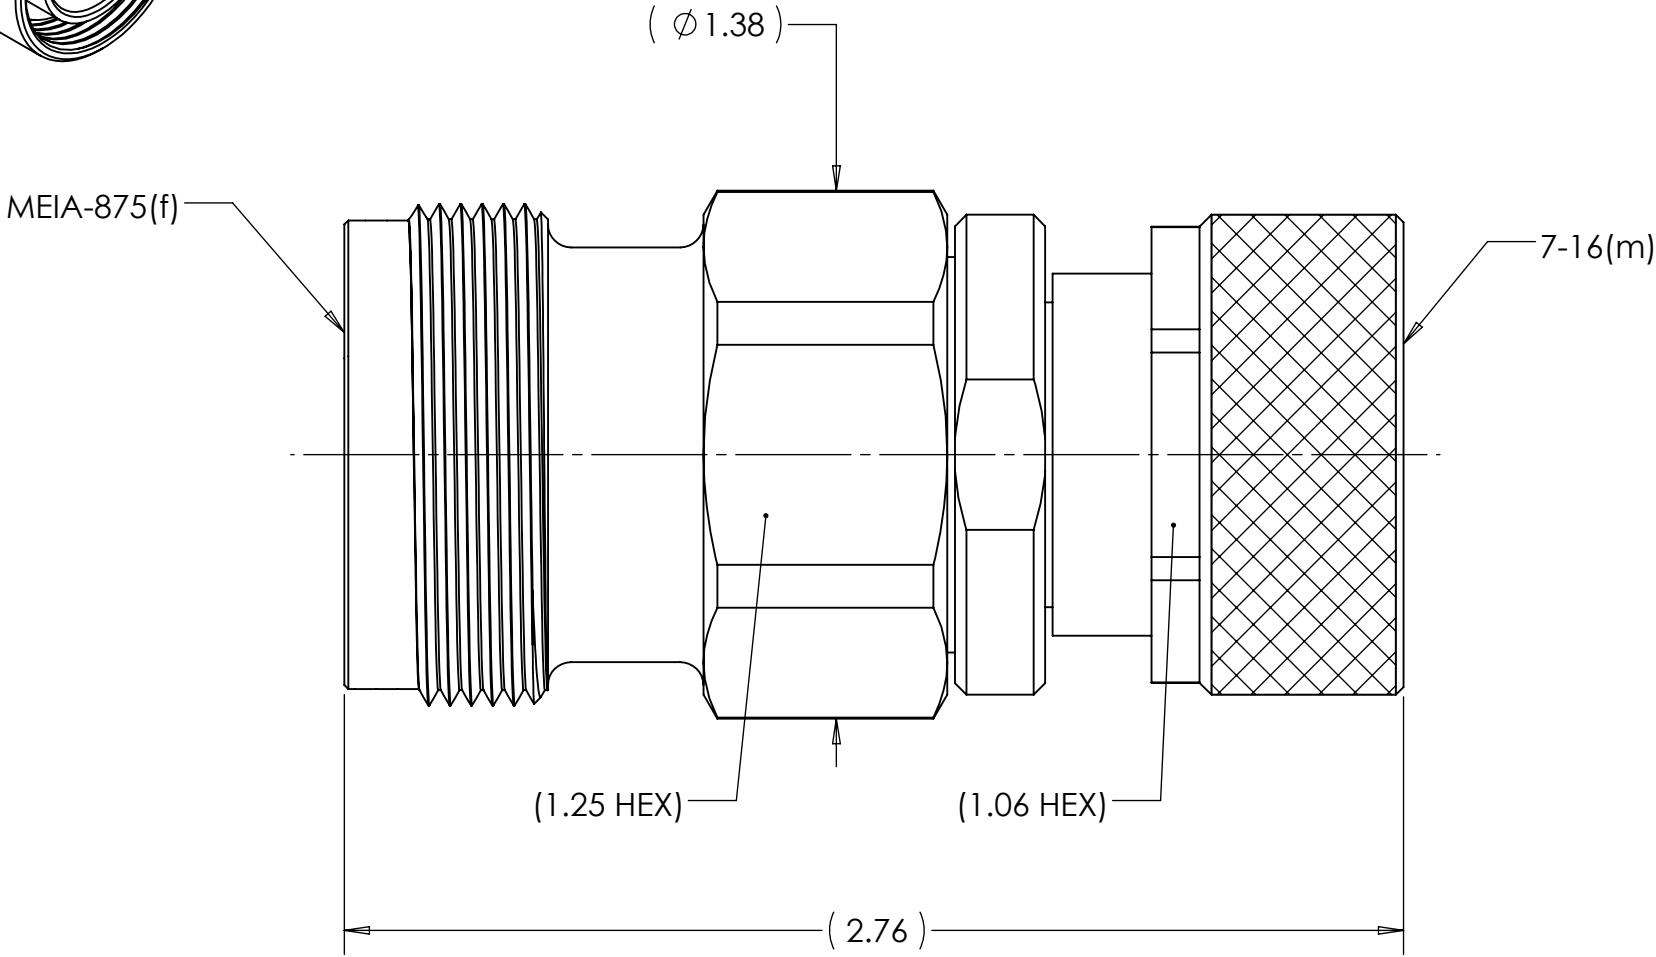NOTES:
1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.



MATERIAL		DO NOT SCALE DRAWING		DRAWN AM		DATE 07/08/14		 TRU Corporation 245 Lynnfield St, Peabody, MA 01960			
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES		ENG APPR. AM		DATE 07/08/14					
COMMENTS:		TOLERANCES: FRACTIONS: ± 1/64 .XX : ± .01 .XXX: ± .005 ANGLES: ± 1/2° MACHINED SURFACES: 		MFG APPR.		DATE		TITLE: CONNECTOR, COAXIAL, RF MEIA-875(f) to 7-16(m) ADAPTER			
				OTHER APPR.		DATE					
				THIRD ANGLE PROJECTION 		SIZE B		DWG. NO. TRU-11889		REV -	
surface area: sq inch		weight: 0.56 lbs				CAGE CODE: 92180		SCALE: 2:1		SHEET 1 OF 1	