






DWG. NO.		RM3W3P-1043	
REV	DESCRIPTION	BY	APPD
A	RELEASED PER ECR 7378	06/10/02	[Signature]

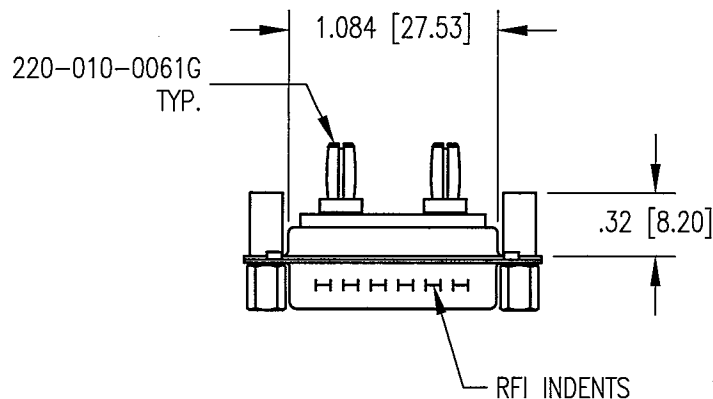

Ø.138 [Ø3.51] TYP.
POWER - SEE DETAIL "A"
⊕ Ø.004 [0.10] (M) A

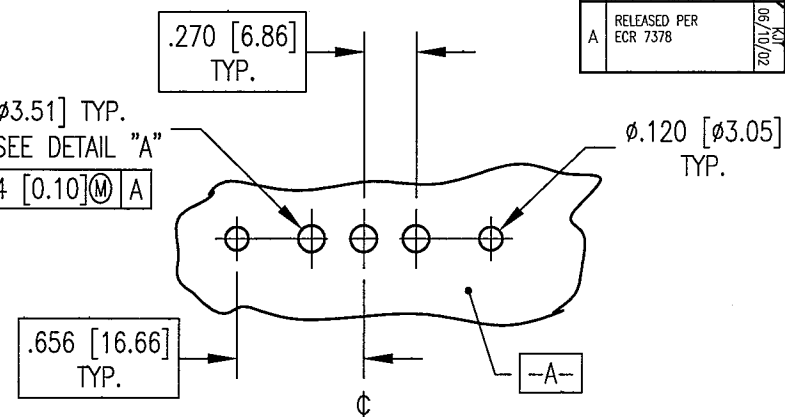

RECOMMENDED MOUNTING
HOLE LAYOUT
(VIEWED FROM COMPONENT SIDE OF PCB)

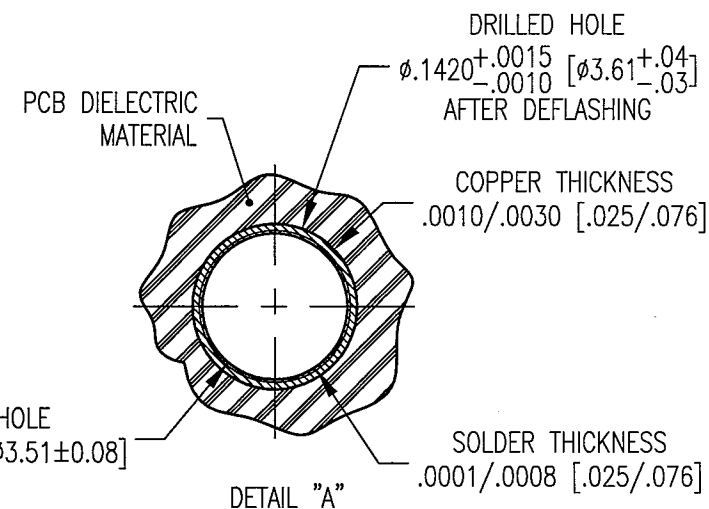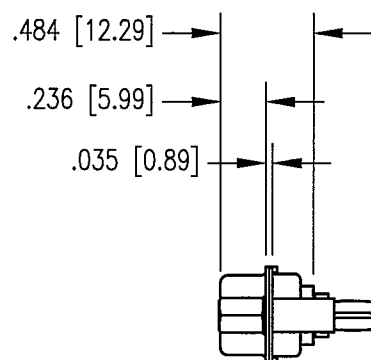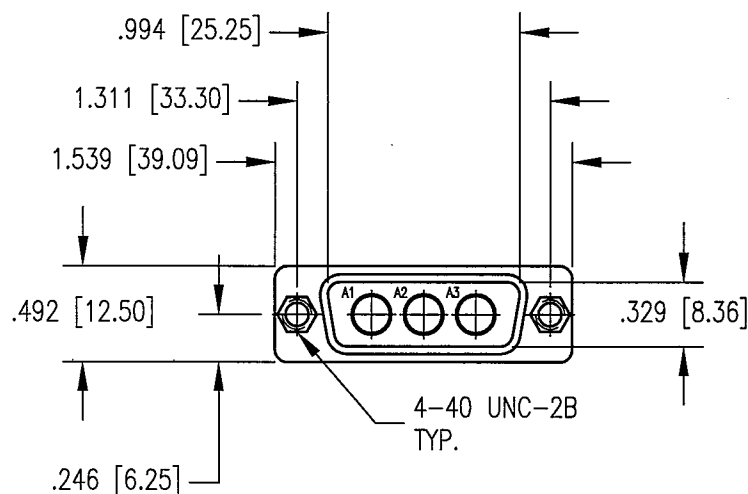

NOTES:

1. MATERIALS:

SHELL: STEEL PER ASTM A568
INSULATOR: GLASS FILLED POLYESTER
STAND-OFFS: BRASS PER ASTM B16
SCREW LOCKS: STAINLESS STEEL PER ASTM A582S
FOR CONTACT SPECIFICATIONS SEE CONTACT SALES DRAWING

2. FINISH:

ALL METAL PARTS: TIN PLATED PER ASTM B545
INSULATOR: GREEN
FOR CONTACT SPECIFICATION SEE CONTACT SALES DRAWING

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]				NORTHROP GRUMMAN			
TOLERANCES: DECIMALS .xx ± .01 [0.254] xxx ± .005 [0.127] ANGLES ± 2°				Winchester Electronics 400 Park Road Watertown, CT 06795			
SCALE: 1:1				TITLE			
CUSTOMER DRAWING				3W3P D-SUB CONNECTOR			
DRAWN JWH	DATE 5/6/02	CHECKED KJT	DATE 5/6/02	A			
APPROVED JEM	DATE 5/6/02	APPROVED JED	DATE 5/6/02	RM3W3P-1043			
				SHT.	OF	REV.	
				1	1	A	