

402203

INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor.

Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

ASSEMBLY AND INSTALLATION

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Assemble the arm (1) to the back plate using the fixture loop (2), plastic washers (3), screw (4), and lock nuts (20).
3. Secure the mounting strip (6) to the outlet box (8) using the outlet box screws (9).
4. Prepare the lanyard by turning the button stop (10) and inserting it completely into the inner back plate (5) slot. Ensure the fixture is securely supported before proceeding to wiring.
5. Connect all electrical wires using wire connectors: join white fixture wire (18) to white supply wire (17), black fixture wire (16) to black supply wire (15), and connect fixture ground wire (13) to supply ground wire (11) using the ground screw (12).
6. Carefully position all connected wires into the outlet box and secure the back plate (5) assembly to the mounting strip using mounting screws (7).
7. Install the appropriate bulb (21, not included) into the socket.

8. Turn on the power and test the light fixture.

INSTALLATION IS NOW COMPLETED

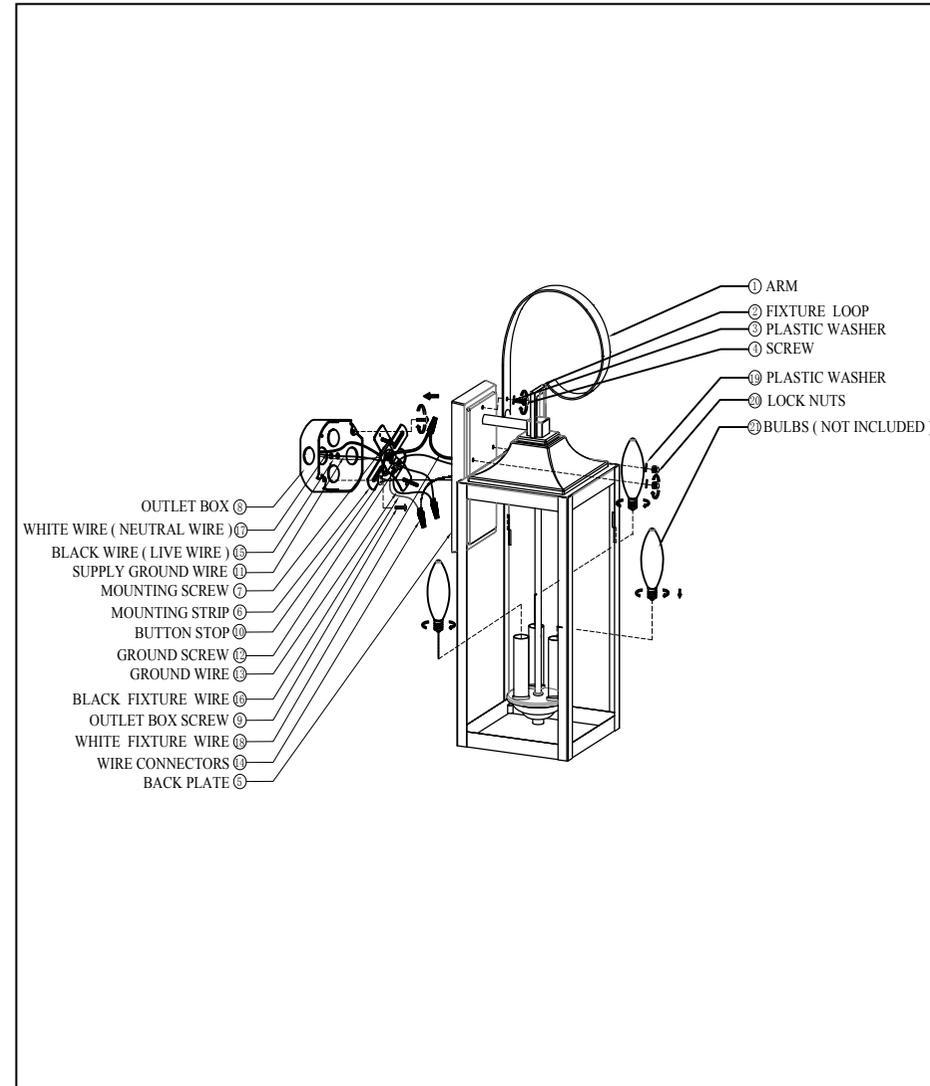

Attach Lanyard

A. The purpose of the lanyard is to provide the installer a means to support the fixture from the junction box while connecting the electrical wires. This enables the fixture to hang from the junction box and your hands are free to make the wire connections .

B. Turn the Button Stop so it may be inserted into the inner Backplate slot. Make sure the Button Stop is completely inside the crossbar. Slowly release the fixture to make sure it is supported by the Button Stop. Proceed to the wiring steps. Once you are complete with the wiring there is nothing to do with Lanyard. The Lanyard will push into the junction box when the fixture is placed for final mounting.

