

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The AL combines clean, fine lines with a unique design that complements any space. The completely luminous optical system provides a concave visual appearance while providing high fixture performance and even illumination. AL is also available with a number of control options thus providing the ability to dim or control the lighting providing the ability to save energy and operate with multiple control systems including daylight or occupancy sensors.

**CONSTRUCTION** — Housing formed from **cold-rolled steel**. Housing is **painted after fabrication** for superior finish. **Hinged doorframe assembly** retains optical assembly and easy access to electrical components. End plates include integral T-bar clips.

**OPTICS** — Luminous optical system consists of a unique blend of high performance transmittance diffuser coupled with a concave, clear, ribbed refractor for and unique multi-step appearance. To improve fixture performance and eliminate pixilation the diffuser uses a unique blend of high molecular weight polymer beads with unrelated refractive index.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (**L90/60,000**).

nLight® embedded controls make each luminaire addressable - allowing it to digitally communicate with other nLight enabled controls such as dimmers, switches, occupancy sensors and photocontrols. Simply connect all the nLight enabled control devices and the AL luminaires using standard Cat-5 cabling. Unique plug-and-play convenience as devices and luminaires automatically discover each other and self-commission. Lumen Management: Unique lumen management system (option N80) provides onboard intelligence that actively manages the LED light source so that constant lumen output is maintained over the system life, preventing the energy waste created by the traditional practice of over-lighting.

Step-level dimming option allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Driver disconnect provided where required to comply with US and Canadian codes.

**INSTALLATION** — Lightweight and easy to install in any standard T-Bar system.

Maintenance: LED boards include **plug-in connectors** for easy replacement or servicing.

**Suitable for damp locations.**

**LISTINGS** — CSA Certified to meet U.S. and Canadian standards. **IC rated**.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

Tested to LM80 standards.

**BUY AMERICAN** — Product with the **BAA option** is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

**AL SERIES**

**2ALL**




2' X 4'  
LED



## DIMENSIONS

All dimensions are inches (centimeters) unless otherwise specified.

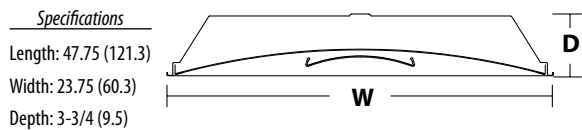

### CSA+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background\***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background\***

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

\*See ordering tree for details

# 2ALL4 Architectural Lighting 2'x4'



A+ Capable options indicated by this color background.

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** 2ALL4 48L EZ1 LP835 N100

2ALL4		Lumens <sup>1</sup>		Voltage		Driver	
<b>Series</b>	2ALL4 Recessed LED 2x4	30L	3000 lumens	(blank)	MVOLT (120-277V)	EZ1	eldoLED dims to 1% (0-10 volt dimming)
		40L	4000 lumens	347	347V <sup>2</sup>	EZB	eldoLED dims to 0.1% (0-10 volt dimming)
		48L	4800 lumens			GZ1	Dims to 1% (0-10V dimming) <sup>3</sup>
		60L	6000 lumens			GZ10	Dims to 10% (0-10V dimming) <sup>3</sup>
		72L	7200 lumens			EDB	eldoLED DALI <sup>4</sup>
						SLD	Step-level dimming <sup>3</sup>

Color temperature		Control		Options	
LP830	3000 K	(blank)	No controls	EL7L	700 nominal lumen battery pack (Noncompliant with CA T20)
LP835	3500 K	N80	nLight with 80% (L80) lumen management	EL14L	1400 nominal lumen battery pack (Noncompliant with CA T20)
LP840	4000 K	N80EMG	nLight with 80% (L80) lumen management for use with generator supply EM power	E10WLCP	EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS
LP850	5000 K	N100	nLight without lumen management	PWS1836	6' pre-wire 3/8" diameter, 18 gauge, 1 circuit
		N100EMG	nLight without lumen management for use with generator supply EM power	PWS1846	6' pre-wire 3/8" diameter, 18 gauge, 2 circuit
				PWS1846 PWSLV	Two cables: one 6' prewire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge
				PWS1856LV	6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/ low voltage wires
				CP	Chicago plenum <sup>4</sup>
				BAA	Buy America(n) Act Compliant

nLight® Control Accessories: Order as separate catalog number. Visit <a href="http://www.sensorswitch.com/nLight">www.sensorswitch.com/nLight</a> for complete listing of nLight controls.			
<b>WallPod stations</b>	<b>Model number</b>	<b>Occupancy sensors</b>	<b>Model number</b>
On/Off	nPODM [color]	Standard range 360°, ceiling (PIR / dual tech)	nCM 9 / nCM PDT 9
On/Off & Raise/Lower	nPODM DX [color]	Extended range 360°, ceiling (PIR / dual tech)	nCM 10 / nCM PDT 10
Graphic Touchscreen	nPOD GFX	Wide view (PIR / dual tech)	nWV 16 / nWV PDT 16
<b>Photocell controls</b>	<b>Model number</b>	<b>Cat-5 cable bundles (plenum rated)</b>	<b>Model number</b>
Continuous dimming	nCM ADC	10', CAT5 10FT	CAT5 10FT J1
On/Off & Dimming	nCM PC ADC	15', CAT5 15FT	CAT5 15FT J1

Accessories: Order as separate catalog number.	
DGA24	Drywall ceiling adaptor, unit installation

### Notes

- 1 Approximate lumen output.
- 2 Not available with EL7L or EL14L battery packs or SLD driver.
- 3 GZ1, GZ10 not available with any Controls options.
- 4 Not available with N80, N80EMG, N100, N100EMG, PWS1836, PWS1846, PWS1846 PWSLV or PWS1856LV.

# 2ALL4 Architectural Lighting 2'x4'

Performance Data				
Lumen	Package	Lumens	Input Watts	LPW
30L	LP830	3,010.3	25	120.4
30L	LP835	3,074.8	25	123.0
30L	LP840	3,096.4	25	123.9
30L	LP850	3,204.0	25	128.2
40L	LP830	3,828.2	32	119.6
40L	LP835	3,911.2	32	122.2
40L	LP840	3,938.9	32	123.1
40L	LP850	4,077.2	32	127.4
48L	LP830	4,722.9	40	118.1
48L	LP835	4,824.4	40	120.6
48L	LP840	4,858.2	40	121.5
48L	LP850	5,027.3	40	125.7
60L	LP830	5,427.1	47	115.5
60L	LP835	5,543.9	47	118.0
60L	LP840	5,583.9	47	118.8
60L	LP850	5,780.7	47	123.0
72L	LP830	7,490.3	68	110.2
72L	LP835	7,653.2	68	112.5
72L	LP840	7,705.5	68	113.3
72L	LP850	7,976.1	68	117.3

### How to Estimate Delivered Lumens in Emergency Mode

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$


P = Output power of emergency driver. P = 10W for E10WLCP option.

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

LPW = Lumen per watt rating of the luminaire. LPW information available in Performance Data section.

## PHOTOMETRICS

2ALL4 48L EZ1 LP840, 4858.2 delivered lumens, test no. LTL26939P10, tested in accordance to IESNA LM-79.

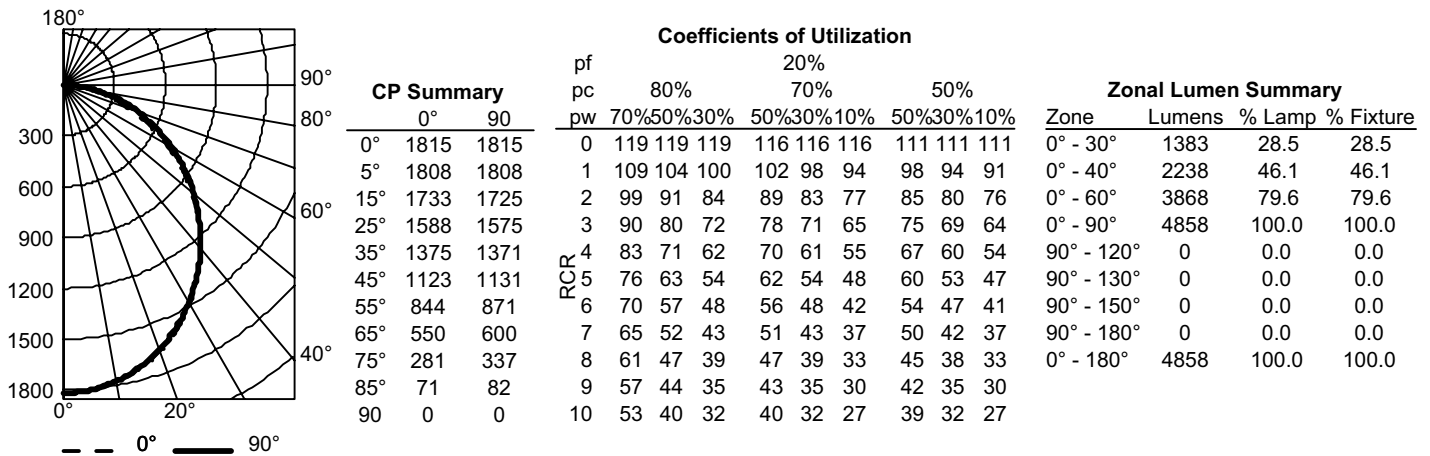

## Constant Lumen Management

Enabled by the embedded nLight control, the ALL actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

