



IRK-000

Integra was the first company to offer an exclusive 6-disc carousel in a CD changer. The tradition continues with the newly redesigned CDC-3.4. It features smooth & quiet mechanical operation, plus a soft blue light which illuminates the disc tray for better visibility. You can also load up to 5 discs while one is still playing for extended listening times without interruption.

ADVANCED FEATURES:

- Original and Exclusive 6-Disc CD Carousel
- Ultra Smooth and Quiet Disc Mechanism
- Direct Digital Path – Direct Shielded Cable Connection to Rear Panel
- High Quality Wolfson 192 kHz / 24-bit Digital to Analog Converter (x2)
- Vector Linear Shaping Circuitry (VLSC) for Noise-free Signal Path
- Multi-bit Digital to Analog Converter
- Cross-Interleaved Reed-Solomon Code (CIRC) Error Correction
- 128-times Oversampling
- Change Up to 5 Discs Without Stopping Playback
- ID3 Tag Recognition
- Anti-Resonant Aluminum Front Panel
- Illuminated Disc Tray

CONNECTIONS:


- 2 Digital Outputs (1 Optical, 1 Coaxial)
- Analog Audio Output
- Parallel Audio Outputs- All Outputs Simultaneously Active
- High-Quality Gold-Plated Terminals for Superior Signal Transmission

PLAYBACK:

- CD-R/RW with MP3 Playback Support
- 6 Repeat Modes: Entire Disc, All Discs, Random Tracks, Memory Tracks, Random Memory, Single Folder, Single Track
- Shuffle / True Random Play (Including MP3)
- Direct Track Access
- 40-Track Memory Playback

CUSTOM INTEGRATION FEATURES:

- Bi-directional RS-232 Control Port
- Rear Panel IR Input and Output
- 9 Unique IR Codes Sets for Stacking Multiple Units
- RI (Remote Interactive) Input and Output
- Optional Rack Mount Kit Available (IRK-155-3D)

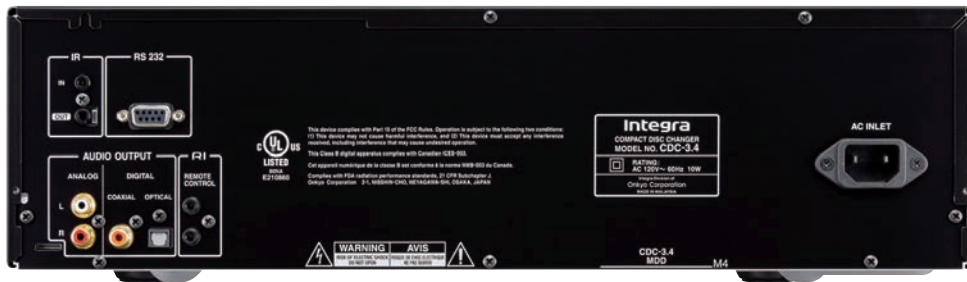

Direct Digital Path

SPECIFICATIONS

AUDIO PERFORMANCE

Error Correction System:	Cross-Interleave Reed-Solomon Code (CIRC)
Multi-Bit D/A Converter:	Wolfson 192 kHz / 24-Bit (x2)
Digital Filter:	128 Times Oversampling
Frequency Response:	5 Hz - 20 kHz
Harmonic Distortion:	0.005% (at 1 kHz)
Dynamic Range:	96 dB
Signal-to-Noise Ratio:	98 dB
Channel Separation:	92 dB (at 1 kHz)
Wow and Flutter:	Below Threshold of Measurability

AUDIO OUTPUTS



Optical:	-22.5dBm Optical Connector
Coaxial:	0.5 V(p-p), 75Ω, RCAx 1
Analog:	2.0 V RMS, 470Ω, RCAx 1

GENERAL

Power Supply:	AC 120 V, 60 Hz
Power Consumption:	10 W
Dimensions (W x H x D):	17-1/8" x 5-3/16" x 17-3/16"
	435 x 131 x 436 mm
Weight:	15.2 lbs. (6.9 kg)
Optional Mounting Kit:	IRK-120-3A
U Dimension:	4U

CARTON

Dimensions (W x H x D):	21-1/4" x 9-3/4" x 21"
	641 x 248 x 533 mm
Weight:	19 lbs. (8.6 kg)

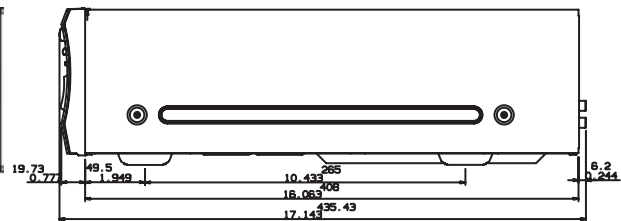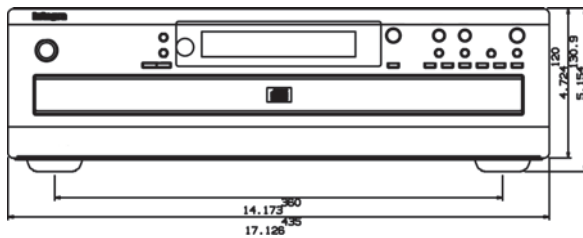

Due to a policy of continuous product improvement, Integra reserves the right to change specifications and appearance without notice.

06/2016 Printed in the USA