

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	06/01/11	TRC

ENGINEERING DATA



ELECTRICAL:
IMPEDANCE- 50 OHMS NOMINAL
FREQUENCY RANGE- DC TO 18 GHz
VSWR MAX- 1.11 :1

MECHANICAL:
INTERFACE- PER MIL-STD-348



MATERIAL:
INSULATOR-TEFLON, NORYL
CONTACTS- BRASS & BERYLLIUM COPPER
BODIES- STAINLESS STEEL & BRASS

FINISH:
CONTACTS- GOLD PLATED
BODIES- GOLD PLATED

ENVIROMENTAL:
TEMPERATURE: 0° C to +85°C

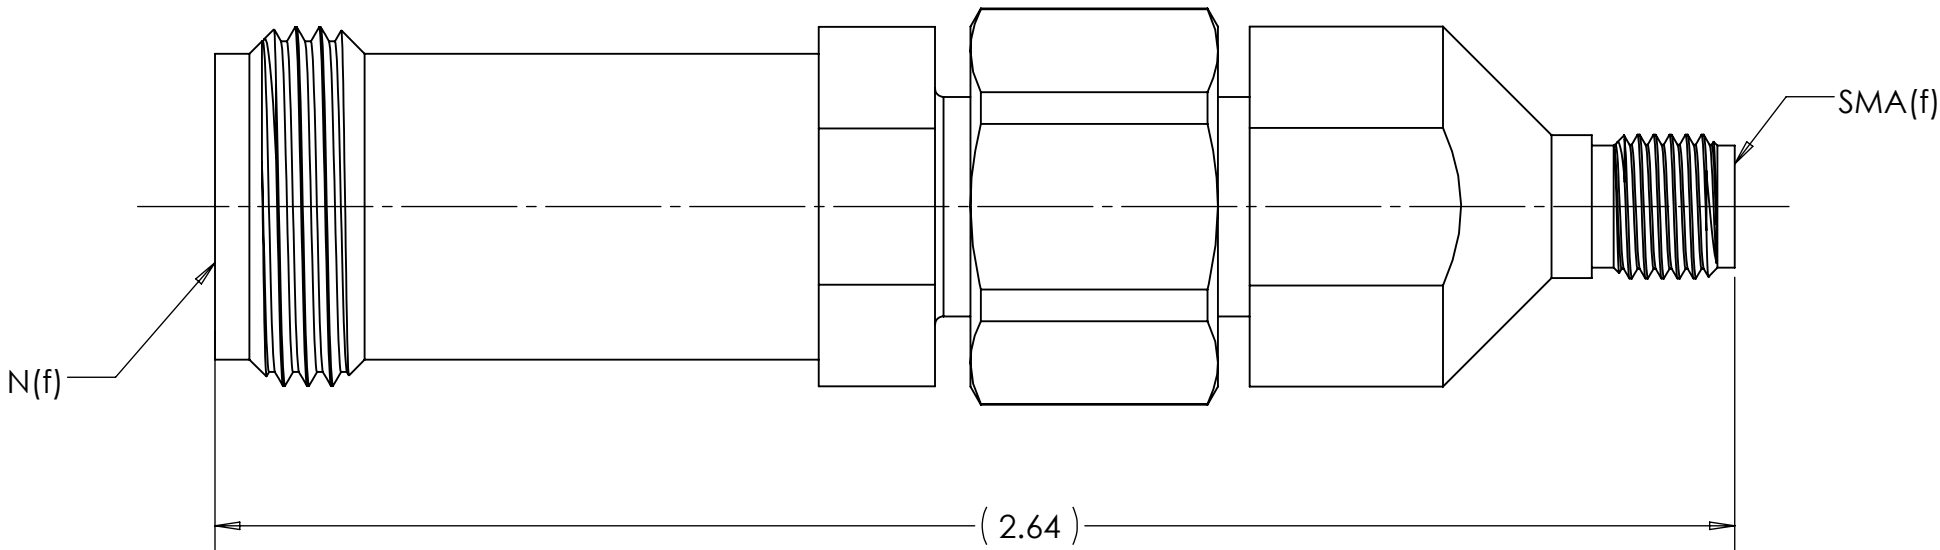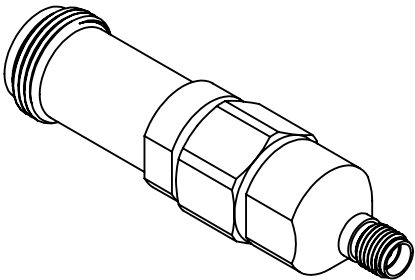

- NOTES:
- UNLESS OTHERWISE SPECIFIED;
ALL DIMENSIONS ARE REFERENCE ONLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN JEF	DATE 5-10-11	<div>TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™</div>		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. TRC	DATE 06/01/11			
	TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2°	MFG APPR.	DATE	TITLE: CONNECTOR, CO-AXIAL N(f) to SMA(f) ADAPTER		
	MACHINED SURFACES: 63/√	OTHER APPR. AM	DATE 05/18/11			
COMMENTS:	THIRD ANGLE PROJECTION 			SIZE B	DWG. NO. TRU-11106-GGX	REV -
surface area: sq inch	weight: lbs	CAGE CODE: 92180		SCALE: 2:1	SHEET 1 OF 1	