

WAC LIGHTING

Paloma LED522

22W W Track Luminaire

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

System Type & Voltage	Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
WHK 277 VAC WTK 120 VAC	LED522	F 36°	27 2700K - 85	1630	4048	BK Black PT Platinum WT White
			30 3000K - 85	1695	4218	
			35 3500K - 85	1745	4345	
			40 4000K - 85	1765	4385	
			927 2700K - 90	1355	3375	
			930 3000K - 90	1695	3500	
		N 24°	27 2700K - 85	1650	5928	
			30 3000K - 85	1625	6177	
			35 3500K - 85	1675	6362	
			40 4000K - 85	1690	6422	
			927 2700K - 90	1301	4940	
			930 3000K - 90	1350	5125	
		S 19°	27 2700K - 85	1590	7622	
			30 3000K - 85	1655	7940	
			35 3500K - 85	1705	8180	
			40 4000K - 85	1720	8257	
			927 2700K - 90	1325	6352	
			930 3000K - 90	1375	6590	

Example: **WHK-LED522F-27-BK**

FEATURES


- Accommodates 1 filter lens or 1 accessory
- Integral selector to choose between independently controllable track circuits
- 365° horizontal rotation and 180° vertical aiming
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS


Construction:	Museum-quality LED luminaire with high performance reflector optics.
Power:	22W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Rated Life:	50000 Hours
Finish:	Electrostatically Powder Coated: White, Platinum, Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Dry Location Listed, Title 24 JA8 Compliant



FINISHES:



LINE DRAWING:

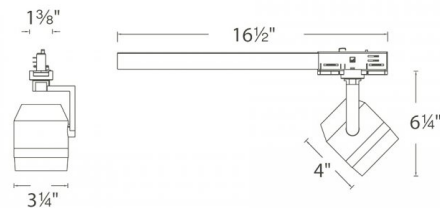

WAC LIGHTING

WAC LIGHTING

Paloma LED522 22W W Track Luminaire





Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	LENS-20-AMB LENS-20-BLU	Colored Lens Colored Lens	Amber Blue
	LENS-20-BEL	Beam Elongating Lens	Beam Elongating
	LENS-20-CL	Clear/Frosted Lens	Clear
	LENS-20-SPR	Spread Lens	Spread Lens