# **SPEAKMAN®**

### Eyesaver® Battery Powered Sensor Eyewash

#### **MODELS:**

- SEF-18107: Eyesaver® Battery Powered Sensor Eyewash
- SEF-18107-8: Eyesaver® Battery Powered Sensor Eyewash w/ 8 in. Spout

#### **EYEWASH FEATURES:**

- Independent water channel for eyewash
- Brass Spindle Valve
- Lift handle activation
- (2) Dedicated Optimus® aerated eyewash sprays with flip top dust caps
- 2.0 GPM (7.6 L/min) @ 30 PSI flow rate
- 1/2" NPT male inlet

#### **FAUCET FEATURES:**

- Low-lead brass construction
- Sensor eye integrated into front of faucet body for easy activation
- Battery powered Sensor- required 6 AA batteries (included)
- Solenoid life exceeds 2.7 million cycles
- 1.2 GPM (4.5 L/min) flow rate
- Inlet supply 3/8" compression with male threads
- Manual override configuration allows for a mechanical method to activate the faucet in the event of power loss

#### **FAUCET OPTION:**

- 8: 8" Gooseneck spout for faucet
- TMV: Thermostatic mixing valve for tepid water during faucet usage

#### **EYEWASH ADD-ONS:**

- A-SEF-NA: Non-aerated eyewash outlets
- SEF-TW: Thermostatic mixing valve for tepid water during eyewash usage

#### **FAUCET ADD-ONS:**

- A-SEF-BOLF: 0.5 GPM (1.89 L/min) faucet flow control and 1.2 GPM (4.5 L/min) laminar faucet flow control kit
- A-SEF-ST: Serrated tip for faucet with vacuum breaker (Not NSF 61/372 compliant)
- A-TMV: Thermostatic mixing valve for tepid water during faucet usage

#### **STANDARDS:**

- ANSI/ISEA Z358.1 certified
- ASME A112.18.1/CSA B125.1 certified
- IGC 272 certified
- NSF/ANSI 61 certified
- NSF/ANSI 372 certified

#### **WARRANTY:**

Visit www.speakman.com for full product warranty information

• 3 Year Limited Warranty (commercial)







Information continues on next page


ENSURE YOU ARE ANSI/ISEA Z358.1 Tepid Water Compliant by incorporating Speakman's 9.7 GPM Thermostatic Mixing Valve.




- STW-370: Thermostatic Mixing Valve (valve only)
- **SEF-TW:** Thermostatic Mixing Valve with necessary connections for SEF products

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice

## Eyesaver® Battery Powered Sensor Eyewash

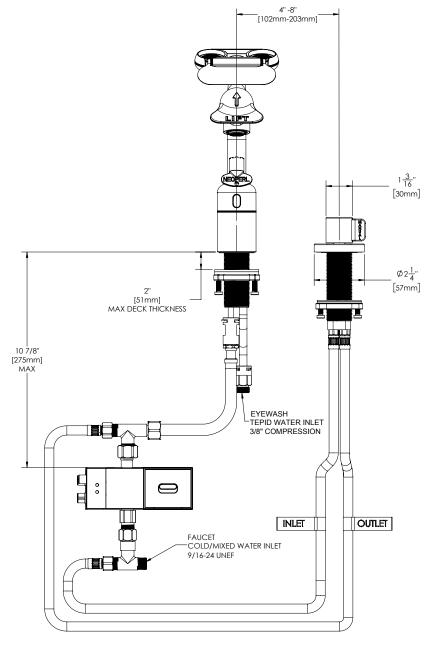



SEF-1800-SL	Sprav	Plume	Lenath	and	Flow

	JLI -I	800-3L 3pray	/ Fluitte Letig	tiraliu i low		
Flowing Pressure	30 psi	40 psi	50 psi	60 psi	70 psi	80 psi
	2.07 Bar	2.76 Bar	3.45 Bar	4.14 Bar	4.83 Bar	5.52 Bar
Flow Rate	gpm	gpm	gpm	gpm	gpm	gpm
	L/min	L/min	L/min	L/min	L/min	L/min
Eyewash Distance	"	"	"	"	"	"
Plume "A"	cm	cm	cm	cm	cm	cm

	3EF-10	00-3L-6 3pre	ay Pluitte Lette	gui and Flow		
Flowing Pressure	30 psi	40 psi	50 psi	60 psi	70 psi	80 psi
	2.07 Bar	2.76 Bar	3.45 Bar	4.14 Bar	4.83 Bar	5.52 Bar
Flow Rate	gpm	gpm	gpm	gpm	gpm	gpm
	L/min	L/min	L/min	L/min	L/min	L/min
Eyewash Distance	"	"	"	"	"	"
Plume "A"	cm	cm	cm	cm	cm	cm

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

P: 800-537-2107

F: 800-977-2747

W: WWW.SPEAKMAN.COM R: 06-APRIL 2024