

For Heating Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

Series OTV

Oil Tank Valves

Sizes: 1/2" x 3/8" (15 x 10mm)

Features

- Metal to metal seat
- Heavy duty brass
- Screwed bonnet
- Rising stem

Pressure – Temperature


Working Pressure Non-Shock: 125psi WOG



Materials

- Body: Brass
- Stem: Brass
- Disc: Brass
- Bonnet: Brass
- Packing: Teflon®
- Packing nut: Brass
- Flare nut*: Brass
- *OTV-FL only

Dimensions – Weights

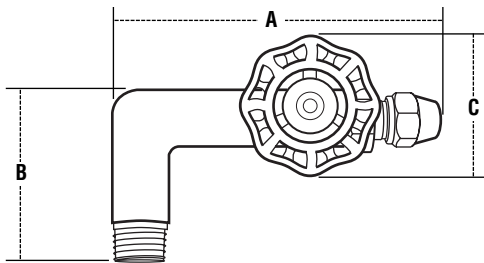

MODEL	SIZE		DIMENSIONS						WEIGHT	
	<i>in.</i>	<i>mm</i>	A		B		C		<i>lbs.</i>	<i>kg</i>
			<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>	<i>in.</i>	<i>mm</i>		
OTV-FL	1/2"M x 3/8"FL	15 x 10	4 ⁹ / ₁₆	116	2 ⁵ / ₈	67	2 ¹ / ₈	53	.70	.32
OTV-M	1/2"M x 3/8"M	15 x 10	4 ⁹ / ₁₆	116	2 ² / ₈	67	2 ¹ / ₈	53	.70	.32

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.wattsreg.com
Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscda.com

