


10" DUAL ZIP-MITERING HORIZONTAL BAND SAW

STANDARD FEATURES:

- Precision machined cast saw head for maximum rigidity and vibration dampening performance
- Advanced direct drive gear box and motor, maximizes the power of the motor to the blade
- Rapid positioning vise allows for fast set-ups and maximum clamping force on the workpiece
- Adjustable zero clearance blade guides utilizing a combination of ball bearing and tungsten carbide pads provide maximum support and ensure square accurate cuts
- Large handwheel with electro-magnetic micro switch preset to insure proper blade tension. Without proper tension, the saw will not start and if the blade loosens or breaks during operation, the saw will stop
- Fine adjustment hydraulic down feed control is easily adjusted to fine tune the blade speed to the material being cut
- Flood coolant system with the coolant fed through both blade guides to maximize cooling and cleaning of the chips from the blade
- Adjustable work stop for repetitive cuts
- Safety electrical package includes overload & low voltage protection, safety spring loaded switch, emergency stop button and two speed motor switch
- Made in Italy

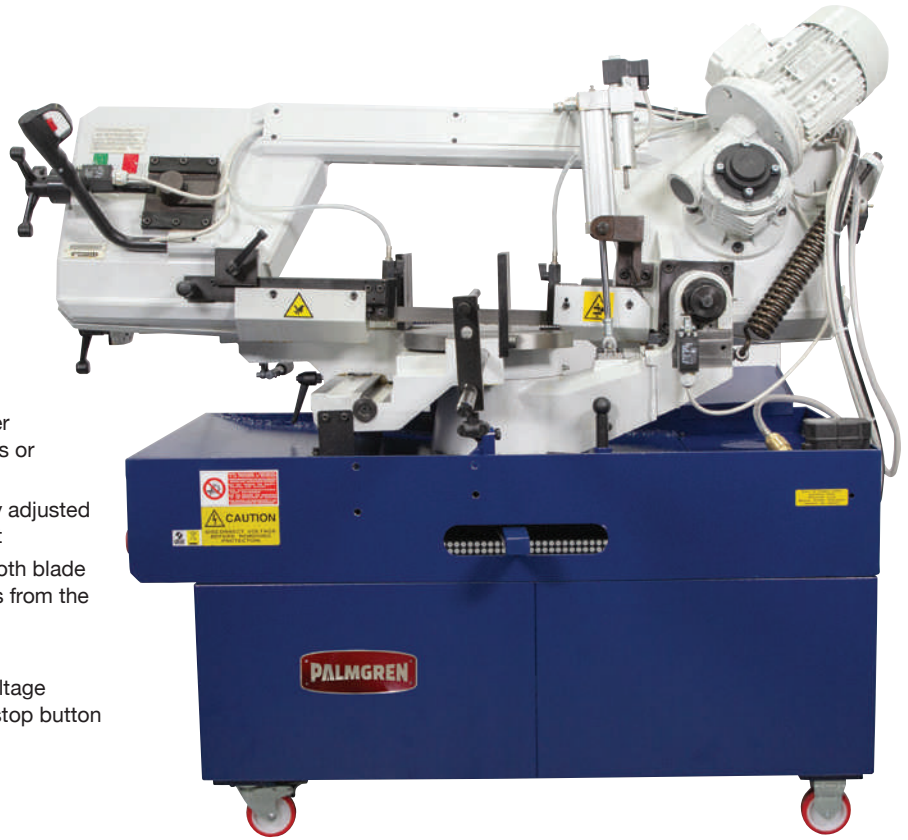

Item #	9683345	9683347
HP	1.5HP	1.5HP
Volts	230V	460V
Phase	3 PH	3 PH
Speed RPM	125-255	125-255
Round Material Max. 0°	10.25"	10.25"
Square Max. 0°	9-13/16" x 9-13/16"	9-13/16" x 9-13/16"
Round Material Max. 45°	8-7/8"	8-7/8"
Square Max. 45°	8-1/4" x 8-1/4"	8-1/4" x 8-1/4"
Round Material Max. 60°	5-1/8"	5-1/8"
Square Max. 60°	5-1/8" x 5-1/8"	5-1/8" x 5-1/8"
Cutting Angle Left/Right	45°/60°	45°/60°
Cutting Angle Adjustment	Manual	Manual
Feed	Hydraulic	Hydraulic
Saw Blade Diameter	1" x 0.035" x 118"	1" x 0.035" x 118"
Vise Opening	13"	13"
Overall Machine Dimensions (L x W x H)	69.3" x 49.8" x 78.1"	69.3" x 49.8" x 78.1"
Machine Weight	803 lbs.	803 lbs.

OPTIONAL ACCESSORIES

Item # 9683362 - Replacement Blade
Bi-Metal, 1" x 0.035" x 118", 5-8 TPI