


SD

2026-34-9

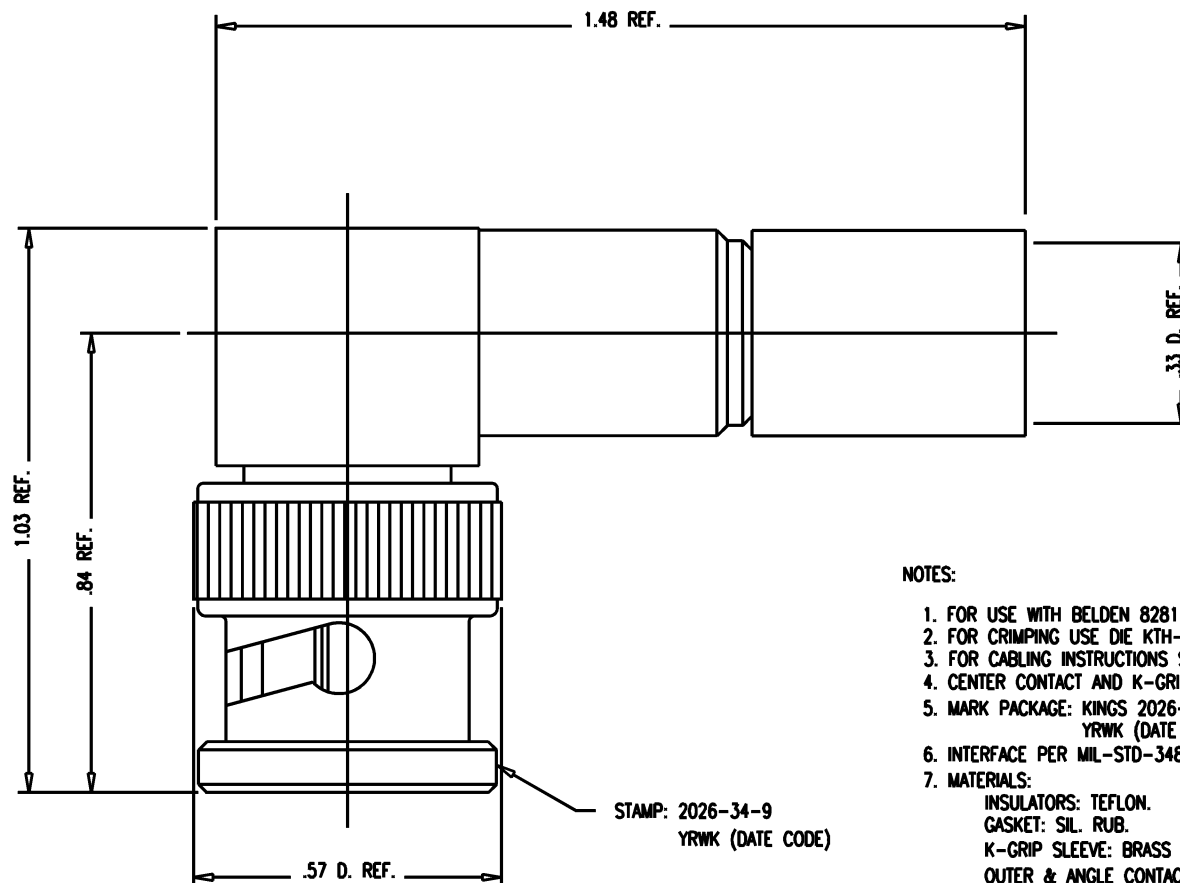

NOTES:

1. FOR USE WITH BELDEN 8281 OR COMM SCOPE 7501 CABLE.
2. FOR CRIMPING USE DIE KTH-2119.
3. FOR CABLING INSTRUCTIONS SEE 3-661-5.
4. CENTER CONTACT AND K-GRIP SLEEVE TO BE SUPPLIED UNASSEMBLED.
5. MARK PACKAGE: KINGS 2026-34-9
YRWK (DATE CODE)
6. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
7. MATERIALS:
INSULATORS: TEFLON.
GASKET: SIL. RUB.
K-GRIP SLEEVE: BRASS OR COMMERCIAL BRONZE.
OUTER & ANGLE CONTACTS } BER. COPPER.
SPRING WASHER }
ALL OTHER PARTS: BRASS.
8. FINISHES:
OUTER CONTACT } SILVER PLATE.
SPRING WASHER }
CENTER CONTACTS: GOLD PLATE.
ALL OTHER METAL PARTS: NICKEL PLATE.
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 75 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 1 GHz

REVISIONS

ISSUE	CHANGES
0	ER 38036 HVN 06/27/00
1	CN 38073 C TML 08/28/00

2026349SD

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PL, ANG, 75 BNC

DRAWN HVN	DATE 02/09/00
DESIGN HVN	DATE 02/09/00
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

2026-34-9

SD