
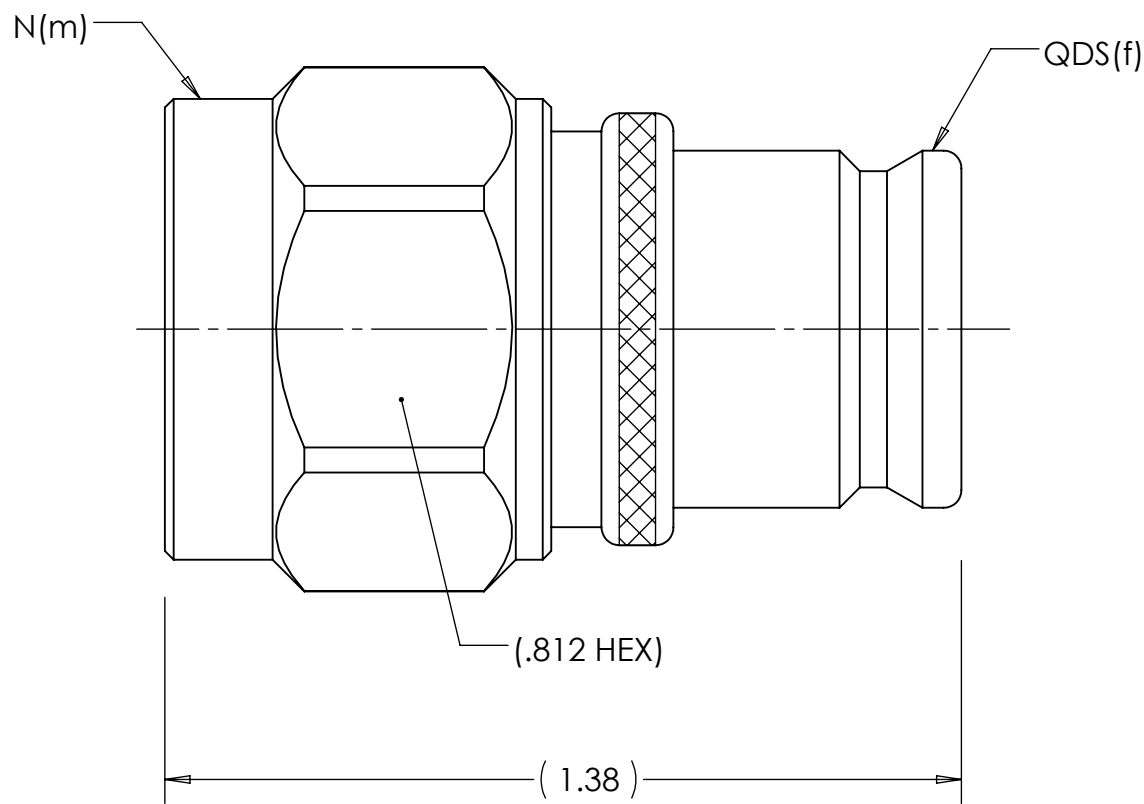


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	09/13/13	AM

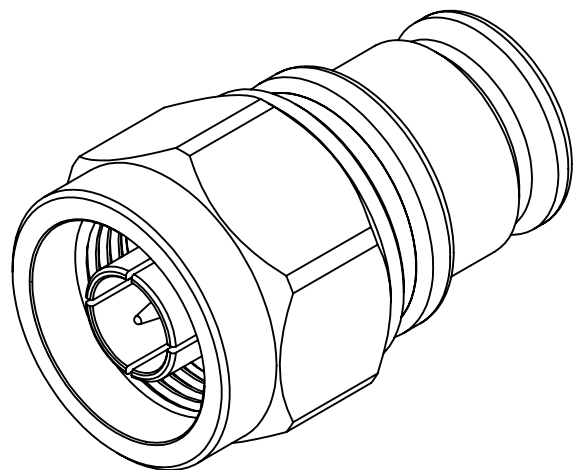

ENGINEERING DATA



ELECTRICAL:
 IMPEDANCE: 50 OHMS NOMINAL
 FREQUENCY RANGE: DC to 6 GHz

MECHANICAL:
 INTERFACE: N(m) per MIL-STD-348 fig. 304.1
 QDS(f) per TRU STANDARD

MATERIAL:
 CONTACTS & CONTACT FINGERS: BERYLLIUM COPPER
 INSULATORS: PTFE
 BODY & COUPLING NUT: BRASS
 GASKET: SILICONE RUBBER

FINISH:
 CONTACTS & CONTACT FINGERS: SILVER PLATED
 BODY & COUPLING NUT: NICKEL PLATED

NOTES:
 1. UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN AM	DATE 09/10/13	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960 <small>EXPERIENCE. TRU INNOVATION.</small>	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: 63/√	ENG APPR. AM	DATE 09/11/13		TITLE: CONNECTOR, COAXIAL N(m) to QDS(f) ADAPTER
MFG APPR.		DATE	SIZE B	DWG. NO. TRU-12455	REV -
OTHER APPR.		DATE	THIRD ANGLE PROJECTION 	CAGE CODE: 92180	SCALE: 3:1
COMMENTS:					
surface area: sq inch	weight: lbs				