


## PS-12120 12 Volt 12.0 AH

### Rechargeable Sealed Lead Acid Battery





We've Got The Power.™

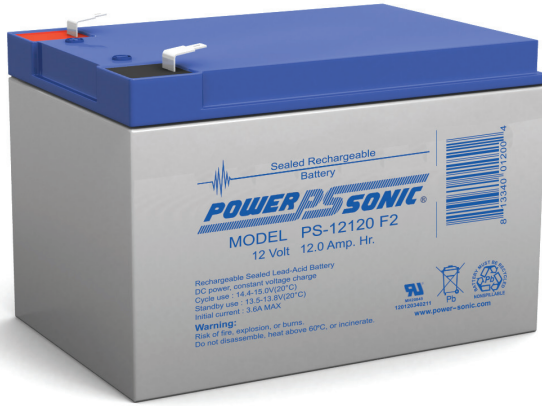


### Terminals: (mm)



- F2 - Quick disconnect tabs, 0.250" x 0.032" - Mate with AMP. INC FASTON "250" series



- NB - Tin plated brass posts with nut & bolt fasteners



### Physical Dimensions: in (mm)



F2: L: 5.94 (151) W: 3.86 (98) H: 3.66 (93) HT: 3.86 (98)

NB: L: 5.94 (151) W: 3.86 (98) H: 3.66 (93) HT: 4.09 (104)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.

### Features

- Absorbent Glass Mat (AGM) technology for superior performance
- Valve regulated, spill proof construction allows safe operation in any position
- Power/volume ratio yielding unrivaled energy density
- Rugged impact resistant ABS case and cover (UL94-HB)
- Approved for transport by air. D.O.T., I.A.T.A., F.A.A. and C.A.B. certified
- U.L. recognized under file number MH 20845

### Performance Specifications

**Nominal Voltage** ..... 12 volts (6 cells)

#### Nominal Capacity

20-hr. (600mA to 10.50 volts) .....	12.0 AH
10-hr. (1.1A to 10.50 volts) .....	11.0 AH
5-hr. (2.1A to 10.20 volts) .....	10.5 AH
1-hr. (7.25A to 9.00 volts) .....	7.25 AH
15-min. (21.5A to 9.00 volts) .....	5.38 AH

**Approximate Weight** ..... 7.92 lbs. (3.59 kg)

**Energy Density (20-hr. rate)** ..... 1.69 W-h/in<sup>3</sup> (103.41 W-h/l)

**Specific Energy (20-hr. rate)** ..... 18.18 W-h/lb (40.08 W-h/kg)

**Internal Resistance (approx.)** ..... 20 milliohms

**Max Discharge Current (7 Min.)** ..... 36.0 amperes

**Max Short-Duration Discharge Current (10 Sec.)** .. 120.0 amperes

#### Shelf Life (% of nominal capacity at 68°F (20°C))

1 Month .....	97%
3 Months .....	91%
6 Months .....	83%

#### Operating Temperature Range


Charge ..... -4°F (-20°C) to 122°F (50°C)

Discharge ..... -40°F (-40°C) to 140°F (60°C)


**Case** ..... ABS Plastic

**Power-Sonic Chargers** ..... PSC-122000A, 122000A-C


**Shelf Life & Storage**

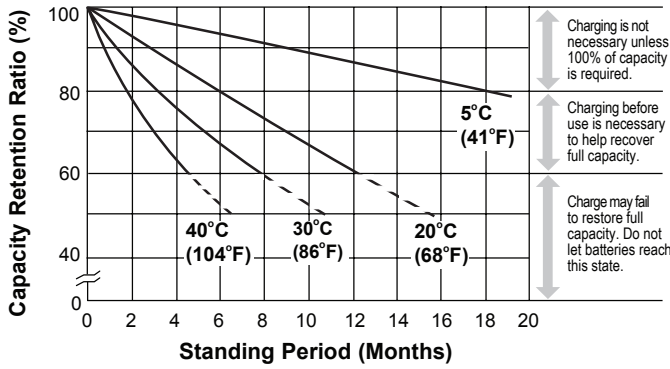


**Discharge Characteristics**

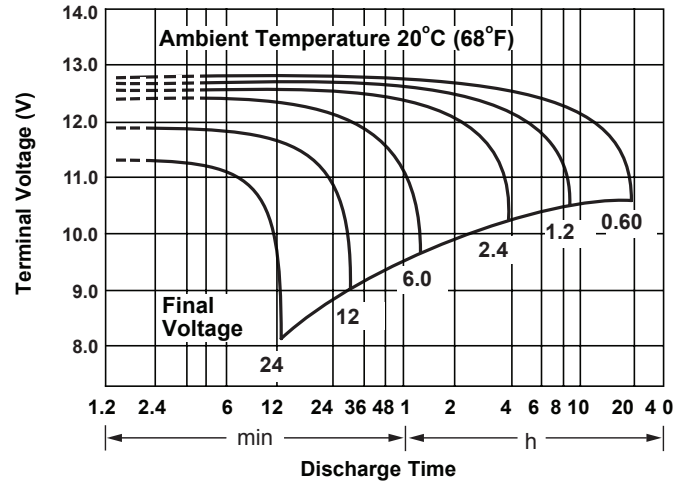

**Discharge Time vs. Discharge Current**

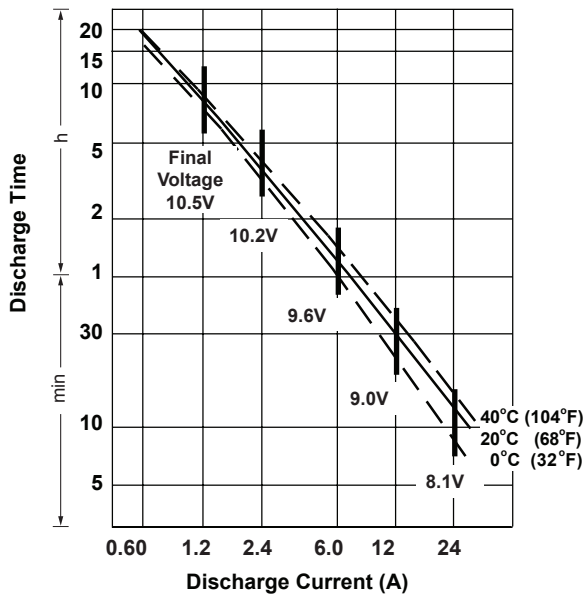

**Life Characteristics in Stand-By Use**

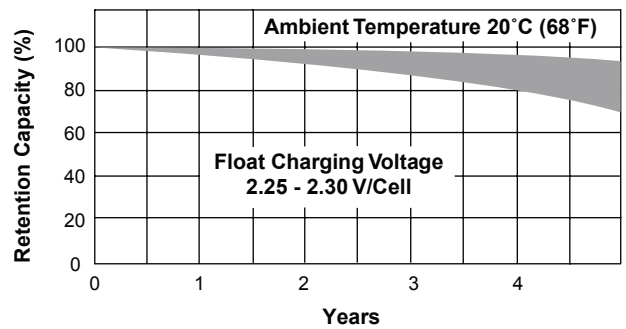


**Charging**

Cycle Applications: Limit initial current to 3.6A. Charge until battery voltage (under charge) reaches 14.4 to 14.7 volts at 68°F (20°C). Hold at 14.4 to 14.7 volts until current drops to under 120mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

"Float" or "Stand-By" Service: Hold battery across constant voltage source of 13.5 to 13.8 volts continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

**Life Characteristics in Cyclic Use**

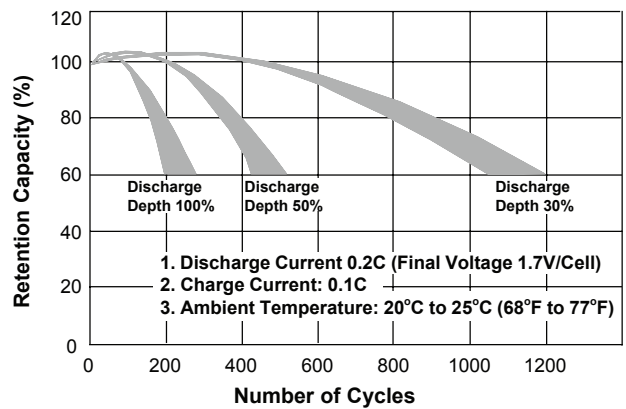

**Chargers**

Power-Sonic offers a wide range of chargers suitable for batteries up to 100AH. Please refer to the Charger Selection Guide in our specification sheets for "C-Series Switch Mode Chargers" and "Transformer Type A and F Series". Please contact our Technical department for advice if you have difficulty in locating suitable models.

**Further Information**

Please refer to our website [www.power-sonic.com](http://www.power-sonic.com) for a complete range of useful downloads, such as product catalogs, material safety data sheets (MSDS), ISO certification, etc..

**Contact Information**

DOMESTIC SALES  
Tel: +1-619-661-2020  
Fax: +1-619-661-3650  
[national-sales@power-sonic.com](mailto:national-sales@power-sonic.com)

CUSTOMER SERVICE  
Tel: +1-619-661-2030  
Fax: +1-619-661-3648  
[customer-service@power-sonic.com](mailto:customer-service@power-sonic.com)

TECHNICAL SUPPORT  
Tel: +1-619-661-2020  
Fax: +1-619-661-3648  
[support@power-sonic.com](mailto:support@power-sonic.com)

INTERNATIONAL SALES  
Tel: +1-650-364-5001  
Fax: +1-650-366-3662  
[international-sales@power-sonic.com](mailto:international-sales@power-sonic.com)