

NOTES: UNLESS OTHERWISE SPECIFIED
1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD59-0000.

2. MATERIAL SPECIFICATIONS:

BODY, RETAINING RING AND NUT: BRASS PER ASTM B16
CENTER CONTACT: COPPER ALLOY
GASKET: SILICONE RUBBER PER A-A-59588
INSULATOR: TEFLON PER ASTM D1710
LOCKWASHER: PHOSPHOR BRONZE

3. FINISH SPECIFICATIONS:


BODY: .00080 MIN TRI-METAL OVER .000100 MIN COPPER PER ASTM B734.
CONTACT: .000030 MIN GOLD PER ASTM B488 OVER
.000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
LOCKWASHER, NUT AND RETAINING RING: .000100 MIN NICKEL PER AMS-QQ-N-290
OVER COPPER FLASH PER ASTM B734.

4. ELECTRICAL SPECIFICATIONS:


NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11GHz

5. GASKET, LOCKWASHER, AND NUT SHIPPED LOOSE.


6. DESIGNED TO MEET INGRESS PROTECTION REQUIREMENTS OF IP67.

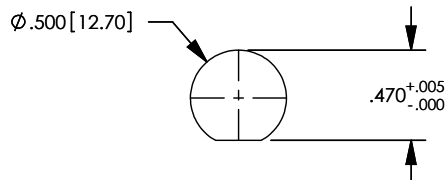

MOUNTING HOLE

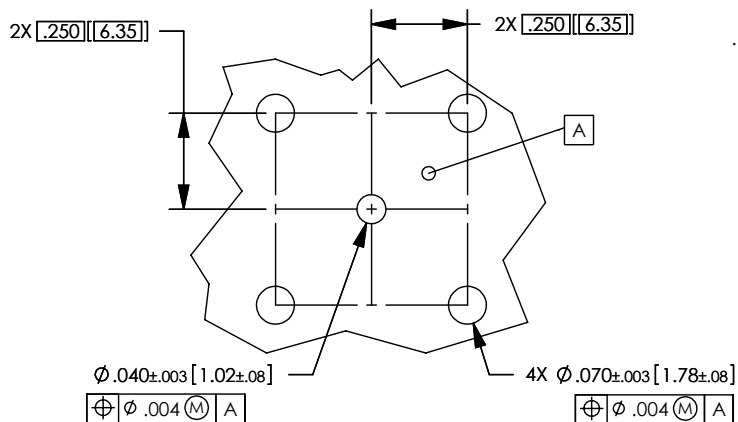

PC BOARD PATTERN

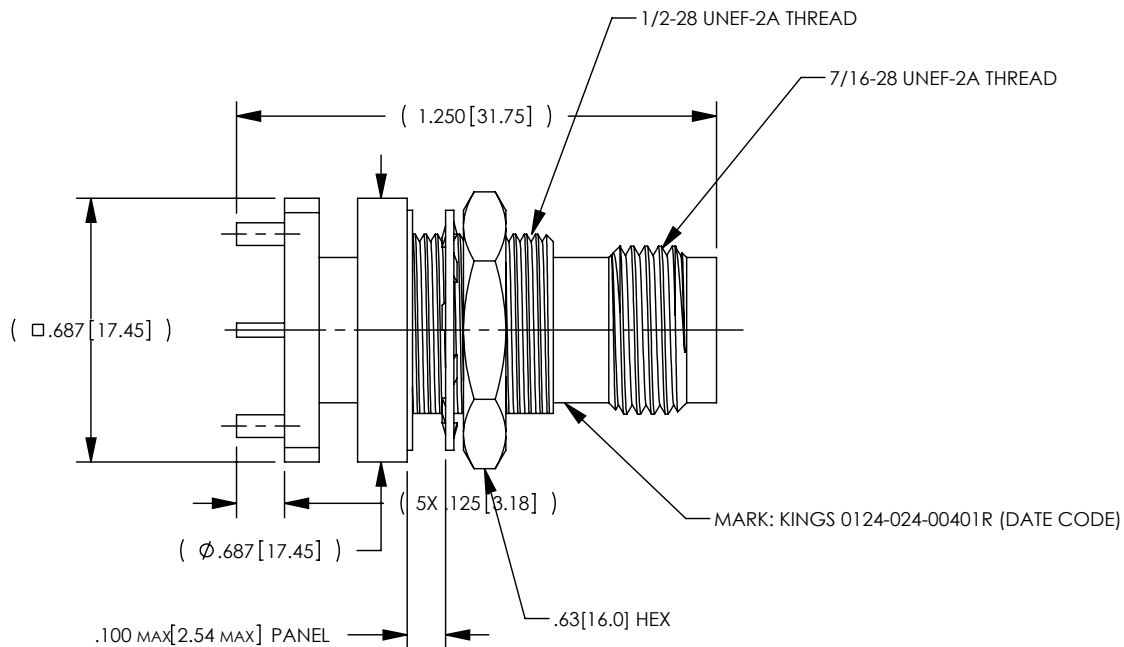

CATALOG P/N: 0124-024-00401R

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2:1				KINGS by WINCHESTER Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER SALES DRAWING				50 OHM TNC, BULKHEAD JACK PCB MOUNT (RoHS)			
DRAWN PSM	DATE 05/24/10	APPROVED DCAM	DATE 05/27/10	A SD0124-024-00401R			
APPROVED DRK	DATE 05/27/10	APPROVED WPM	DATE 05/27/10				
				SHT 1	OF 1	REV 02	