

DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

123-28-9

REVISIONS

ISSUE	CHANGES
0	ER 39026 JLA 02/24/04
1	CN 39616 E HVN 09/07/06

SCALE 4:1

APPROX SURFACE AREA

USED ON LOCKHEED AERONAUTICAL SYS.

REF: EOR 739 & E-20235


JACK, ANGLE, TNC

DRAWN JLA	DATE 12/05/03
DESIGN JLA	DATE 12/05/03
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

123-28-9

GSD

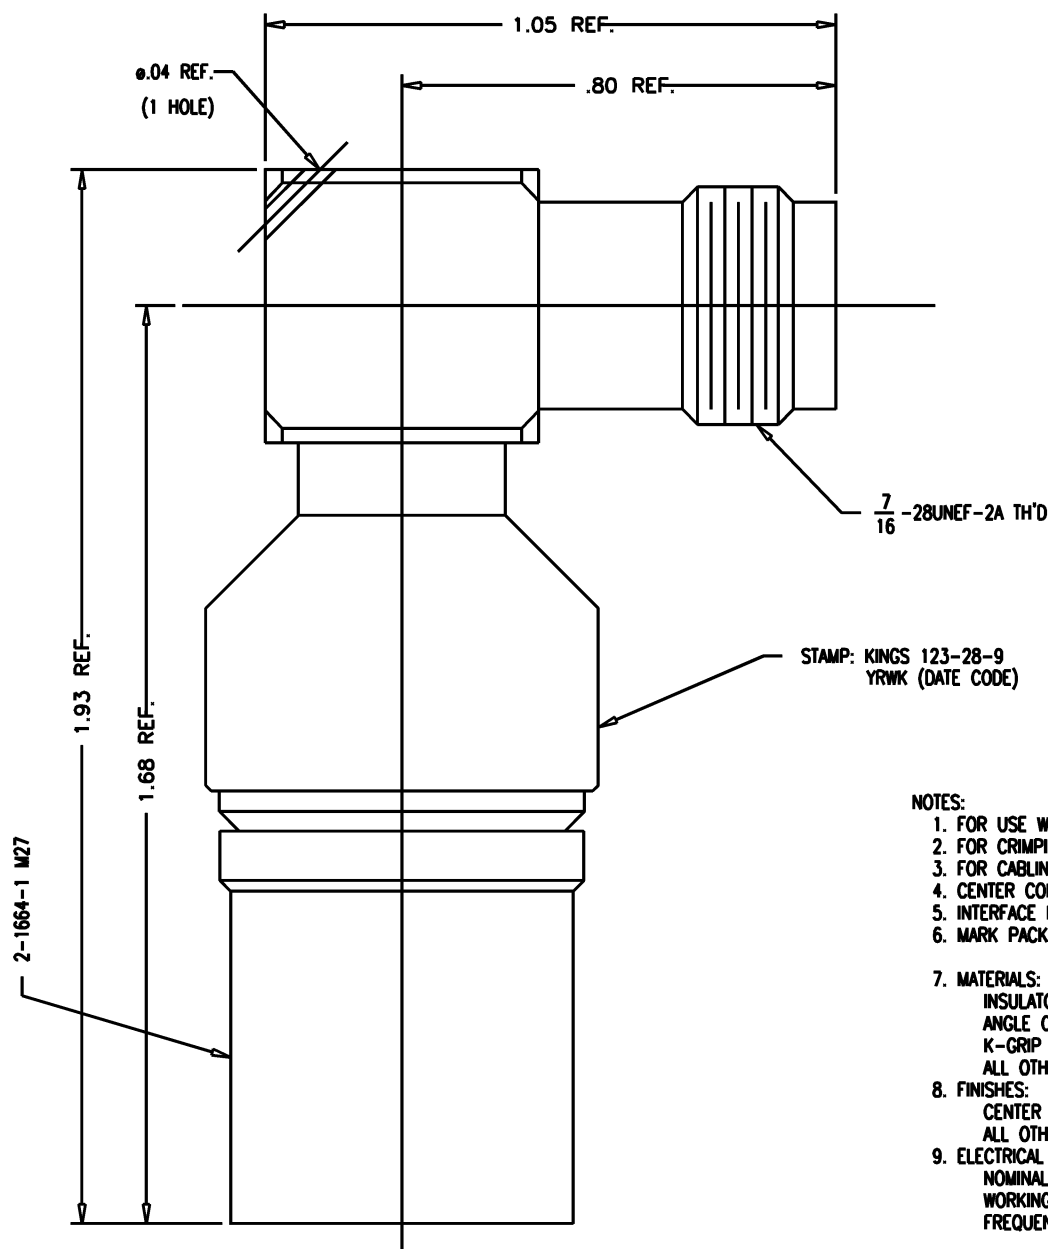

NOTES:

- FOR USE WITH ADAMS RUSSELL FC48Z CABLE.
- FOR CRIMPING USE DIE KTH-2229.
- FOR CABLING INSTRUCTIONS SEE 3-546-2.
- CENTER CONTACT (1-8527-1 MA9) SUPPLIED UNASSEMBLED.
- INTERFACE PER MIL-STD-348, FIG. 313-2.
- MARK PACKAGE: KINGS 123-28-9 YRWK (DATE CODE)
- MATERIALS:
 - INSULATORS: TEFLON, ASTM-D-4894
 - ANGLE CONTACT: BER. COPPER ASTM-B-196
 - K-GRIP SLEEVE: COM. BRONZE, ASTM-B-140
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:
 - CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
 - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 500 VRMS
 - FREQUENCY RANGE: DC TO 11GHz.