


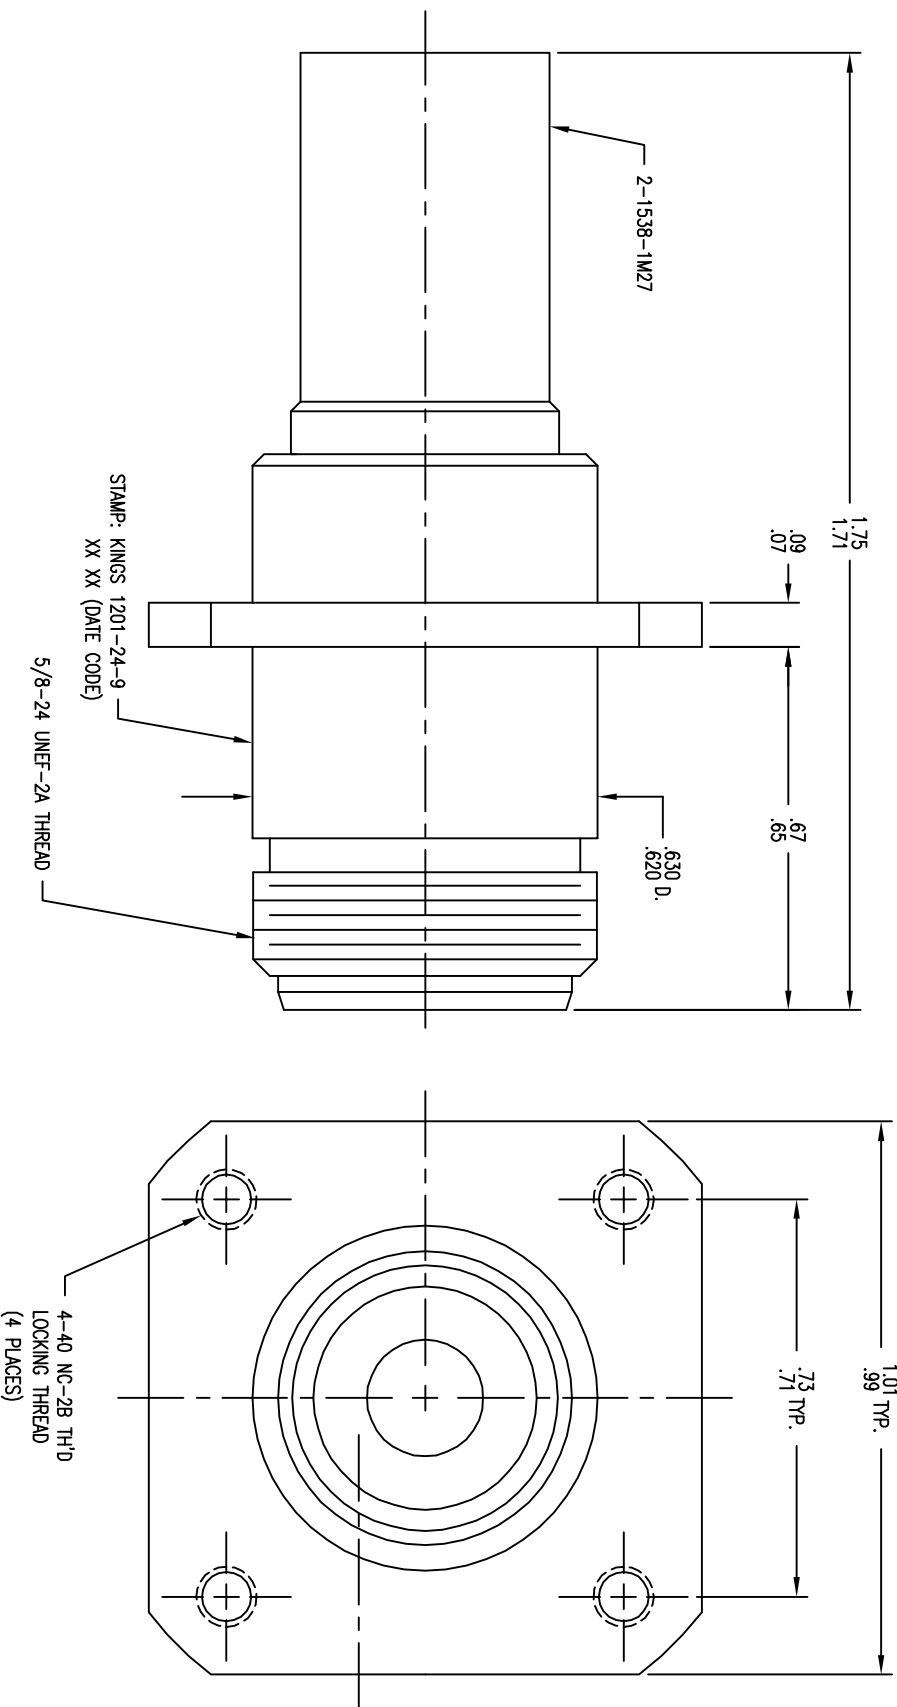

1201-24-9

REVISIONS		
ISSUE	CHANGES	
0	ER 36280	KH 05/04/95
1	CN 36939 A	KH 04/23/96
C	ER 34758	COL 09/06/11

CUSTOMER
SALES DRAWING

THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL REMAIN THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE 4:1

APPROX SURFACE AREA

USED ON

CAGE CODE:91836

JACK, PANEL, N

DRAWN	KH	DATE	04/27/94
DESIGN	JT	DATE	04/28/94
APPR.		DATE	



WINCHESTER

ELECTRONICS

Winchester Electronics

62 Berries Industrial

Road North

Wallingford, CT 06492

B

SIZE

1201-24-9

- NOTES:
1. FOR USE WITH BOEING BMS13-65 UJ & ADAMS RUSSELL FC38Z CABLES.
 2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
 3. FOR CRIMPING USE DIE KTH-2213.
 4. INTERFACE PER MIL-STD-348, FIG. 304-2.
 5. FOR USE WITH .22 MAX. PANEL.
 6. CENTER CONTACT (1-534-85MA9) SUPPLIED UNASSEMBLED.
 7. MARK PACKAGE: KINGS 1201-24-9
XX XX (DATE CODE)
 8. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1710
K-GRIP SLEEVE: COM. BRONZE, ASTM-B135
CENTER CONTACT: BER. COP., ASTM-B196
ALL OTHER PARTS: BRASS, ASTM-B16
 9. FINISHES:
CENTER CONTACTS: .000050 MIN GOLD PER ASTM B488 OVER .000050 MIN NICKEL PER AMS-QQ-N-290(RoHS)
ALL OTHER METAL PARTS: .000050 MIN NICKEL PLATE PER AMS-QQ-N-290 OVER .000050 MIN COPPER PER ASTM B734(RoHS)
 10. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz
 11. WEIGHT: 40.3 GRAMS(0.089 POUNDS)