


# PipeTitan™

## »» Universal Bracketing System

| Specifications  |   |
|---|---|
| Standard Green Bracket (570 series)                     | ABS, U.V. stabilized  |
| Standard Clamp & Strap                                  | Natural high-density polyethylene   |
| Flame Retardant Red Bracket, Clamp & Strap (572 series) | Flame retardant ABS, UL-94 V0   |
| Screws  | Zinc coated steel, 5/16" hex/Phillips head, 2" (strap) and 4" (clamp)   |
| Stainless Steel Bands                                   | 300 series stainless steel: 1/2" wide x .025, 5" band = 4" max diameter, 7" band = 6" max diameter<br>Screw: 410 series stainless, slotted/hex head |

### Safe Working Load

1/2 failure load at 72°F

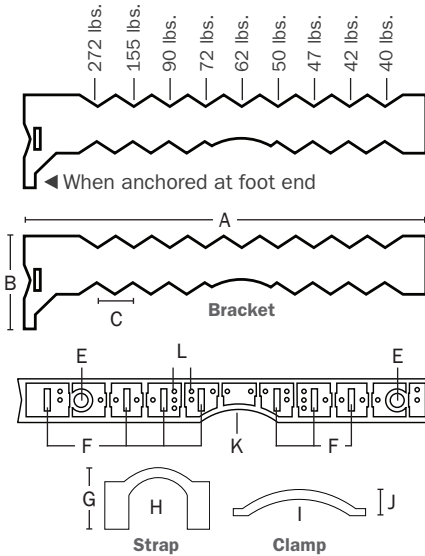

- A - 11"
- B - 2-1/2"
- C - 1" O.C.
- D - 1-1/8"
- E - 13/32"
- F - 9/16"
- G - 1-1/4"
- H - 5/8" O.D. - 1" O.D.
- I - 3/8" O.D. - 3-1/2" O.D.
- J - 7/8"
- K - 1-3/4"
- L - Pilot holes

### Installation Instructions

1. Secure bracket to wall, stud or vent pipe with stainless steel band or clamp. Or, suspend bracket overhead using two 3/8" threaded rods.
2. Insert 2 screws into each strap.
3. Install strap(s) into bracket channel and push down. Tighten screws securely.

⚠ **WARNING:** Cancer and Reproductive Harm  
 ⚠ **ADVERTENCIA:** Cáncer y Daños Reproductivos  
 ⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

#IS-PIPETITAN

Supply

Drainage

Support

Specialties

[www.siouxchief.com](http://www.siouxchief.com)

14940 Thunderbird Road  
 Kansas City, MO 64147  
 P 1.800.821.3944  
 F 1.800.758.5950

