


Submitted Model No.: \_\_\_\_\_  
 Specific Features: \_\_\_\_\_



▲ Designate proper finish suffix

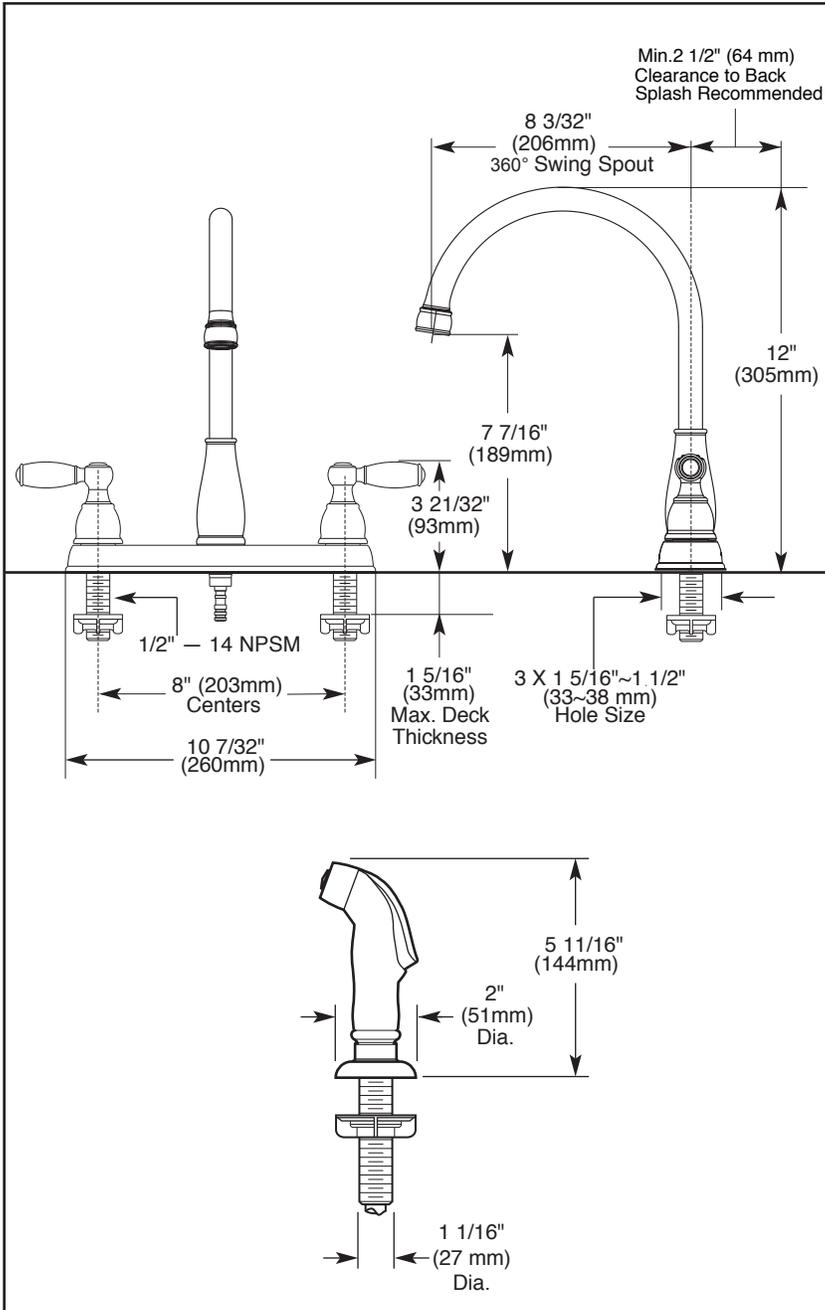

## KITCHEN FAUCET

- Two Handle Deck Mount
- 3 or 4 Hole Sink Application

### STANDARD SPECIFICATIONS

- Maximum flow rate 1.8 gpm @ 60 PSI, 6.8 L/min @ 414 kPa.
- Two handle kitchen faucet for exposed mounting on 3 or 4 hole sinks with 8" centers.
- 8 1/8" (206 mm) long, 12" (305 mm) high spout swings 360°.
- Hot and cold stems are interchangeable.
- Metal lever handle with 1/4 turn handle stops.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and with replaceable non-metallic seats .
- 1/2" -14 NPSM threaded male inlet shanks.
- Model 21988LF with spray attachment has antisiphon device as integral part of valve body.
- Min 2 1/2" (64mm) clearance to back splash recommended.

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280  
 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1  
 © 2016 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-K-21987LF Rev. F