

# JUNO®

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_


Contact/Phone: \_\_\_\_\_

## 5" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

**IC25R**

### PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing  
 • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs  
 • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol  do not require a gasket.

### PRODUCT SPECIFICATIONS

**Lamp** Lamp ratings based on trim selected – see page 2.

**Socket** Medium base porcelain with nickel-plated copper screw shell  
 • Floating socket with spring attaches to trim for installation.

**Trims** Trim selection shown on page 2.

**Labels** UL/cUL listed for through branch-wiring, damp locations and IP • Product thermally protected against improper use of lamps  
 • Union made • UL and cUL Listed • Trim No. 212N is wet location approved for covered ceiling applications • Trims 275S and 276S are wet location approved for covered ceiling applications, **when used with outdoor rated PAR lamps.**

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

### INSTALLATION

**Junction Box** Pre-wired junction box, UL/cUL Listed for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.



**Housing** IC housing, .032" aluminum sealed for Air-Loc Compliance  
 • Remodel springs accommodate up to 1 ½" ceiling thickness.

### PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC25R 5" Incandescent Remodel Shallow IC Housing	120V	R20/PAR20/BR30/PAR30/PAR30L (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.

### DIMENSIONS

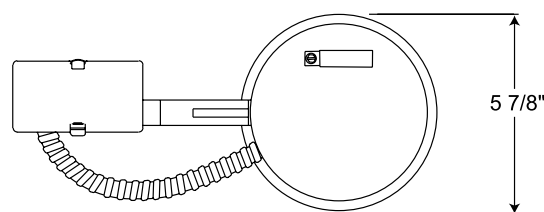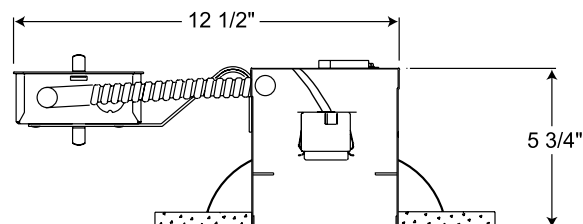

5 1/2" CEILING CUTOUT

#### Accessories

Catalog Number	Description
ALG5R	Air-Loc Gasket








To order, specify catalog number.

# 5" SHALLOW UNIVERSAL IC REMODEL HOUSING

## INCANDESCENT LAMPS

### IC25R


#### TRIMS/LAMPS

	Catalog Number	Description	Max. Lamp Rating
	 <b>275S BWH</b> ◆◆ <b>275S WWH</b> ◆◆	Shallow Black Baffle, White Trim Ring Shallow White Baffle, White Trim Ring	50W BR30, 50W PAR30, 50W PAR30L
	 <b>688 BWH</b>  <b>688 WWH</b>	Gimbal Ring, Black Baffle, White Trim Ring Gimbal Ring, White Baffle, White Trim Ring	35W PAR30, 35W PAR30L
	 <b>689 CWH</b>	Gimbal Ring, Clear Alzak® Cone, White Trim Ring	35W PAR30, 35W PAR30L
	 <b>212N WH</b> ◆	Frosted Lens with Clear Center Trim, White	35W PAR30

Trim Size: 6¼" O.D.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present,  
Type IC fixtures must be used.

 JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

- ◆ UL Listed for use in wet location.
- ◆◆ UL Listed for use in wet location with outdoor rated lamp.

Housing and trim can be ordered together or separate, but will always ship separately.