

ASSEMBLY&INSTALLATION

Please read carefully and save these instructions,as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Hanging metal ring (20) to the pin of the fixture (4), Aligning the hole of the metal ring (20) to the hole of the fixture (4), then through screw (21) into hole of the fixture (4) and metal ring (20), securing with **finials (22)**.
3. Unscrew the socket ring (6) from socket of the fixture (4). Set glass shade (5) over socket and **adjust glass skade in the middle of fixture (4) and secure with socket ring (6)**. Do not overtighten.
4. Attach mounting strip (1) to outlet box (2) using two outlet box screws (3).
5. Unscrew the collar loop ring (9) from collar loop (10). If necessary, use pliers (not included) to spread links of chain (11) apart and remove any links to achieve desired hanging height. Once chain (11) is at desired length, unscrew the quick link (12) on chain (11), but do not remove. Thread collar loop ring (9) and canopy (13) down chain (11), then attach the top quick link(12) to the screw collar loop (10) and the bottom quick link (12) to the loop (8).
6. Weave electrical wires and ground wire up through the chain (11), the collar loop ring (9), the canopy (13) and the nipple (14) preassembled on mounting strip (1), then into outlet box (2).
7. Tie the ground wires (15) from fixture and from outlet box to the ground screw on the mounting strip. Connect the wire (16) without writing on it (with raised ribs) from the fixture to the white wire (neutral wire 17) from the supply circuit. Connect the wire (18) with writing on it from the fixture to the black wire (live wire 19) from the supply circuit.
8. Cover the connections by using provided wire connectors (7). Position wires back inside outlet box (2).
9. Install the bulbs (not included). Make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.
10. Place the canopy (13) over the nipple (14) and tighten the collar loop ring (9) onto the collar loop (10) until the canopy (13) is held firmly against the ceiling.
11. Turn on the power.

INSTALLATION IS NOW COMPLETED

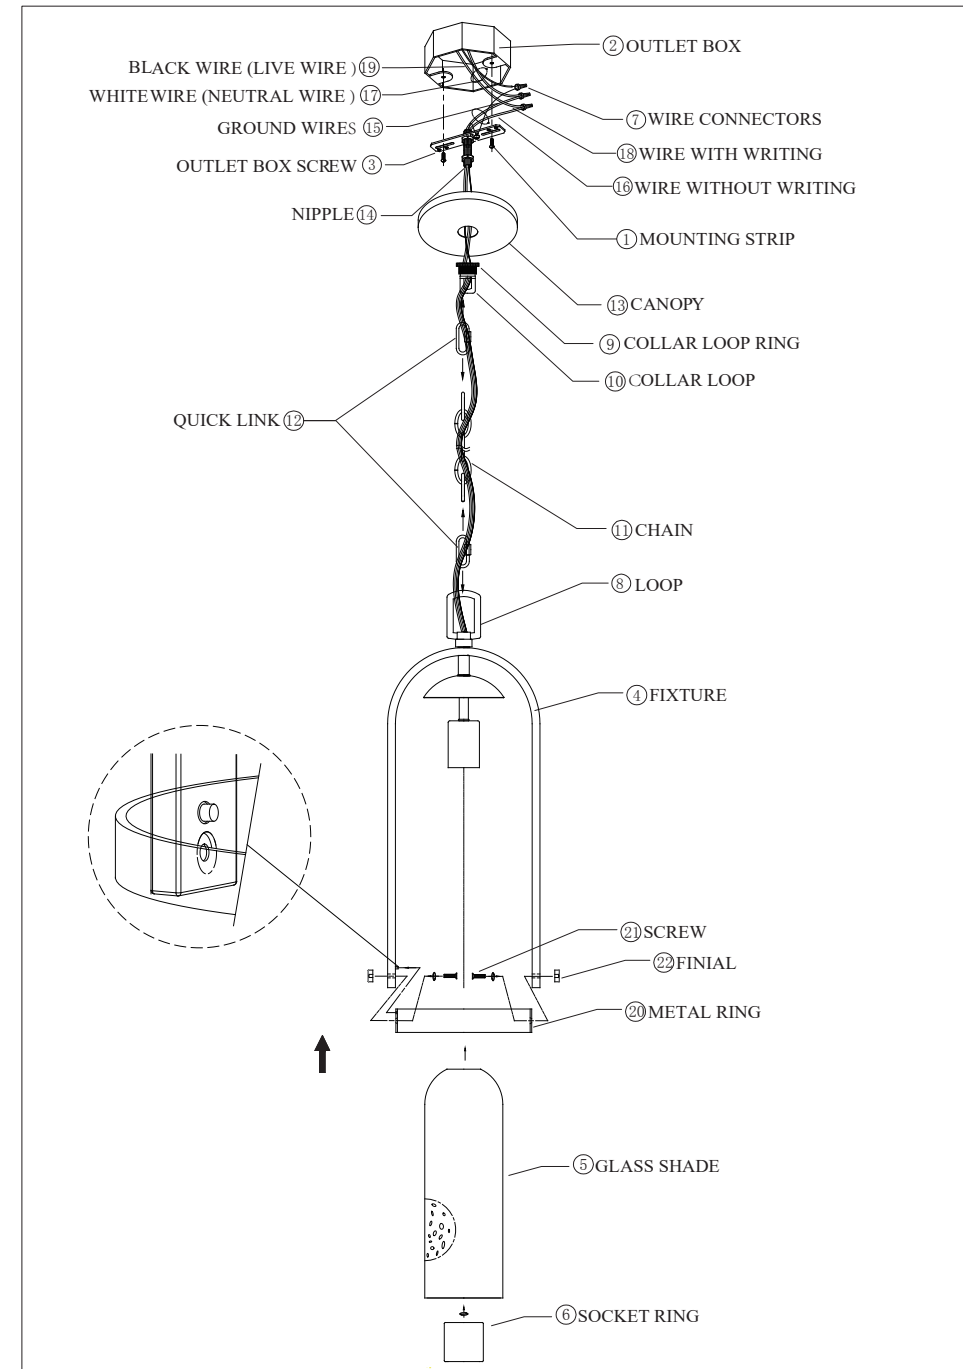

ITEM NO.: 199801