



INSTALLATION INSTRUCTIONS


Finale

Kitchen Faucet

Single Control with Pull Down Spray

85926 Polished Chrome

85927 Brushed Nickel

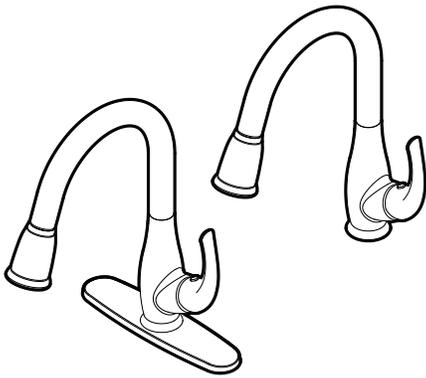

SPECIFICATIONS

- 35mm Ceramic Disc with Hot Temperature Limit Adjustment Ring.
- Brass Body with Copper Supplies
- Stainless Steel Spout
- Brass Supply Connection Adapters with 1/2" IPS Threads.
- Single Control Lever Handle.
- Requires less than 5 lb force to operate Handle.
- Temperature Adjustment 90° Full Cold to Full Hot.
- 1.8 GPM (6.8 L/min) Aerator.
- 2 Function Pull Down Spray Wand.
- Check Valve in Spray Wand.

3 HOLE INSTALLATION

- 1 Assemble Deck Plate and Gasket to Faucet
- 2 Position Faucet on sink
- 3 From underside of sink, assemble Spacer, Rubber Washer, Metal Washer and Mounting Nut, then tighten the 3 Phillips Head Screws to secure into position.

4 Assemble Braided Spray Hose to the Hose Quick Connect Fitting.

CAUTION: Make sure the Braided Spray Hose is properly engaged and secure into the Hose Quick Connect Fitting.


5 Assemble Hose Weight to the Braided Spray Hose.

6 Assemble Water Supply Lines to Faucet.

CAUTION: Use Wrench or Pliers to hold Faucet Inlet Adapters when tightening Water Supply Line Nuts to prevent twisting Copper Tubing or damaging Solder Joints.

7 Remove Spray Wand from Faucet and flush water through Faucet to remove any debris within the system.

8 Assemble Spray Wand to Faucet and run water through Faucet while inspecting all connections for possible leaks.

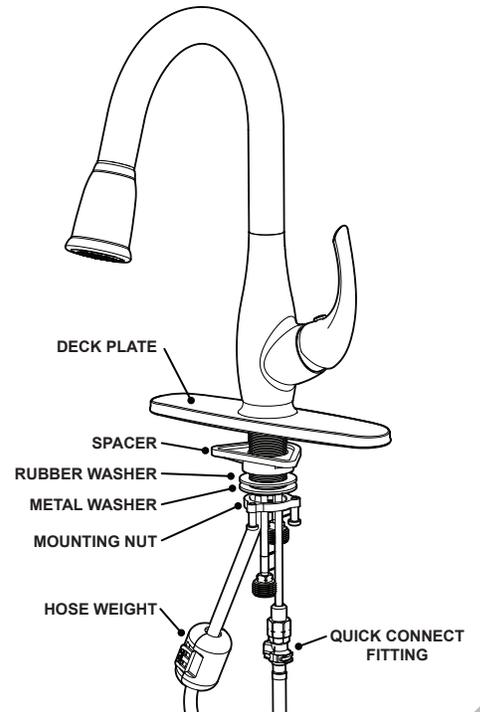

SINGLE HOLE INSTALLATION

- 1 Position Faucet on sink
- 2 From underside of sink, assemble Spacer, Rubber Washer, Metal Washer and Mounting Nut, then tighten the 3 Phillips Head Screws to secure into position.
- 3 Assemble Braided Spray Hose to the Hose Quick Connect Fitting.

CAUTION: Make sure the Braided Spray Hose is properly engaged and secure into the Hose Quick Connect Fitting.


4 Assemble Hose Weight to the Braided Spray Hose.

5 Assemble Water Supply Lines to Faucet.

CAUTION: Use Wrench or Pliers to hold Faucet Inlet Adapters when tightening Water Supply Line Nuts to prevent twisting Copper Tubing or damaging Solder Joints.


6 Remove Spray Wand from Faucet and flush water through Faucet to remove any debris within the system.

7 Assemble Spray Wand to Faucet and run water through Faucet while inspecting all connections for possible leaks.

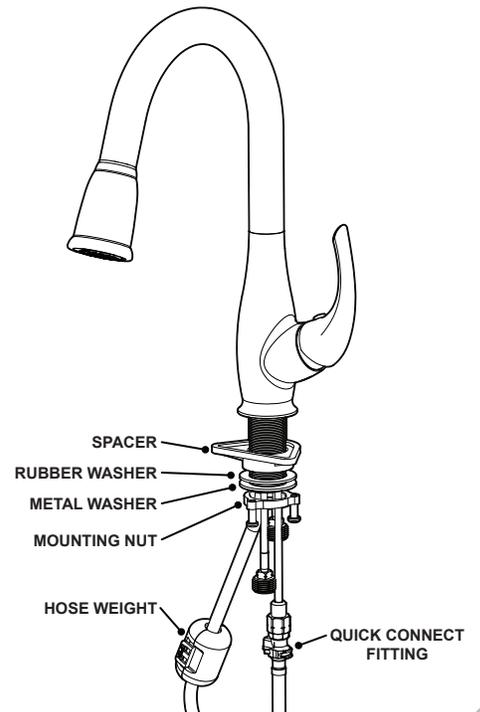

85926 / 85927 REPAIR PARTS

ITEM NO.	PART NO.	DESCRIPTION
1	85183W	LEVER HANDLE - PC
	8518304	LEVER HANDLE - BN
2	85101	HANDLE SET SCREW
3	85102	INDEX BUTTON
4	85107W	CARTRIDGE ASSEMBLY
5	85188W	SPRAY HEAD - PC
	8518804	SPRAY HEAD - BN
6	85336	HOSE
7	85339	QUICK CONNECT ADAPTER
8	85187	DECK PLATE - PC
	8518704	DECK PLATE - BN
9	85341	BUSHING - PULL DOWN SPRAY
10	85340	HOSE WEIGHT

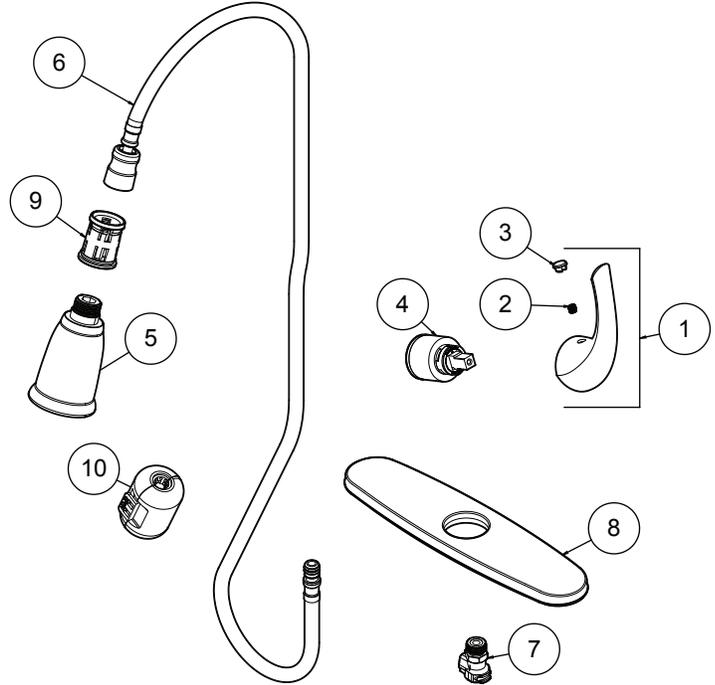
85926 / 85927 ROUGH IN DIAGRAM
COMPLIANCE

ASME A112.18.1 / CSA B125.1
 cUPC certified
 NSF 61/372
 ADA compliant ♿

CONNECTIONS

1/2" IPS Inlets

FLOW


1.8 GPM (6.8 L/min)

MOUNTING SURFACE

1-3/4" Max Deck Thickness

Ø1-3/8" Min to Ø1-5/8" Max Hole Size

Body Flange Diameter Measures 2-3/16" for Single Hole Mount Applications.

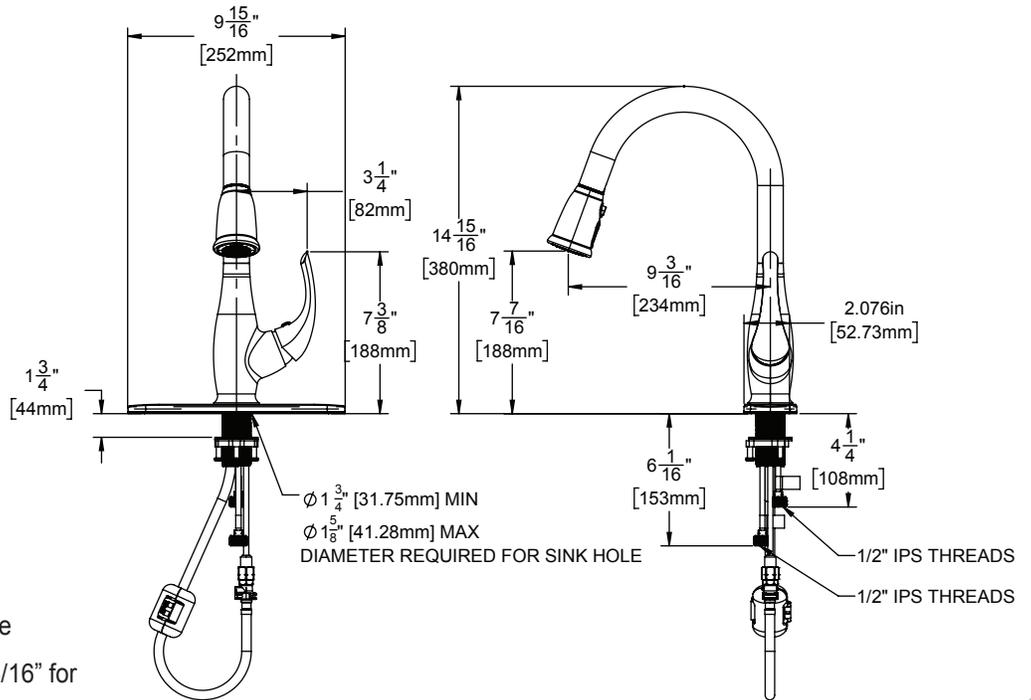



WOLVERINEBRASS®

PRODUCT WARRANTY

With the exception of items listed below, this product has a limited warranty against defects in materials or workmanship for a period of one year from the date of installation.

Exceptions:

- 1.) Faucet stem cartridges have a limited warranty for a period of 100 years from date of manufacture.
- 2.) Product finishes have a limited warranty for a period of 100 years from the date of installation excluding oil rubbed bronze finishes. Failure to follow the cleaning instructions listed below voids all finish warranty. Damage due to accidents or installation is not warranted. This warranty covers replacement of cartridges and finish only and does not include labor charges and/or damage incurred in installation. Finish warranty is not covered if finish is exposed to extreme use of cleaners containing abrasives, alcohol, extreme cleaning, or chemical use, or damage due to abuse or neglect. **Please see cleaning instructions provided with each faucet. This warranty excludes all industrial, commercial, and business usage of faucets and only pertains to residential use. Faucets used for other than residential use are covered by a 1-year limited warranty from the date of purchase.

CLEANING INSTRUCTIONS

USE ONLY A CLEAN, SOFT CLOTH, WATER, AND MILD HAND SOAP TO CLEAN UNIT.

WARNING

Do not use abrasive cleaners, chemicals or abrasive cleaning pads to clean fixture. A very hard protective coating has been applied to this product to maintain its appearance, but this product could be damaged with improper cleaning.

CALIFORNIA PROPOSITION 65



CALIFORNIA PROPOSITION 65:

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Wash hands after installation, repair, or removal of this product.

NEED HELP?

For additional assistance or service please contact:



800-944-9292



www.wolverinebrass.com