




P6-RPSRC
6 [152] WIDE GRATE

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

Please Check ✓	Item No.	Part Number	Item I.D.
	50	308341	P6-RPSRC

[Back to Index](#)

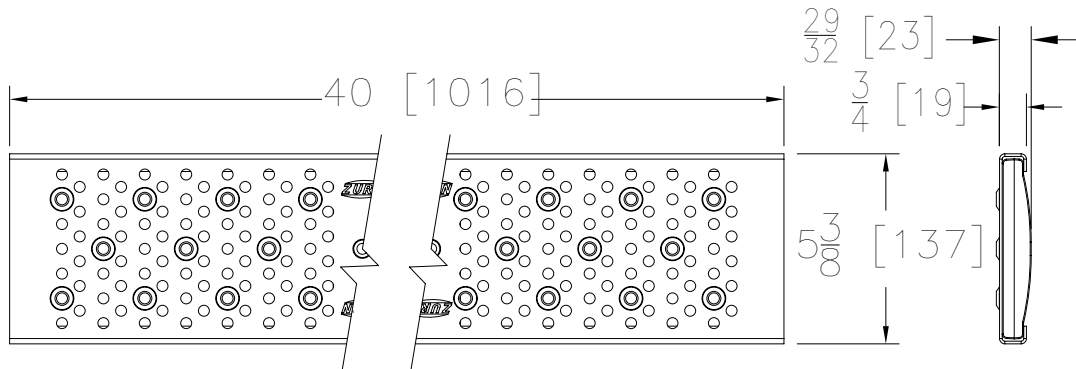

RPSRC GRATE ENGINEERING SPECIFICATION: ZURN P6-RPSRC

40" [1016mm] X 5-3/8" [137mm] Stainless steel reinforced perforated grate weighing 5.1 lbs per linear foot [7.5kg/m]. The grate has an open area of 8.3 in² per linear foot [175cm²/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA Compliant, H-20 load rated. Stainless steel grate conforms to ASTM A351 Grade CF8 Type 304 (Grade CF8M, Type 316 by request) for cast reinforcement and A-240 TYPE 304 for grate skin.

RPSRC - Reinforced Perforated Reverse Punch	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	5.1 lbs/ft. [7.5kg/m]
Open Area:	8.3 in ² /ft. [175cm ² /m]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	No

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo - www.P65Warnings.ca.gov

⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov