

OVERVIEW

The SilverBullet is a "sub-branch circuit current limiter" for track lighting that enforces a definite current limit to lower the VA rating of each track lighting circuit and meet code requirements.

FEATURES

- Current limiting for up to 21 circuits
- Current limiting breakers available from 1A-8A, 10A, 13A, and 15A
- Compact sizes 12" W X 18"H X 4"D or 12" W X 12" H X 4" D
- AIC rating of 10,000A @ 120 V
- Factory pre-assembled with each load factory labeled on the door sheet

SPECIFICATIONS

Enclosure dimensions: **1-12 breakers**
 12" w x 12" h x 4" d
6-21 breakers
 12" w x 18" h x 4" d

Enclosure type: Surface mount, hinged locking door, NEMA 1
 Optional enclosures: Flush mount
 Max. humidity: 10–90% non-condensing
 Ambient temperature: 32–104° F (0–40° C)
(Note: Thermal magnetic breakers. De-rate to 80% of load for temperatures over 70° F)

Listings: UL listed UL 508, breakers UL 489 Type

Warranty

Three-year limited warranty. Complete warranty terms located at:
www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


Note: Actual performance may differ as a result of end-user environment and application.
 Specifications subject to change without notice.

ORDERING INFORMATION


SILVERBULLET				EXAMPLE: T24 489UL 12BP 10A3 15A9 SM			
System	Breaker UL Listing	Breaker Positions	Breaker			Enclosure Mountings	
T24 Standard (21 breakers max.)	489UL Standard	[qty]BP # of positions	1A[qty] 1 amp breaker			SM Surface Mount	
T24M Mini (12 breakers max.)	1077UL Only for City of Los Angeles	Where [qty] is, replace with the total number of breakers needed in a panel, within a range depending upon the specified panel: T24 is from six and 21 breakers, T24M is from one to 12.	2A[qty] 2 amp breaker	Where [qty] is, replace with the quantity of breakers of that amperage. Total quantity of breaker spaces specified must fall within the number specified under Panel Size. 3A2 is two 3 amp breakers, 10A10 is ten 10 amp breakers.		FM Flush Mount	
			3A[qty] 3 amp breaker				
			4A[qty] 4 amp breaker				
			5A[qty] 5 amp breaker				
			6A[qty] 6 amp breaker				
			7A[qty] 7 amp breaker				
			8A[qty] 8 amp breaker				
			10A[qty] 10 amp breaker				
			13A[qty] 13 amp breaker				
			15A[qty] 15 amp breaker				



OVERVIEW

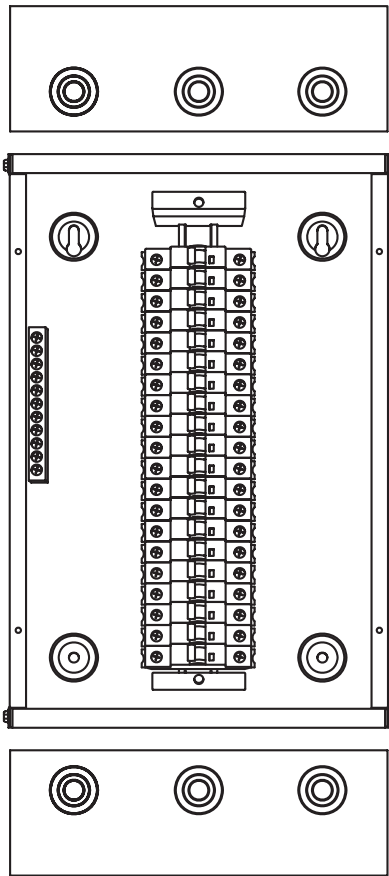


SUPPLEMENTAL CURRENT LIMITING PANEL
NEMA 1 ENCLOSURE WITH HINGED LOCKING DOOR
UP TO 21 CURRENT LIMITERS: 12"W X 18"H X 6"D

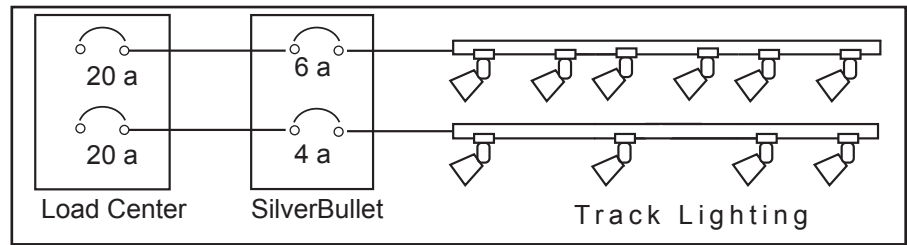

More Track-Less Penalty

The SilverBullet is UL listed to be placed in-line between the branch circuit breaker and the track mounted lighting loads.

When doing energy calculations, use the ampere rating of the supplementary breaker in the SilverBullet as opposed to the linear footage of the rack.

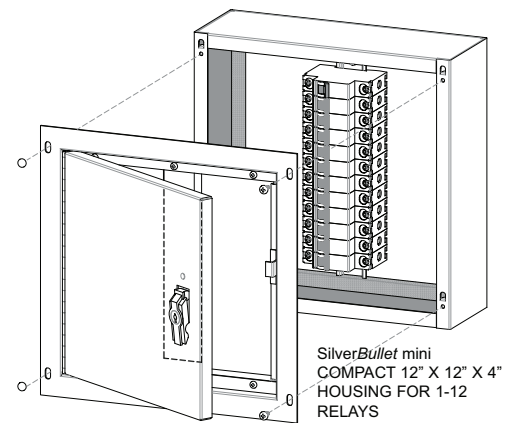

SilverBullet mini
COMPACT 12" X 12" X 4"
HOUSING FOR 1-12
RELAYS

Title 24 System Component