


Wall-Hung Carrier System

INSTALLATION INSTRUCTIONS



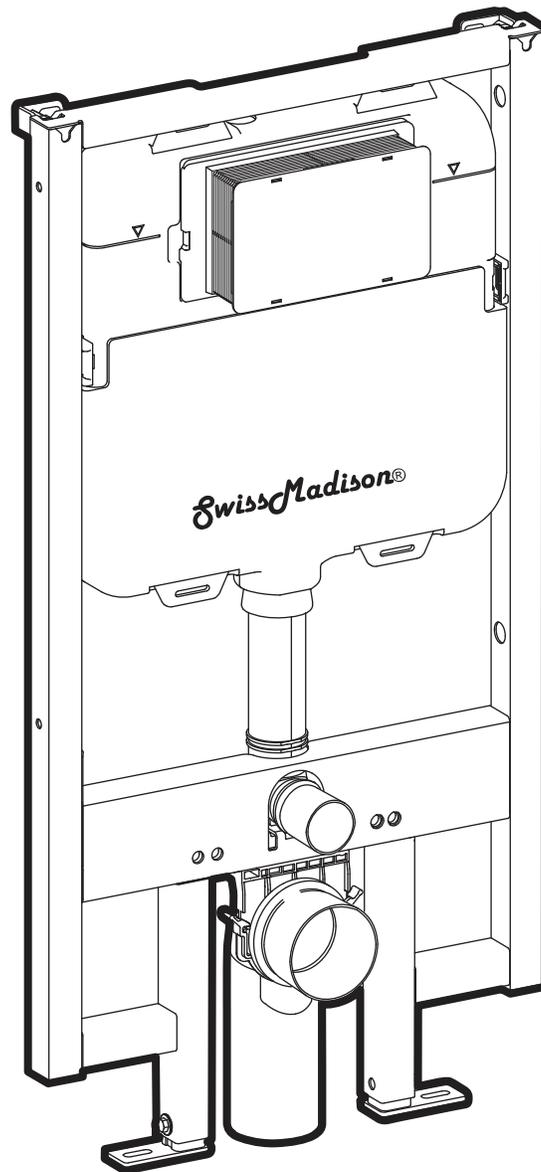

PRIOR TO INSTALLATION:

- Inspect product to ensure no damages have occurred while in shipping.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- All dimensions are nominal! Be sure to measure your toilet prior to installation.
- The step-by-step guidelines in the installation instructions are a general reference. Should there be any discrepancies, Swiss Madison cannot be held liable. It is recommended to install all Swiss Madison products by hiring a licensed professional.
- Read installation and maintenance instructions thoroughly before installing. Be sure to use proper tools and always wear proper personal safety accessories for your protection.
- Be sure to properly bleed all air from the piping system, trapped air can cause damage to the flushing system and toilet bowl.
- Avoid outside wall installations to avoid possible freezing

QUESTIONS OR CONCERNS?

Please contact us:

1-434-623-4766

info@swissmadison.com

SUGGESTED TOOLS & MATERIALS:




Safety Glasses




Plumbers Grease



Wrench




Hacksaw



Level




Flat File



Tape Measure



Drill




Plumbers Tape




Scissors




Coupler
not included

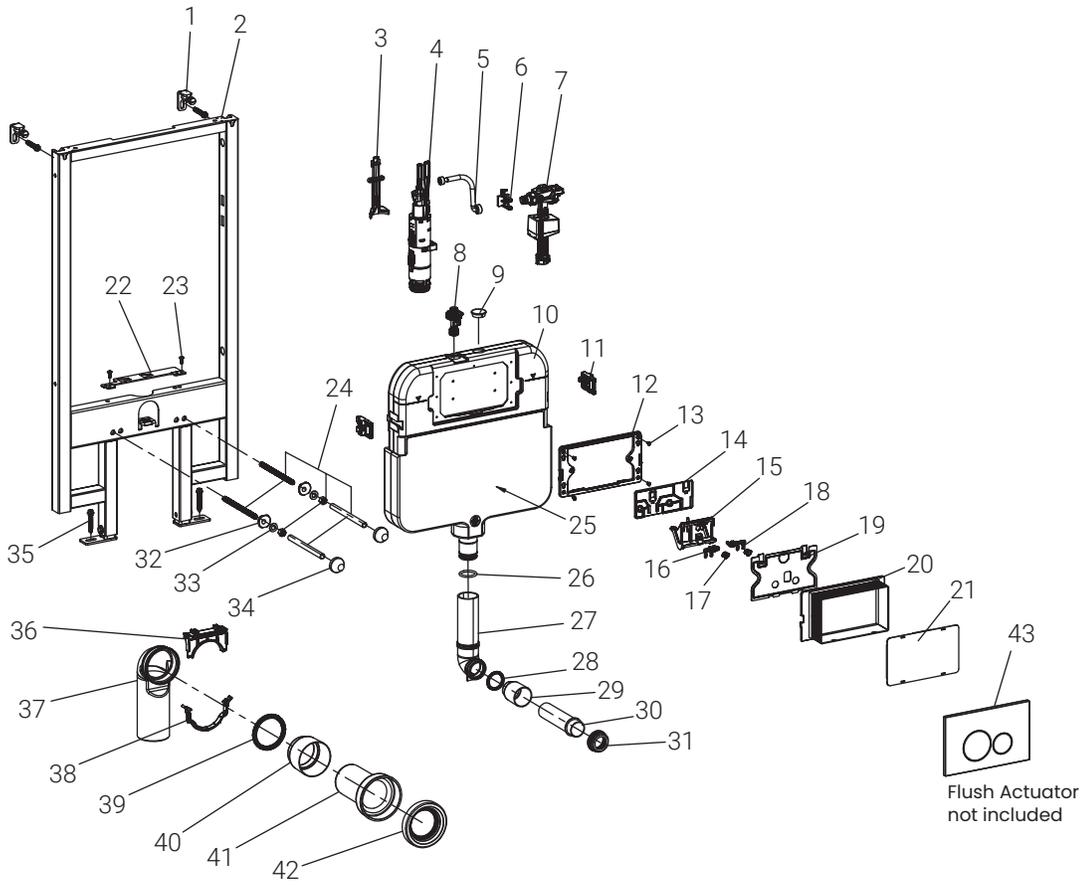


1

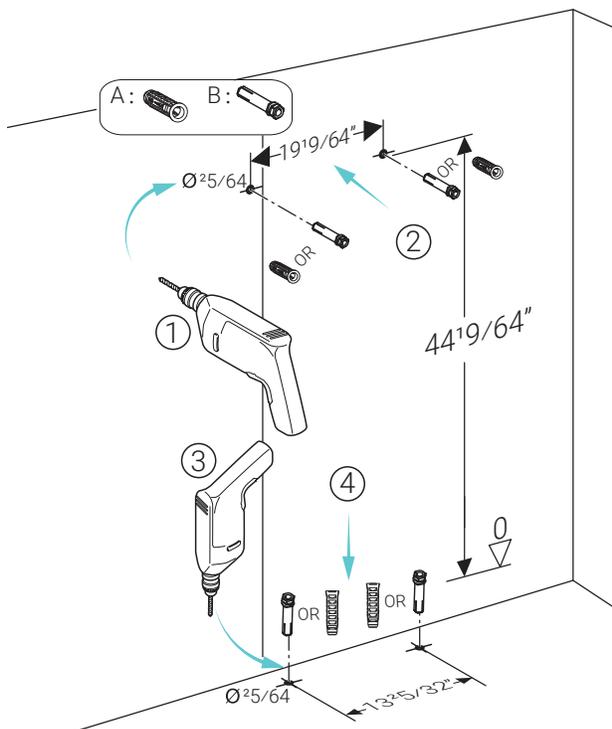


- 2**
- Before fastening sides, you must first attach legs to framing. At this point it is possible to readjust your bowl rim to your desired height.
 - L-shaped mounting brackets are for masonry applications.
 - Fasten your frame into studs/framing using four mounting holes in the carrier frame (two on each side). It is recommended for framing installations to use 2 1/2" screws and 1 1/4" fender washers (needing four of each total).
 - Be sure to screw carrier to wood framing flush across the front.

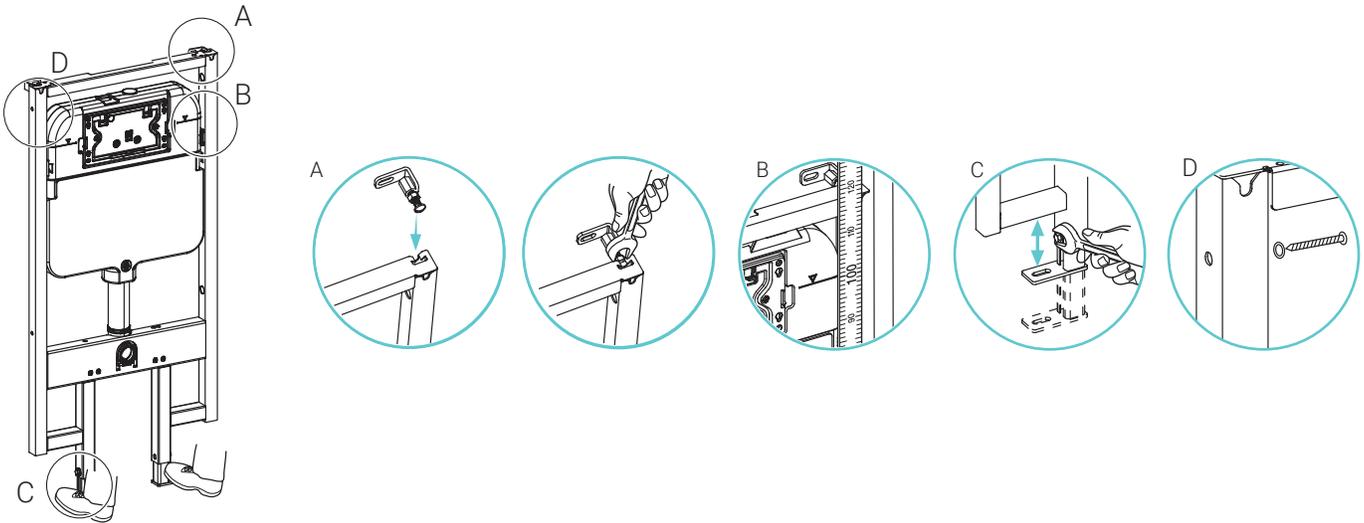



3

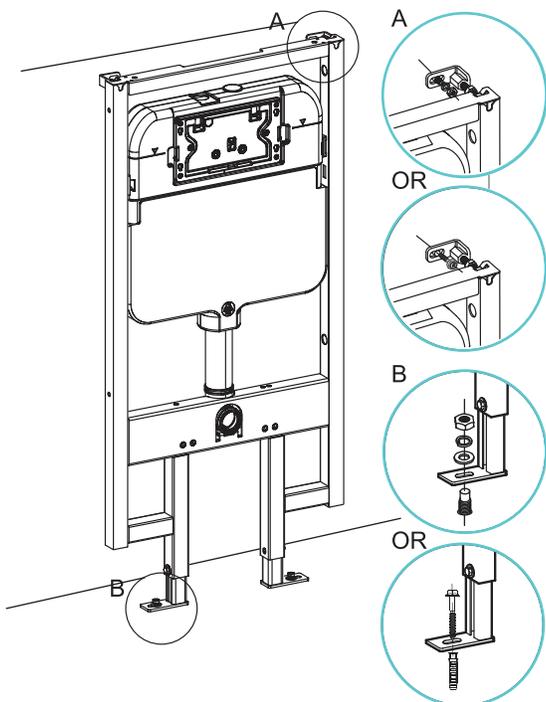

4

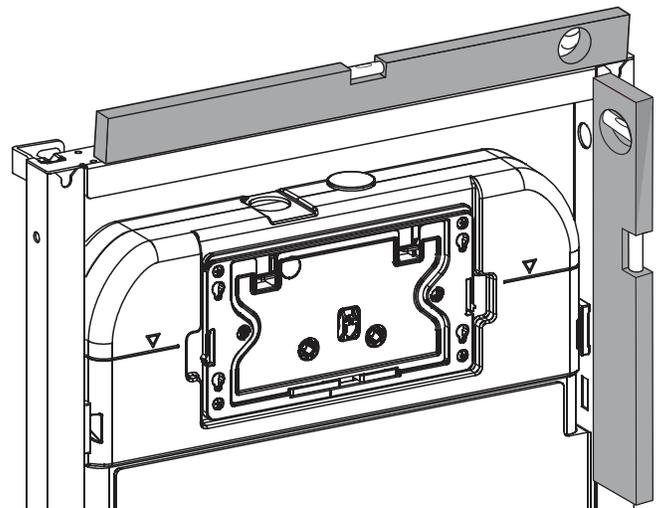


5

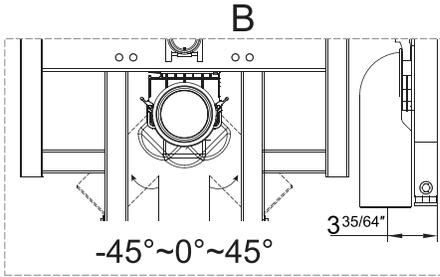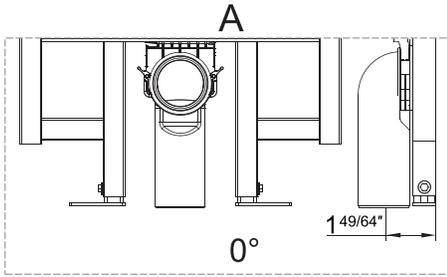


· When connecting to a 3" sewer line it is advised to drill a 3 5/8 hole before connecting the discharge pipe to the frame.

· It is possible to offset the discharge pipe left or right. If offsetting is required, you must move the top bracket holding the discharge pipe to the back holes in the frame. This allows you to miss the carrier frame when connecting the necessary plumbing.

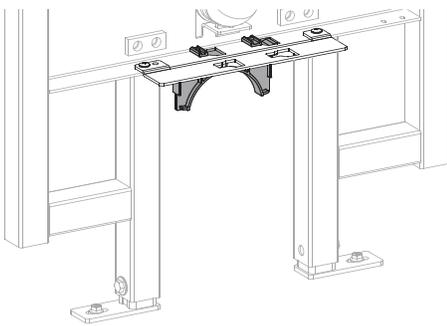


· For a vertical discharge, leave bracket as shown above.

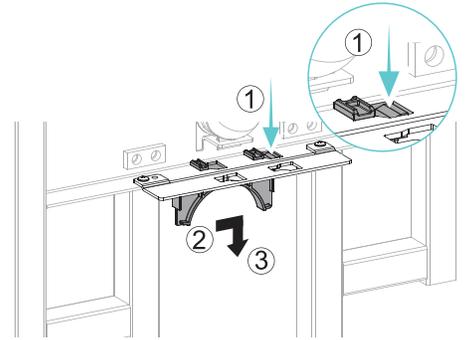

· Use this mounting position for an offset installation.


6

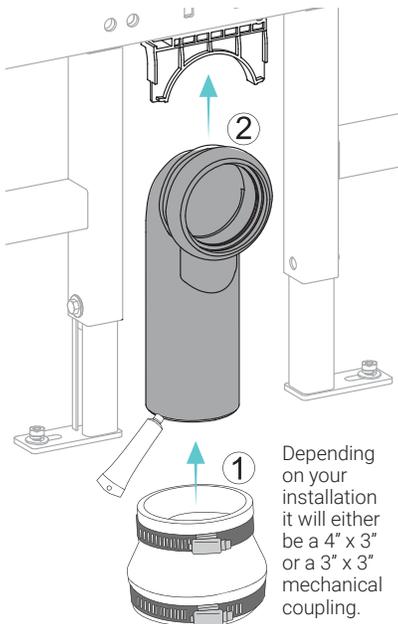


Depending on your installation it will either be a 4" x 3" or a 3" x 3" mechanical coupling.

*coupler not included, please consult your local plumber.

7

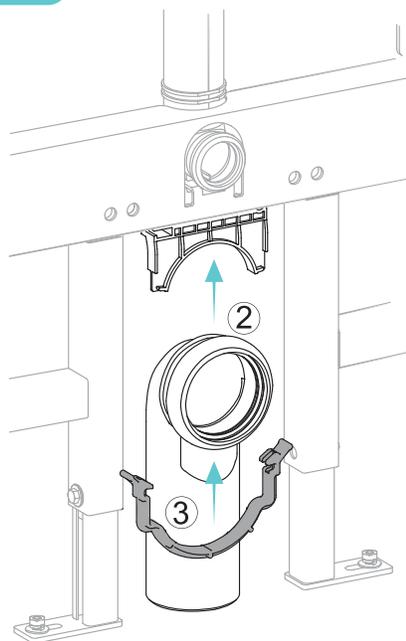


8

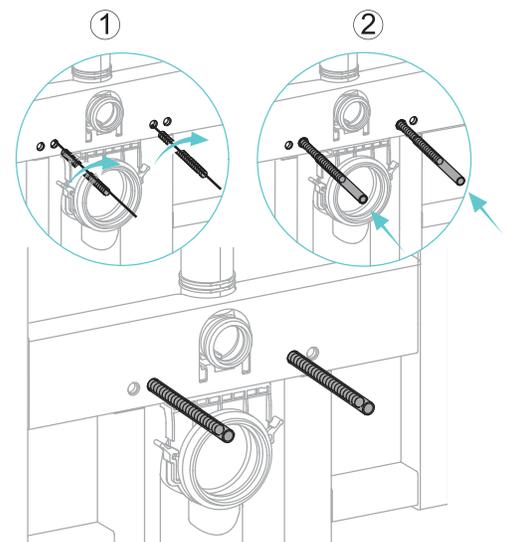


· Cover installation bolts with protective slip, do not remove slip until after toilet is in place. It is important to keep threads clean for later adjustment.

9

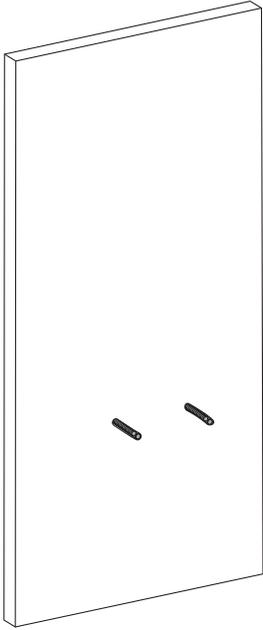

· Install dry wall over carrier system in intended location.


10

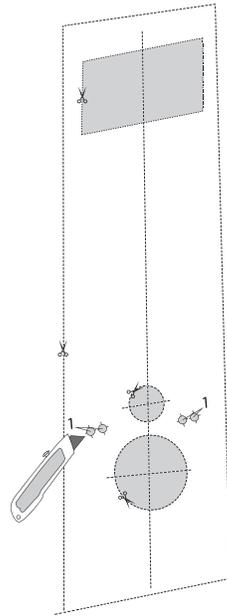

· Find cutout template that was included with your carrier.
· Cut out the small marked holes (1) to align cutout with the threaded bolts.


11

· Ensure template is plumb.

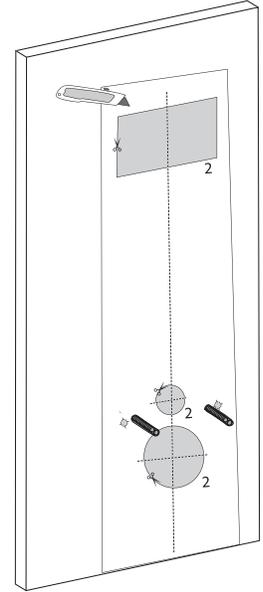

· Align template up on your wall so the threaded bolts fit through the precut holes.
· Cut around the marked lines (2) to reveal pipe/actuator locations behind the drywall.


12

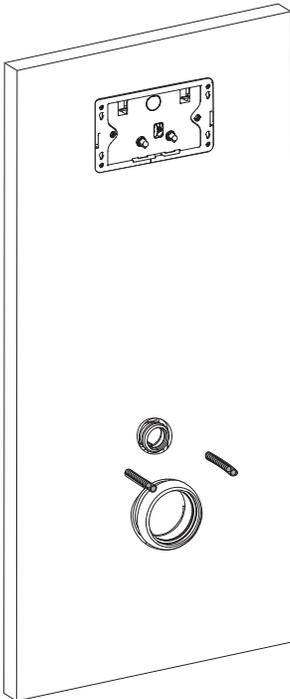

Cut drywall to reveal where to install flush plate and attach plumbing.


NOTE Swiss Madison is not responsible for any damage done to wall or carrier system.

13

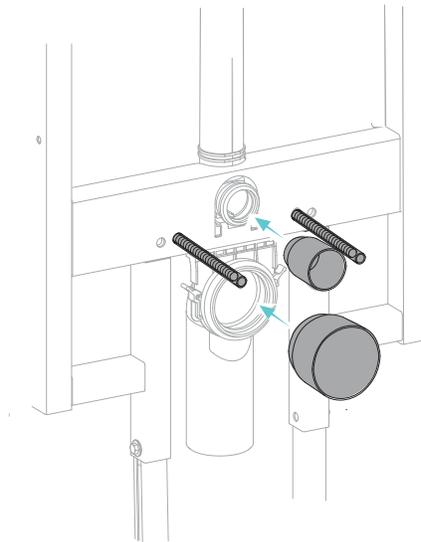


Install mud guards into proper holes to ensure no debris enters pipes after sheetrock has been cut.


14

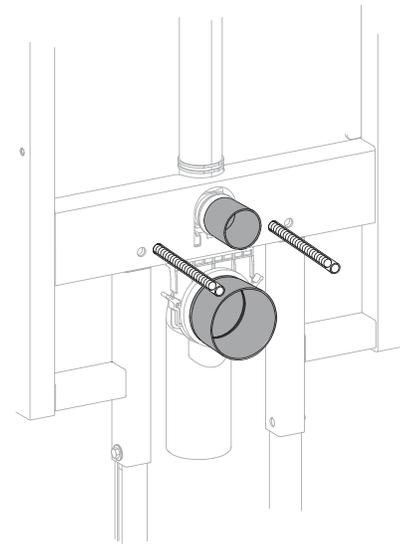


15

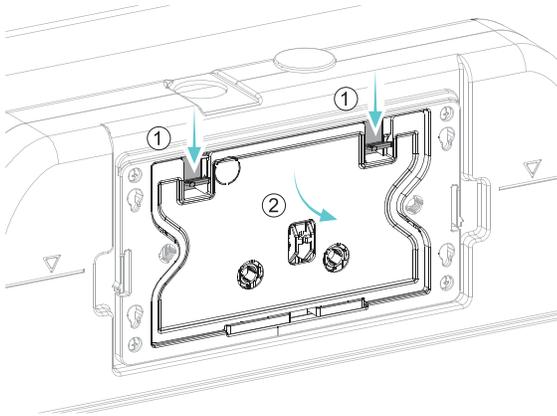

16

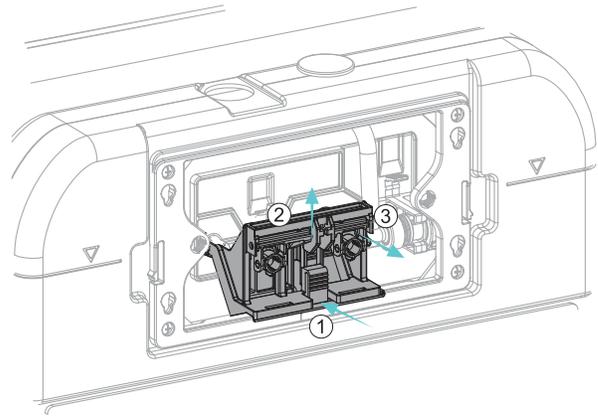


17

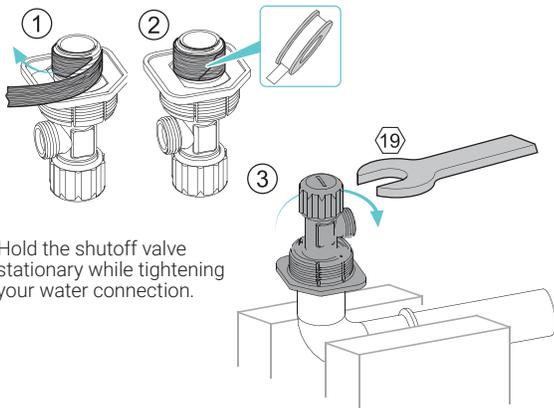


Hold the shutoff valve stationary while tightening your water connection.

18

Install the locknut as shown.

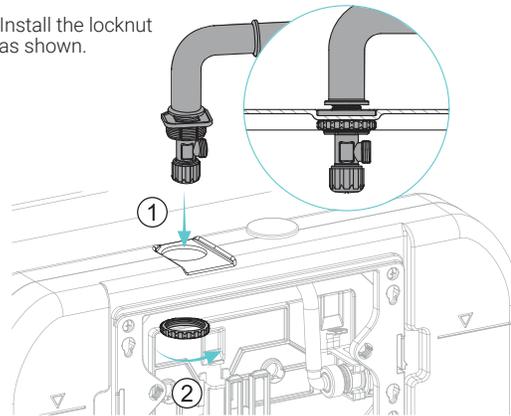


19

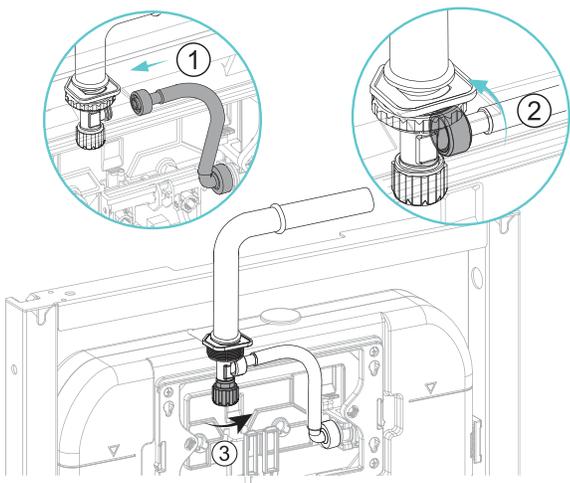


20


Once the water connection is made to the water shutoff valve, undo the other side of the hose. Next, turn valve on to flush out any debris before reinstalling to the actuator.

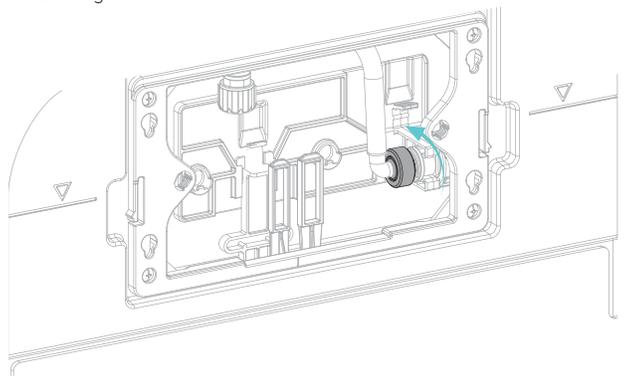


21

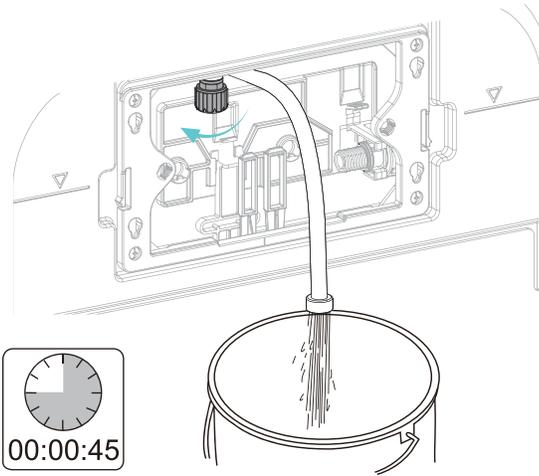


22

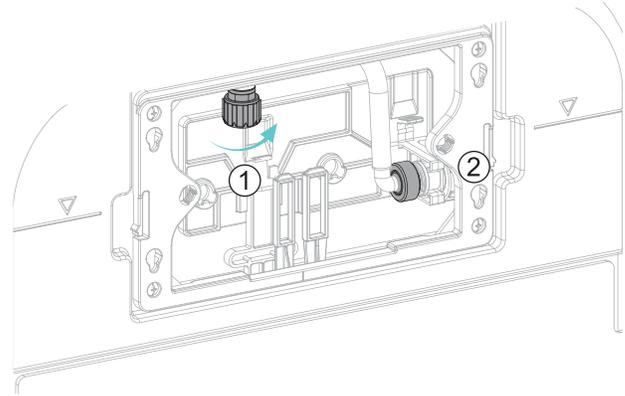


23

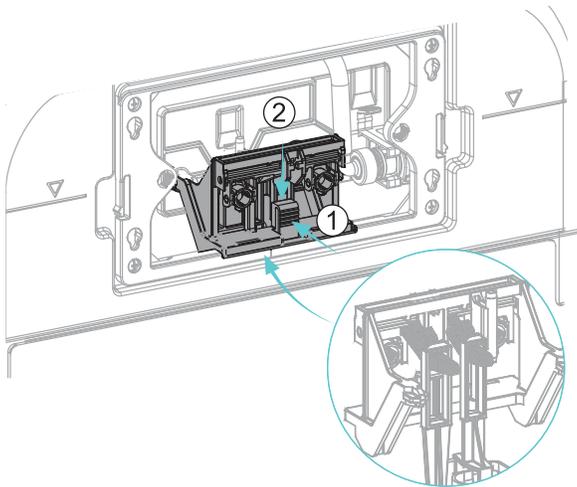


24

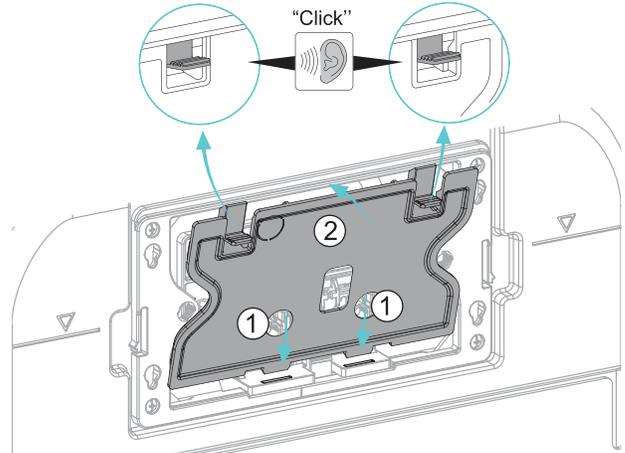

25

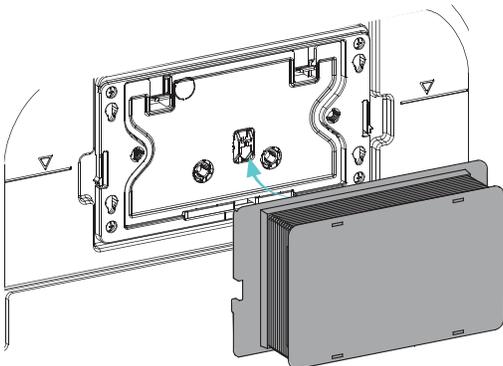


26

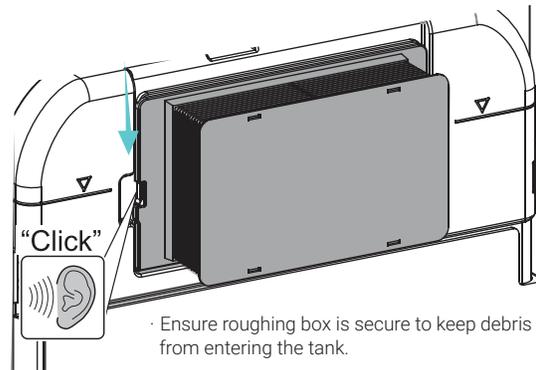

Wall-Hung Toilet

INSTALLATION INSTRUCTIONS

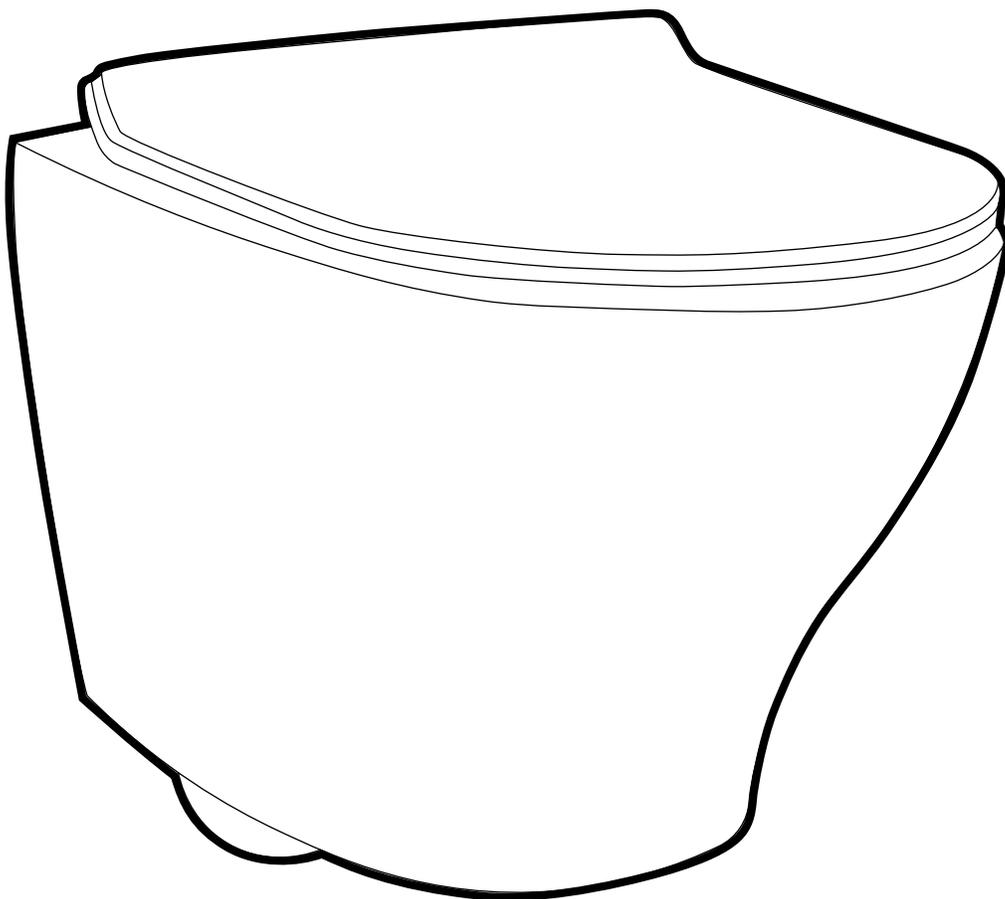



PRIOR TO INSTALLATION:

- Inspect product to ensure no damages have occurred while in shipping.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- All dimensions are nominal! Be sure to measure your toilet prior to installation.
- The step-by-step guidelines in the installation instructions are a general reference. Should there be any discrepancies, Swiss Madison cannot be held liable. It is recommended to install all Swiss Madison products by hiring a licensed professional.
- Read installation and maintenance instructions thoroughly before installing. Be sure to use proper tools and always wear proper personal safety accessories for your protection.
- Two people are recommended to handle and install this product as it is fragile.

QUESTIONS OR CONCERNS?

Please contact us:

1-434-623-4766

info@swissmadison.com

REQUIRED PARTS:



Wall-Hung Toilet




Outlet Pipe & Inlet Pipe
(Included with tank carrier system - sold separately)




Notched Pegs



Set Screws



Retaining Bolts



Set Screw Installation Tubes



Allen Wrench



Retaining Bolt Key

SUGGESTED TOOLS & MATERIALS:




Safety Glasses




Putty Knife



Wrench




Tape Measure



Level



Flexible Supply Tube



Hacksaw




Screwdriver

1 Install Tank Carrier System

- Before toilet bowl installation, a wood frame and commercial or residential tank system is required.
- Install according to manufacturer's instructions.

2 Dry Fit Outlet Pipe and Inlet Pipe

- Fully insert straight tube into cistern flushing outlet then connect pipe into discharge outlet.
- Draw lines to mark the finished wall location on each pipe as pictured below.


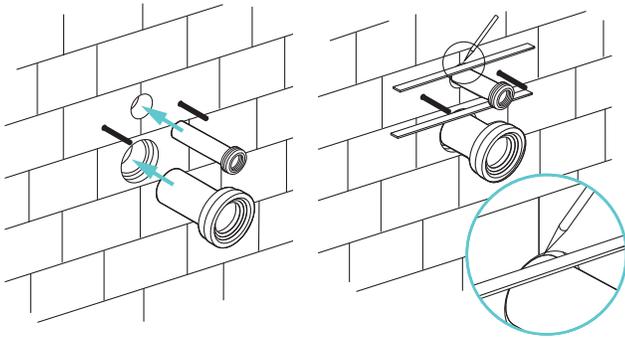


4 Cut Pipes

- Measure the distance between both marked lines on pipe. Take measured distance, deduct from bald end of pipe and cut pipes as shown.
- After cutting, take a file and remove all burrs. Try and bevel pipe edge.


L1: The distance between the two lines on the straight tube.

L2: The distance between the two lines on the connecting pipe.

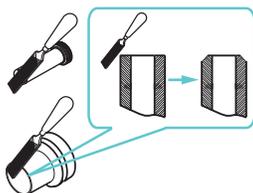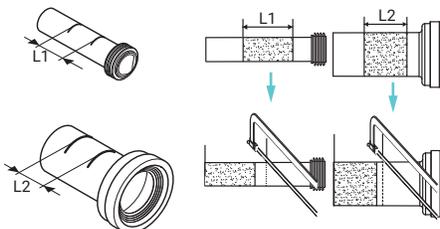


3 Determine Pipe Size

- Apply lubricant on rubber washers of straight tube and connecting pipe, then insert into holes.
- Draw lines on pipes as pictured below.

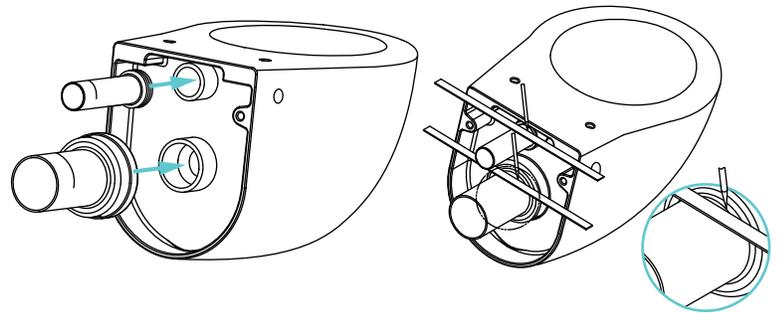



5 Adjust Connecting Bolt Length

- Measure and adjust the length of the connecting bolt to be $d + \frac{13}{16}$ ".

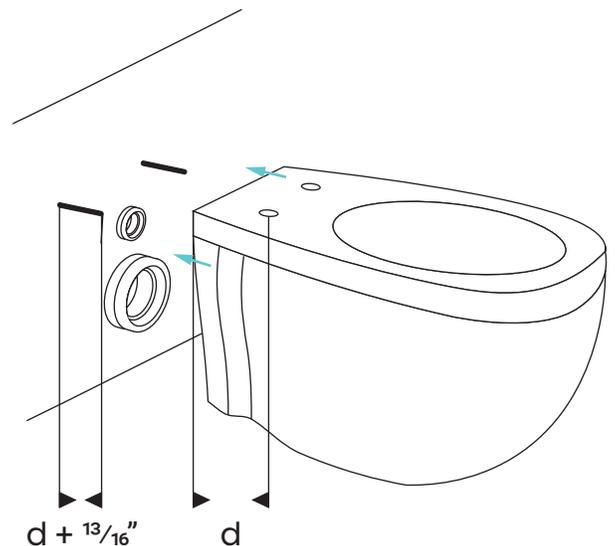


6 Anchor Bowl

- Hand tighten the notched pegs (B) onto the mounting bolt, be sure the notch is facing up.

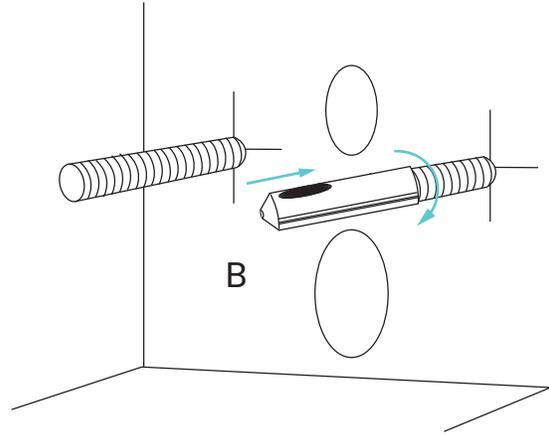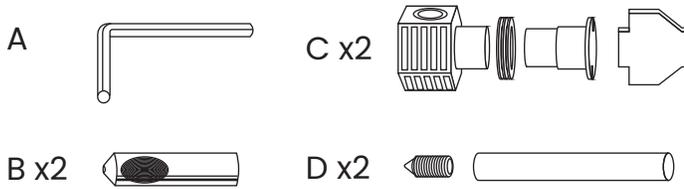


7 Attach Bowl

- Insert the retaining bolt (C) into the mounting hole on the back of the toilet from the inside.
- Secure the retaining bolt by screwing the two parts together using the retaining bolt key, use the allen wrench (A) to hold the retaining bolt (C) in place to tighten. Repeat for the other mounting hole.
- Apply lubricant to the joint surface on straight tube and connecting pipe, then place bowl onto the mounting bolts.

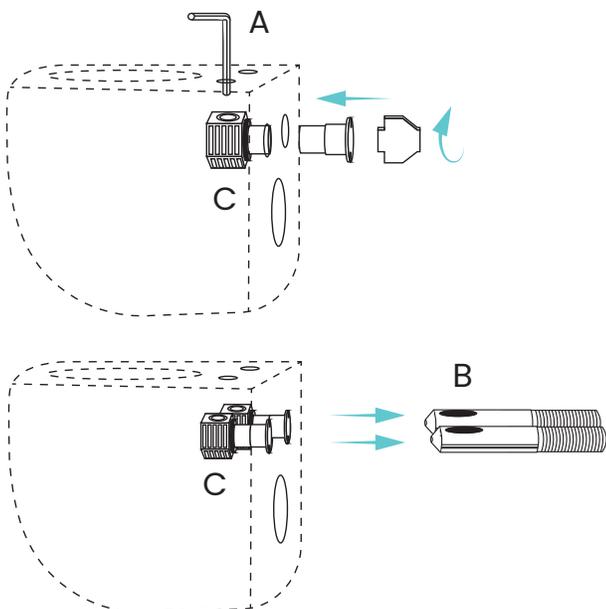

8 Secure and Seal


- Insert set screws (D) into the top of the retaining bolts (C) using the set screw installation tubes, then tighten with the allen wrench (A) to secure the bowl.
- Fill any gaps with cement or sealant to seal.

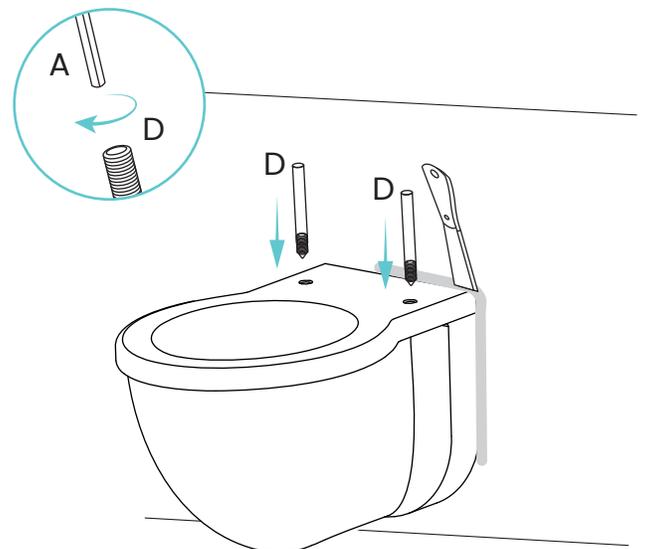

TOILET SEAT INSTALLATION


1 Disassemble

- Disassemble the cover cap and the hinge.

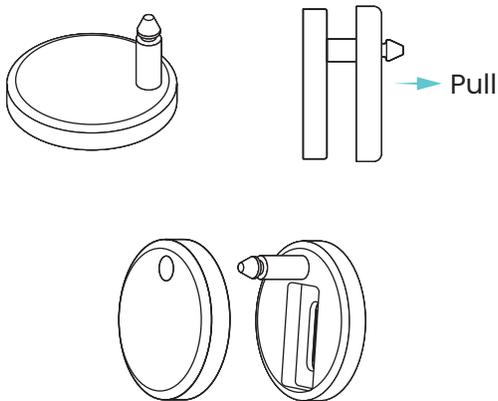


2 Construct Hinges

- Insert screw and nut into the hole on the hinge.
- Attach blind hole screw fixing to the bottom of screw.

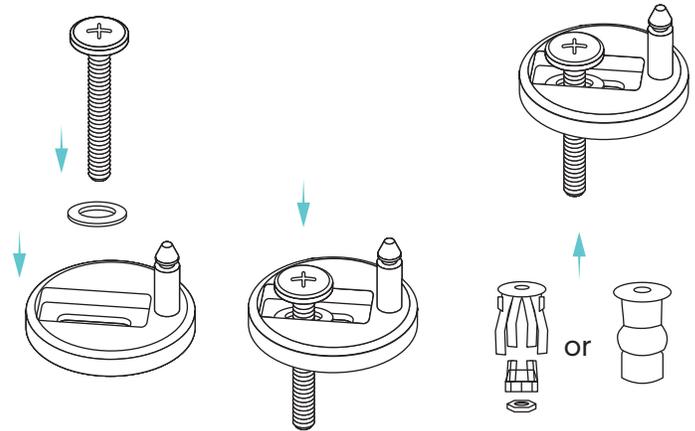


3 Attach Hinges

- Insert hinges with blind hole screw fixings attached into holes on toilet bowl.
- Lightly tighten hinges with a screwdriver to allow for later adjustment.

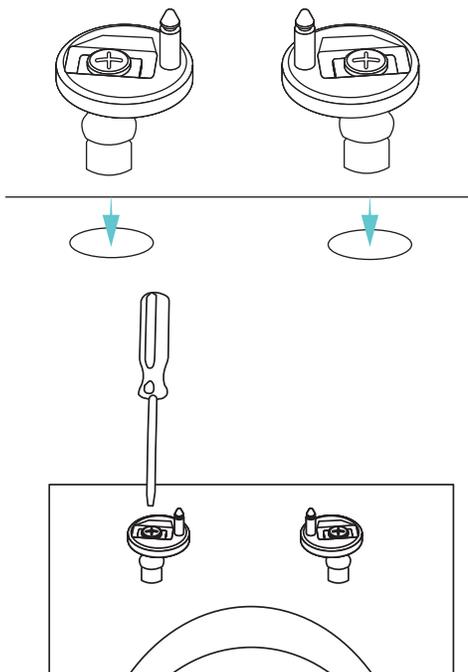


4 Adjust and Cover Hinges

- Be sure the hinge is all the way forward for proper seat fitting.
- Place the covers onto the hinges.

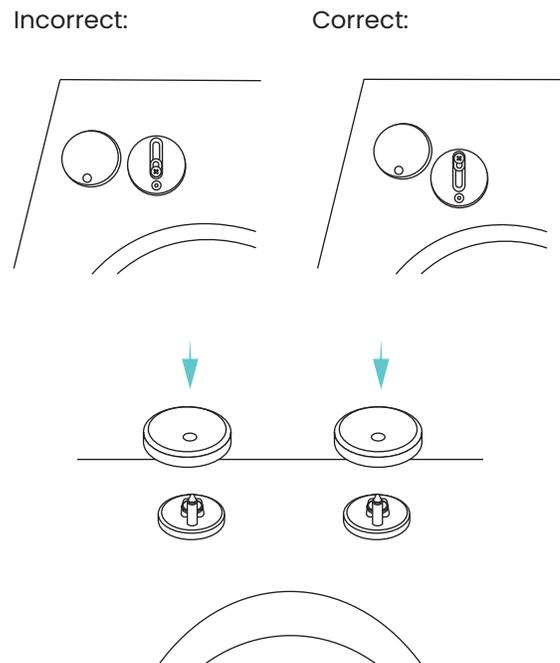

5 Adjust and Attach Seat


- Align seat to the hinges then firmly tighten the hinges.
- Attach seat to the secure hinges.
- Adjust seat to align to the bowl.

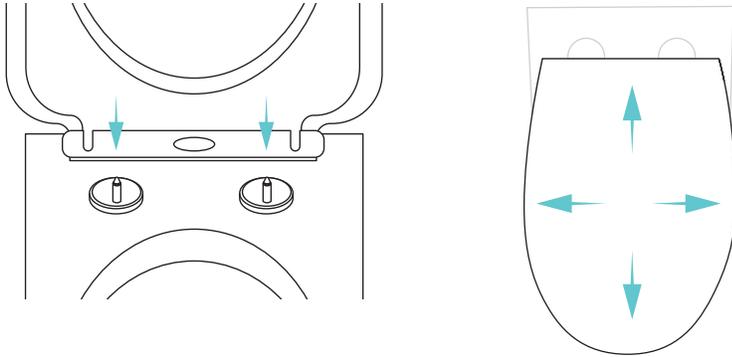


TOILET SEAT USAGE

- To remove, push middle button until you hear a “click”, then pull straight up.
- To re-install, align hinge posts with reference marks on seat, then push down until you hear a “click”.

One Button:

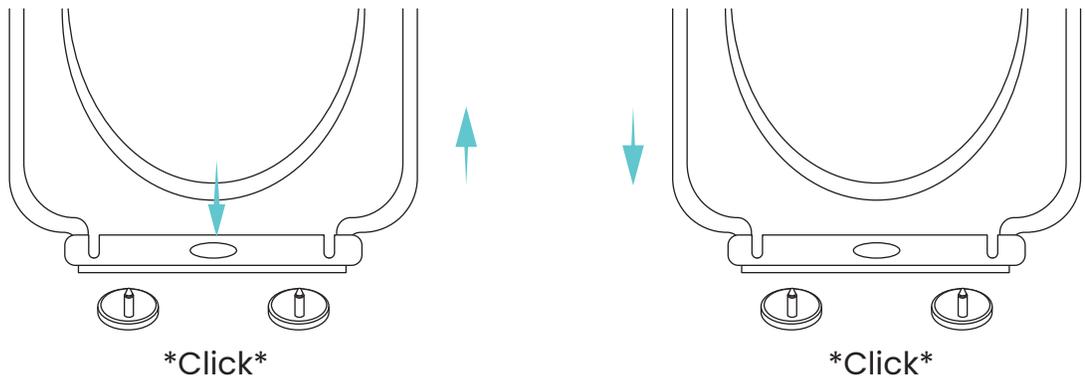


Two Button:

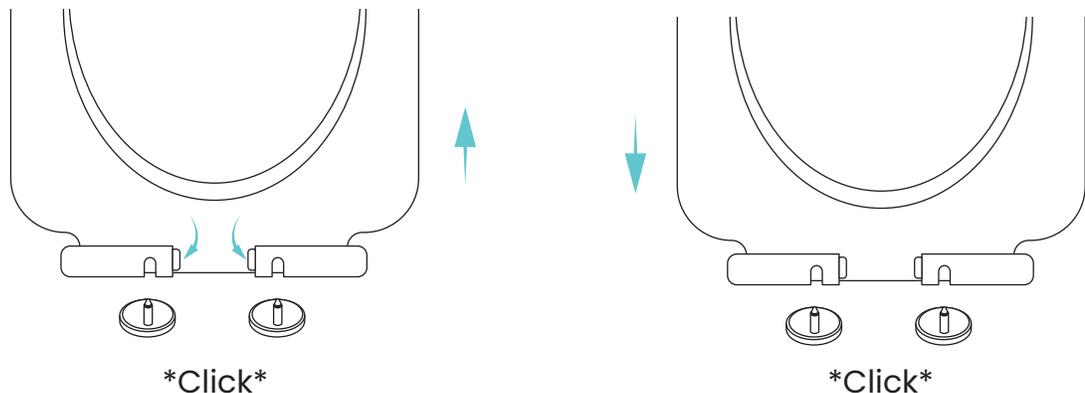

Wall-Mount Actuator Flush Plate

INSTALLATION INSTRUCTIONS

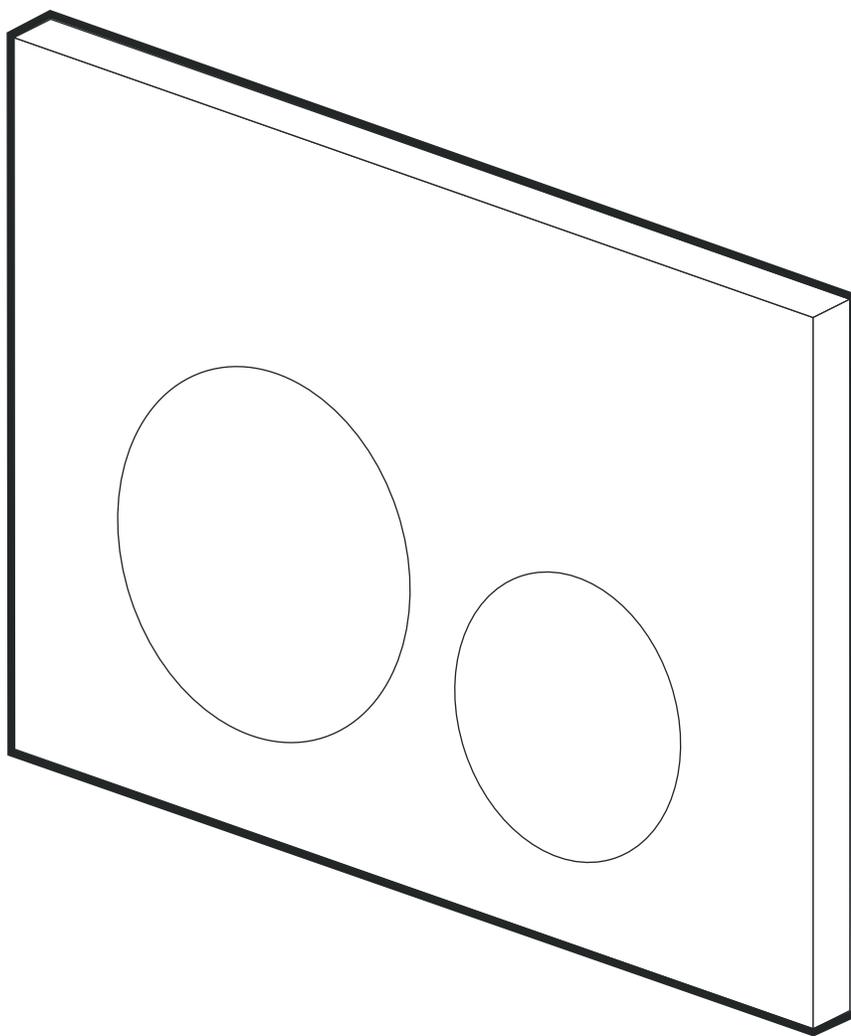



PRIOR TO INSTALLATION:

- Inspect product to ensure no damages have occurred while in shipping.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- The step-by-step guidelines in the installation instructions are a general reference. Should there be any discrepancies, Swiss Madison cannot be held liable. It is recommended to install all Swiss Madison products by hiring a licensed professional.
- Read installation and maintenance instructions thoroughly before installing. Be sure to use proper tools and always wear proper personal safety accessories for your protection.
- Make sure all wood studs and supports are properly installed.
- Confirm that your model will fit in intended location and plumbing fixtures are located where legally required before beginning installation.
- Verify all the necessary plumbing is installed by a certified plumber.
- This flush plate must be used with the back plate provided as a whole set.


QUESTIONS OR CONCERNS?

Please contact us:


1-434-623-4766

info@swissmadison.com

INCLUDED PARTS:



Flush Plate



Back Plate




Installation
Bolts


SUGGESTED TOOLS & MATERIALS:



Safety
Glasses



Tape
Measure




Level




Utility Knife


1

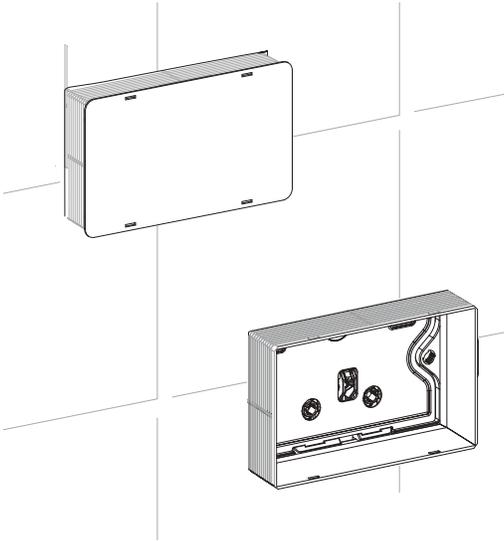


2

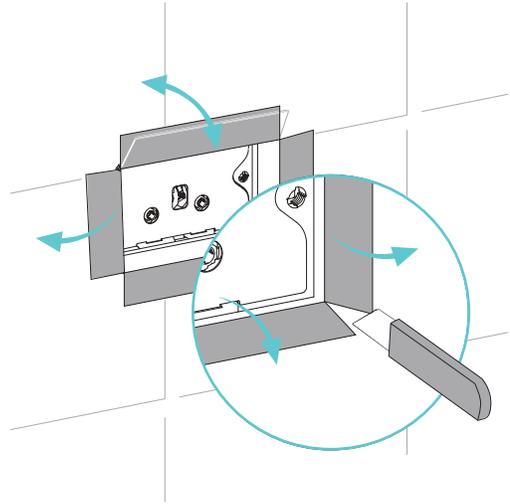


3

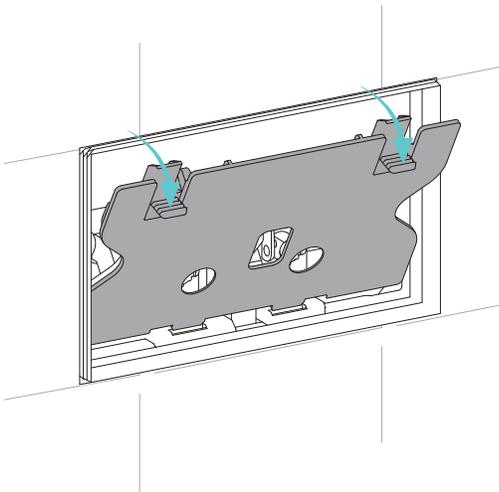


4

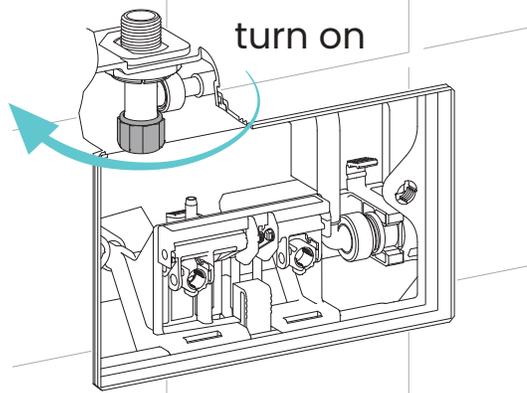


5

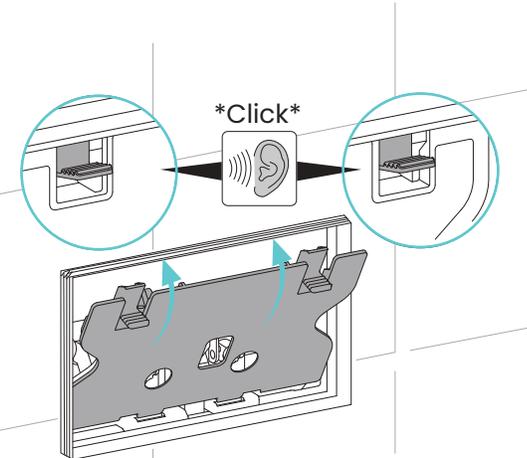


6

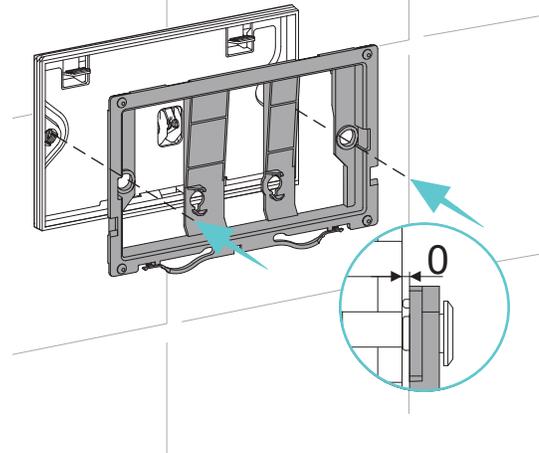


7

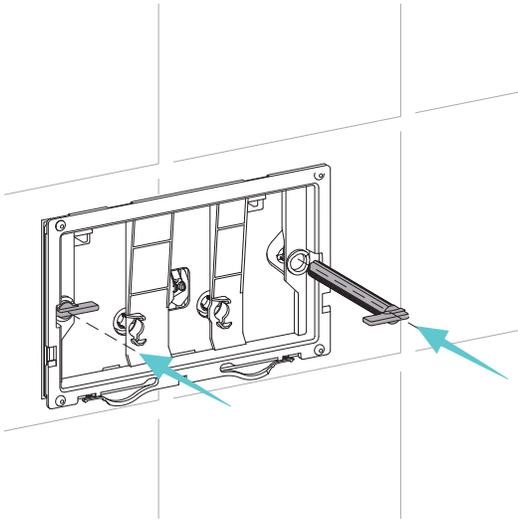


8

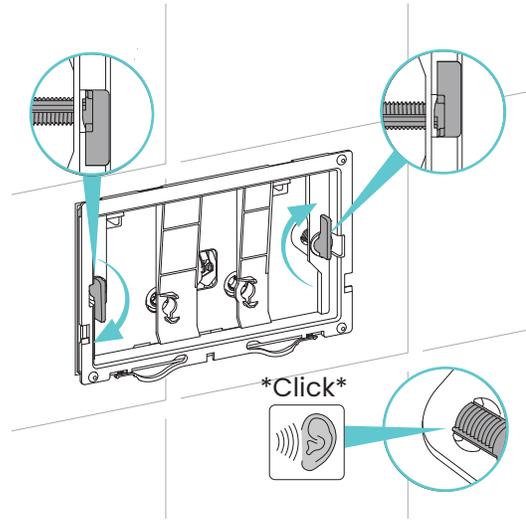


9

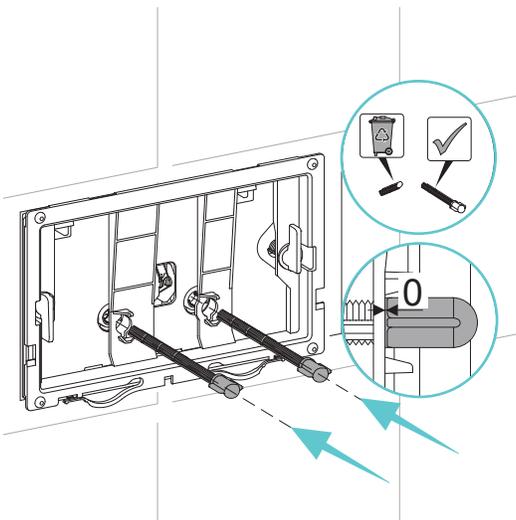


10

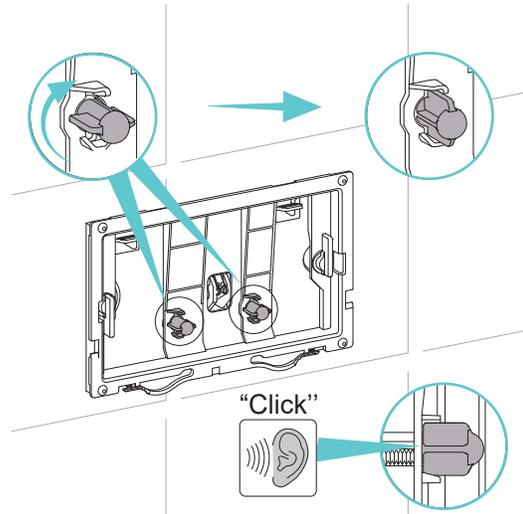

11

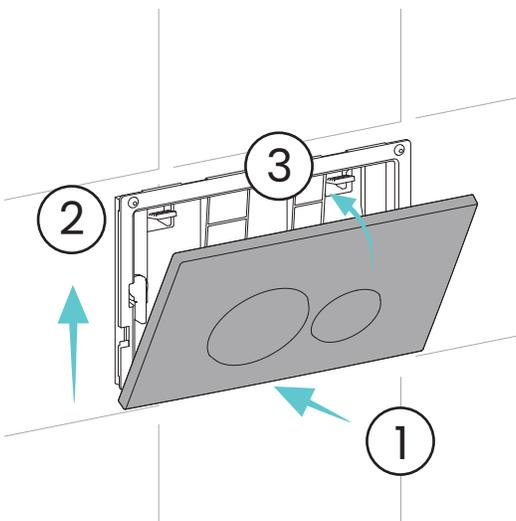

12

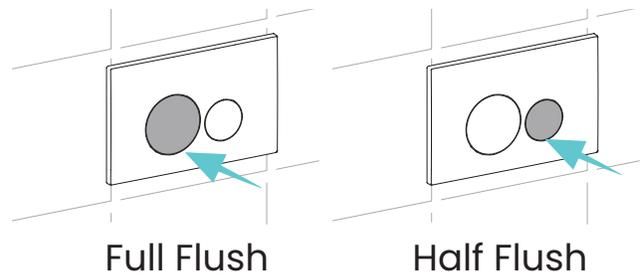

ONE-YEAR LIMITED WARRANTY

Swiss Madison® products are made with quality materials and excellent craftsmanship to provide our customers with beautiful, durable, long-lasting products. Should there be any defects in materials or craftsmanship under regular use that are discovered within the first year after delivery, Swiss Madison® will provide replacement parts at no charge, or at its discretion, replace any product or part of the product that is deemed defective, under normal installation, use, service or maintenance. This warranty applies only to the original purchaser. Proof of purchase must be submitted with any warranty claim.

Swiss Madison® recommends that all installations of Swiss Madison® products to be conducted by a licensed plumber or contractor. Swiss Madison® will not be held responsible for any damage or product failure due to improper installation, misuse, or failure to utilize a licensed plumber or contractor for installation. Swiss Madison® is not responsible for any installation or removal costs.

THIS ONE-YEAR LIMITED WARRANTY WILL BE VOIDED IF:

- The installation instructions were not followed by the installer
- The product has been moved from its initial place of installation
- The product has in any way been modified from its original condition
- The product has been subjected to improper maintenance, abuse, misuse, excessive use of chemicals, accidents, or other damages

Swiss Madison® makes no warranty that its products comply with any local building or plumbing codes. It is the consumer's responsibility and obligation to determine local code compliance prior to and during installation.

Swiss Madison® is not responsible for any special, incidental or consequential damages associated with the installation, replacement, return or use of the original purchaser's product. This includes, but is not limited to: freight costs, labor, travel time, lost profit, home damages and other contingent liabilities and costs (including, without limitation, costs associated with 'professionals' or 'experts', investigations, audits, analyses, attorneys and any other professional/hired services). Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

The Swiss Madison® warranty is a comprehensive and explicit limit of liability. All other warranties are hereby disclaimed and waived.

QUESTIONS OR CONCERNS? Please contact us directly at: 1-434-MADISON (623-4766)



WARNING:

Contents of your order may contain sharp and possibly other harmful pieces and may cause hazard to children and adults. Swiss Madison® is not responsible in any way for personal injuries or damages.