

1500CC EXTRACTION & FILL PUMP




REMOVABLE HANDLE

For better management
of the pump

ROTARY SWITCH

For easy control
of the flow

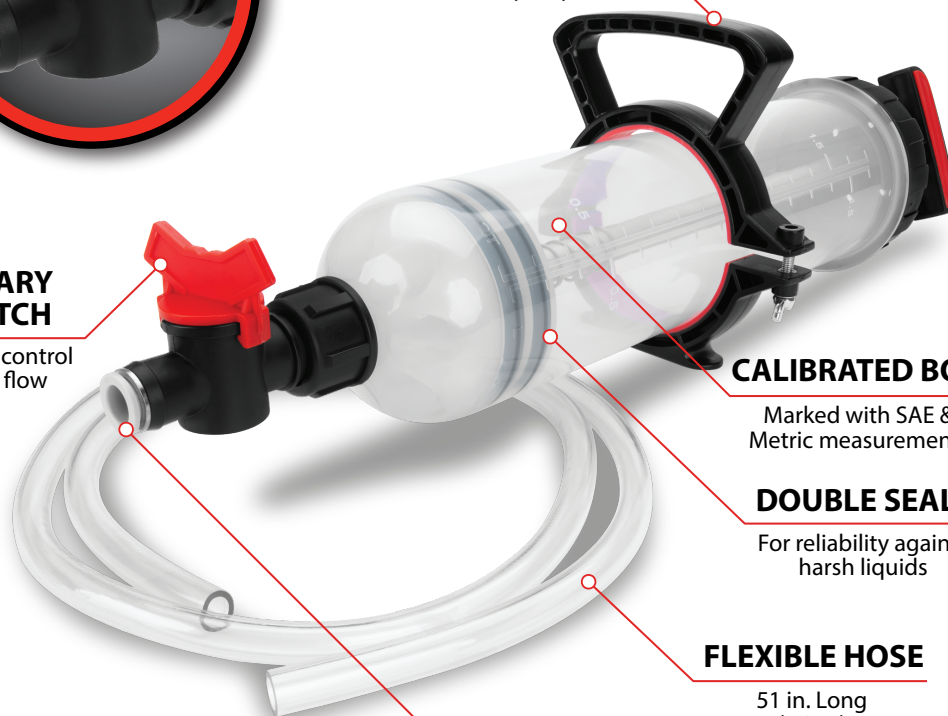

CALIBRATED BODY

Marked with SAE &
Metric measurements

DOUBLE SEALS

For reliability against
harsh liquids

FLEXIBLE HOSE

51 in. Long
(1.3 m)

HOSE COUPLER

Positive connection and
easy to remove

Item #	Inner	Master	UPC	Packaging
W54177	1	10	039564153914	Color Box

- Designed to remove and fill brake fluid, coolant, anti-freeze, gear oil, power steering fluid, and more
- Semi-translucent cylinder for viewing exact fluid volume and overall fluid condition
- Double seals for reliability against harsh liquids, and is easily disassembled for cleaning
- Heavy-duty construction with a removable handle for better management of the pump
- A unique hose coupler offers a positive hose connection but is still

- easy to remove
- Marked with SAE and metric measurements and a rotary on-off switch to control the flow
- Includes a transparent fluid extraction pump with rotary switch, and a flexible hose, 51 in. long (130 cm), 0.472 in. O.D. (12 mm) 0.354 I.D. (9 mm)

