
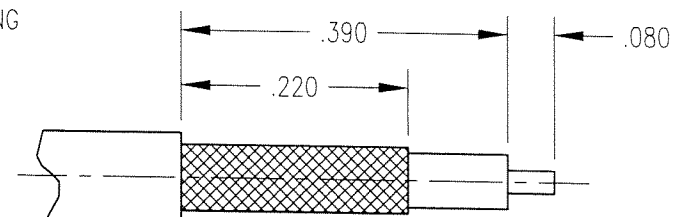


DWG. NO. 352-900-0750H			
REV	DESCRIPTION	BY DATE	APPD
F	ECR 6811	10/15/97	1/2/98

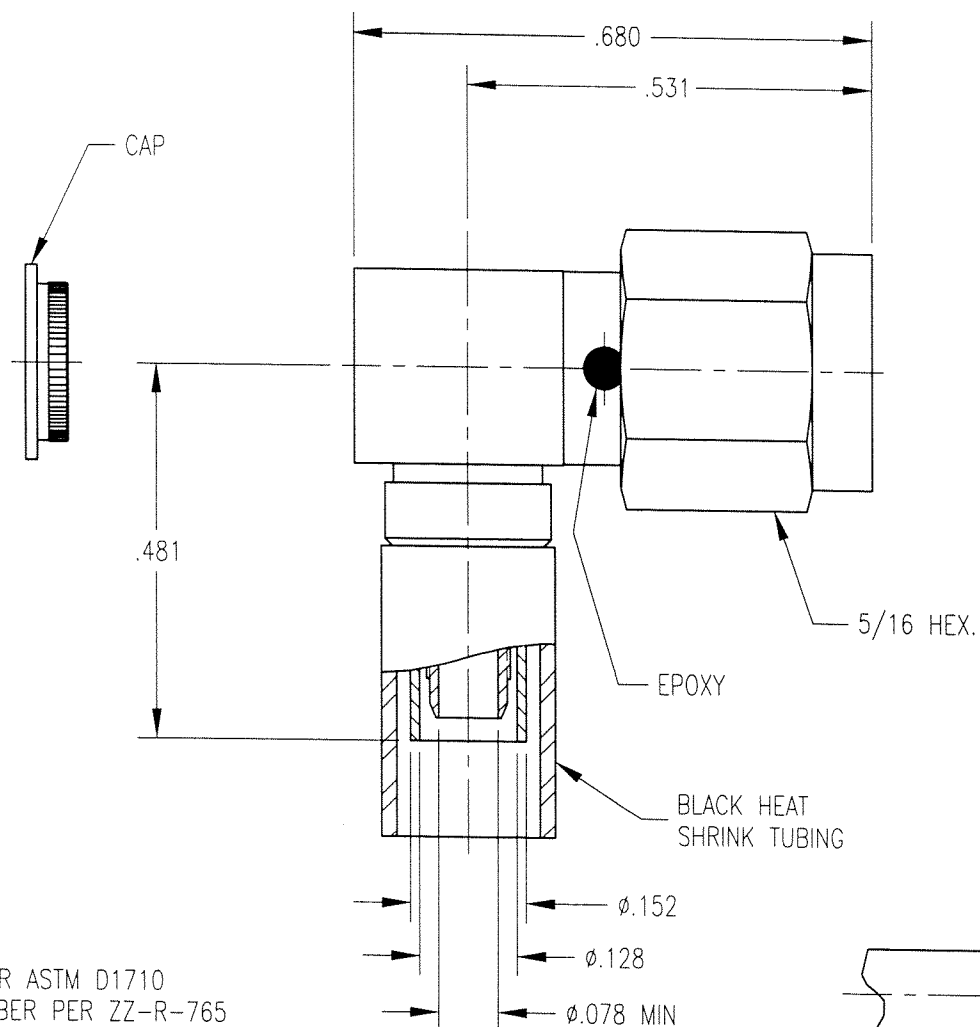

CABLE TRIM DIMENSIONS

NOTES:

1. MATERIALS:

INSULATOR: TEFLON PER ASTM D1710
 GASKET: SILICONE RUBBER PER ZZ-R-765
 RETAINING RING: BERYLLIUM COPPER PER ASTM B194
 ALL OTHER METAL PARTS: BRASS PER ASTM B16

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH HARTING 401.01.01 CABLE

4. FOR CABLING PROCEDURE USE CAP 9-05 WITH TRIMMING DIMENSION SHOWN.

5. CRIMP FERRULE USING A .178 HEX. DIE.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM)				Litton Winchester/Retconn 400 Park Road Waterford, Connecticut 06795	
TOLERANCES: DECIMALS .XX ± .01/0.254 XXX ± .005/0.127 ANGLES ± 2° SCALE: 4:1					
CUSTOMER DRAWING			TITLE SMA RIGHT ANGLE PLUG		
DRAWN GSA	DATE 4/10/97	CHECKED JMC	DATE 4/10/97	A 352-900-0750H	
APPROVED AT	DATE 4/10/97	APPROVED AT	DATE 4/10/97	SHT. 1	OF 1
				REV. F	