



INSTALLATION INSTRUCTIONS

SB-2411 Single Lever Faucet

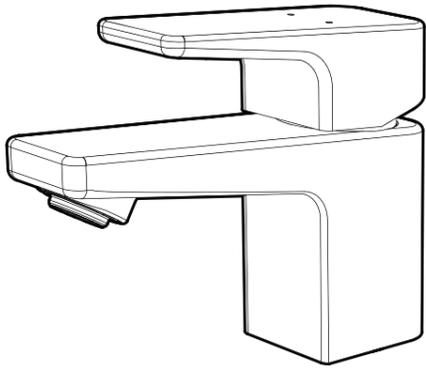

92-SB-2411-01

TOOLS & SUPPLIES NEEDED

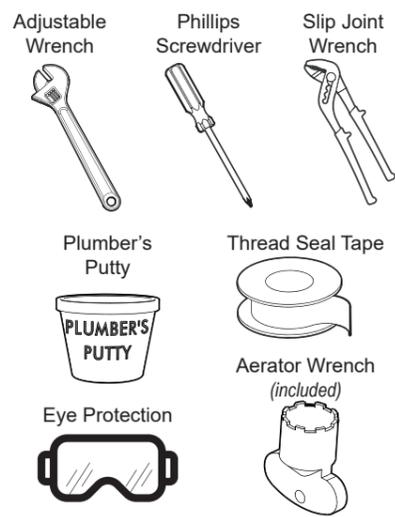

IMPORTANT

SAFETY TIPS:


Be sure to read and understand all instructions before beginning installation.
Inspect all connections after installation.
Cover the drain to avoid loss of parts.
Be sure to wear proper eye protection.
Do NOT over tighten any connections or damage may occur.
This faucet has an operating range of 20-80psi

FINISH MAINTENANCE:

Your new product is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with a soft cloth. Avoid abrasive cleaners, steel wool, and harsh chemicals as these will dull the finish and void your warranty.


PREPARE FOR MOUNTING

- 1 Verify Base Flange Gasket is properly aligned and installed into the groove at the base of the Faucet.

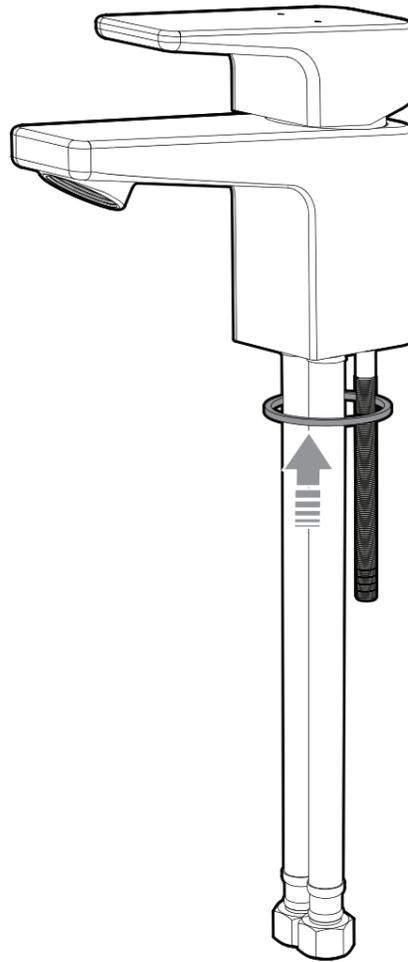

ALIGN INTO POSITION

- 2 Place Hoses, one at a time, through hole in mounting surface. Lower Faucet into position.

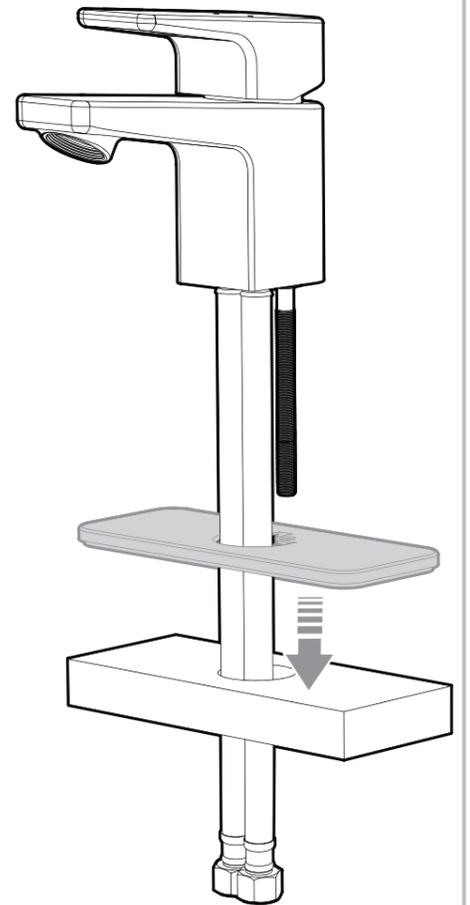

NOTE: If installing an optional deckplate, place hoses one at a time through the deckplate first, and then align all items to the mounting surface.

NEED HELP?

For additional assistance or service please contact:




800-537-2107



www.speakman.com


SECURE INTO POSITION

- 3 From below, install Rubber Washer (A), Metal Washer (B), and Mounting Nuts (C). Align Faucet to desired position and tighten Mounting Nuts (C).

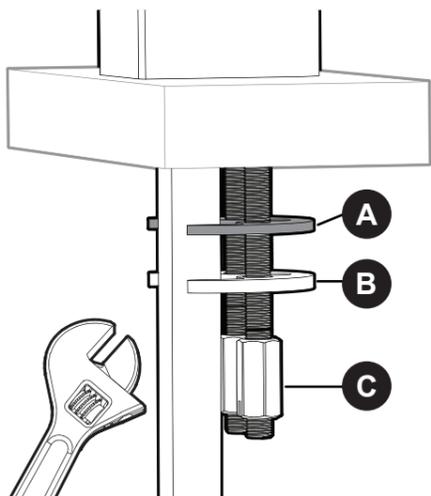


MAKE WATER CONNECTIONS

- 4 Make connections to water supplies. The inlet threads of the faucet are 9/16"-24 UNEF and will accept a 3/8" Compression Fitting. HOT and COLD hoses are clearly marked. Wrench Tighten.

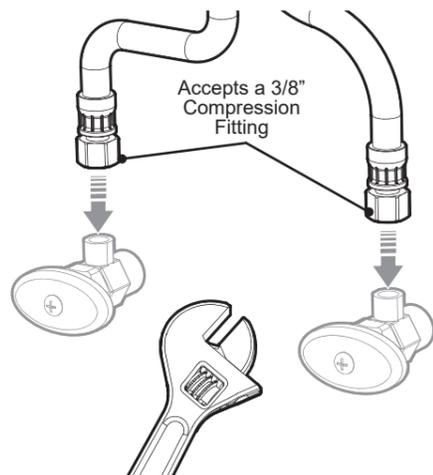


PREPARE DRAIN

- 5 Remove Mounting Nut (A), Metal Washer (B), and Sealing Washer (C) from Drain Assembly.

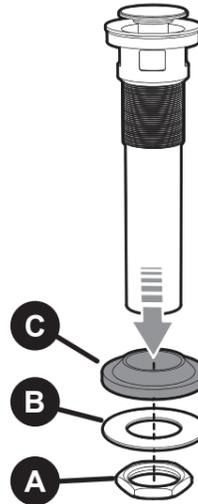


POSITION DRAIN

- 6 Apply included Upper Drain Seal (A) or Plumber's Putty to the underside of the Upper Flange. Insert Drain Assembly into drain hole of sink from above.

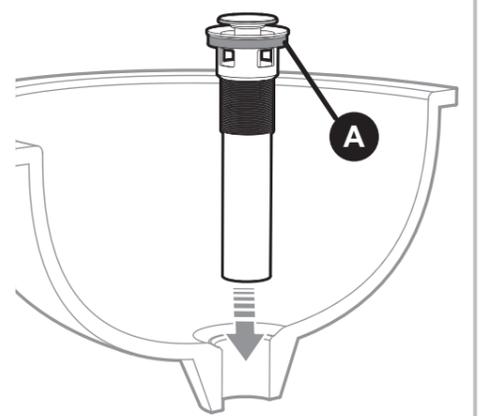


SECURE DRAIN

- 7 From below, reinstall Sealing Washer (C), Metal Washer (B), and secure with Mounting Nut (A). Tighten with Slip Joint Pliers. Take care to not over-tighten connection.

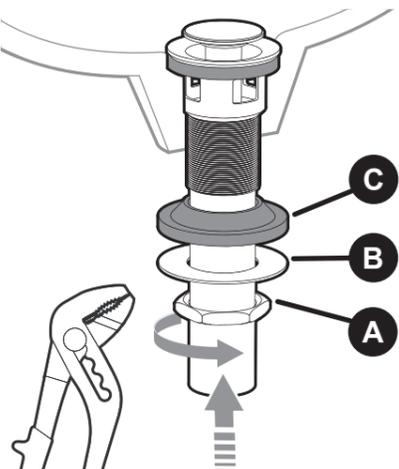


TEST DRAIN

- 8 Test Drain operation by pressing down on Stopper to open/close Drain.

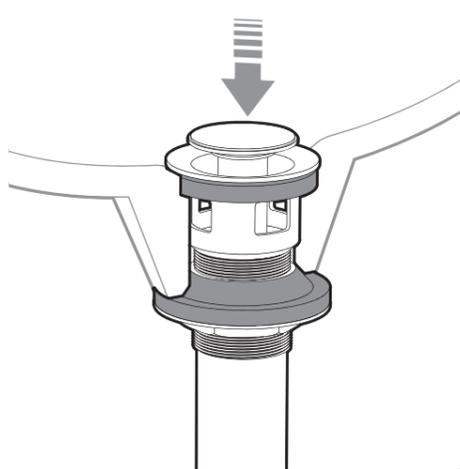


FLUSH SYSTEM

- 9 Turn ON Water Supplies and check for leaks. Activate faucet and flush both HOT and COLD water for 1 minute.

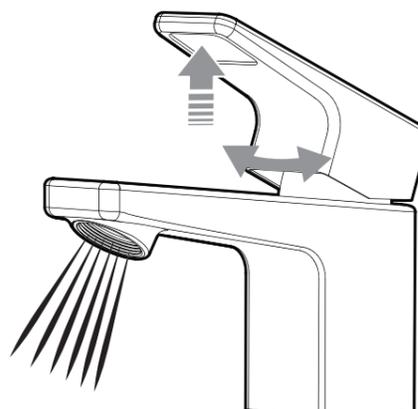


INSTALL AERATOR

- 10 Install Aerator with included Aerator Wrench.

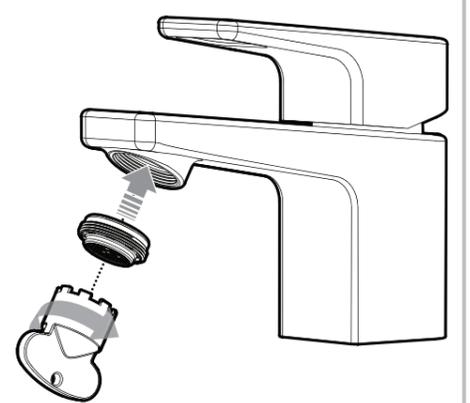

REPAIR PARTS

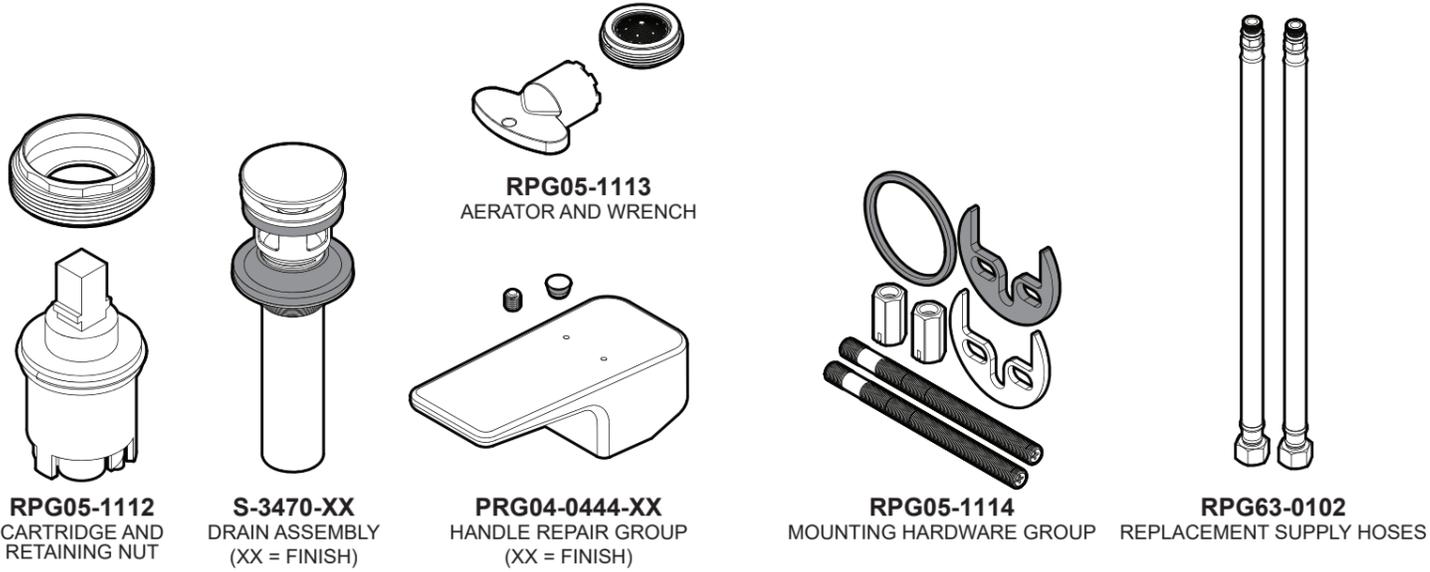

PRODUCT WARRANTY

For additional information please go to
www.speakman.com.

CALIFORNIA PROPOSITION 65




CALIFORNIA PROPOSITION 65:
WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov. Wash hands after installation, repair, or removal of this product.

ROUGH IN DIAGRAM


CONNECTIONS:

Hot Supply- 9/16"-24 (3/8 compression)
Cold Supply- 9/16"-24 (3/8 compression)

Contractor to supply necessary connections
not included with product.

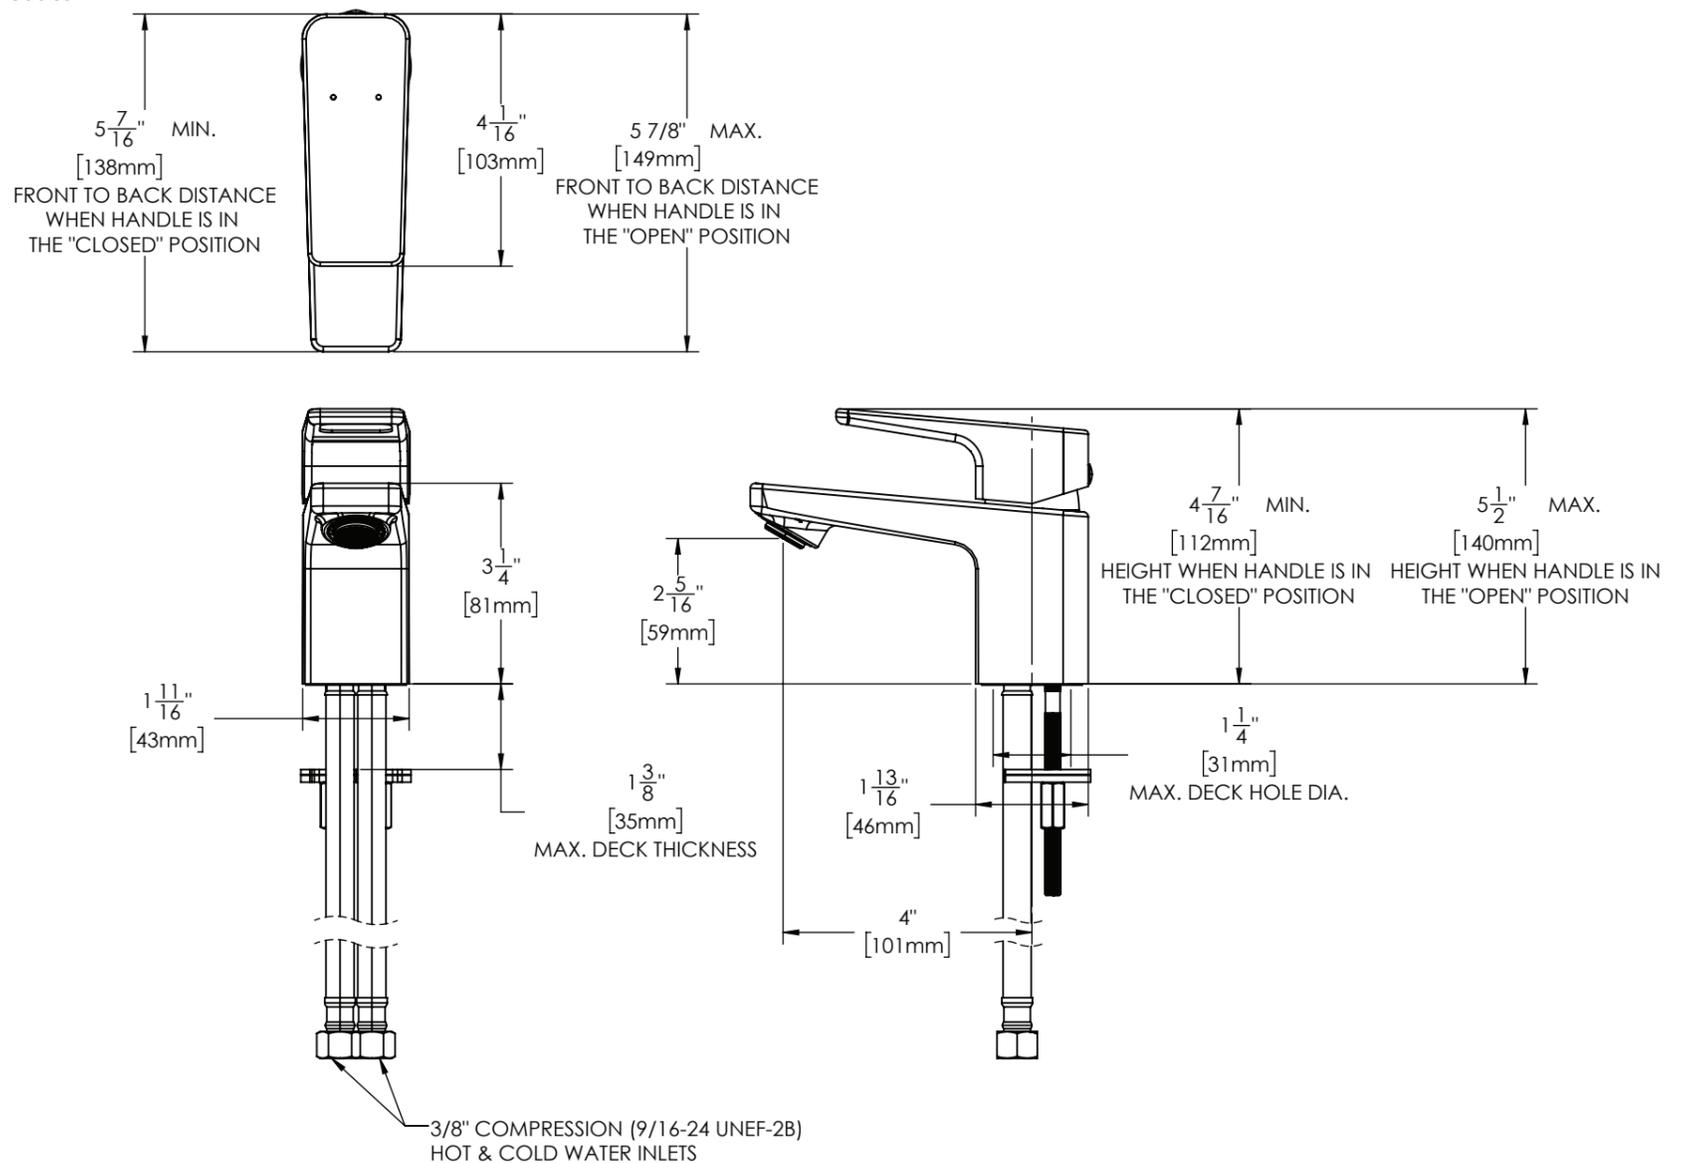

LAVATORY ROUGH-IN

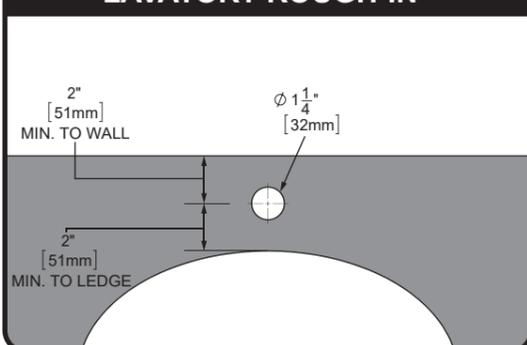

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE. FOR ADA
MOUNTING LOCATIONS, CONSULT ADAAG, ANSI A117.1, AND
LOCAL/STATE REGULATIONS.

