
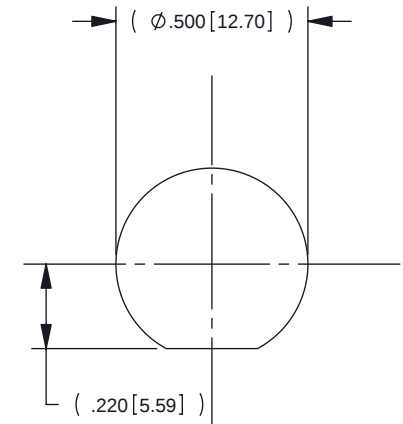
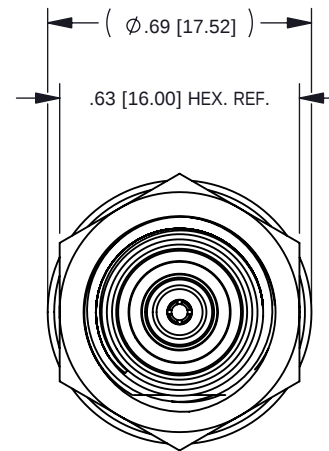
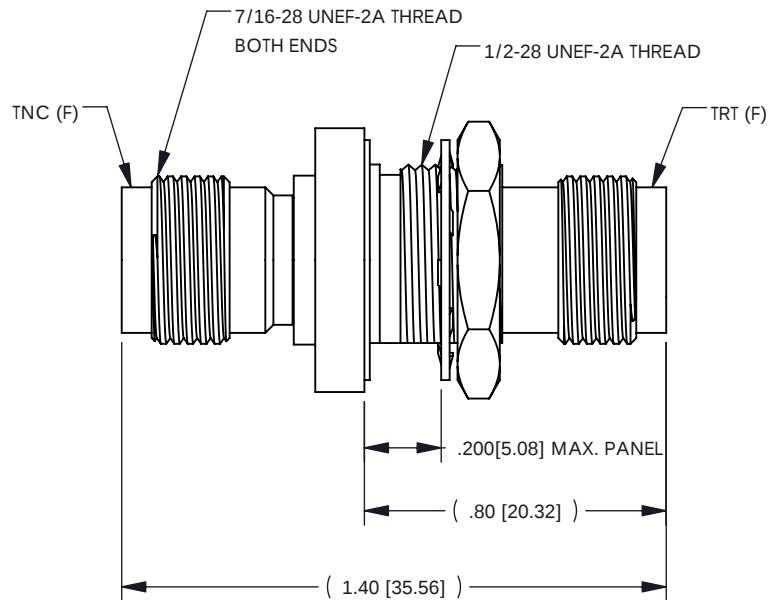


NOTES: UNLESS OTHERWISE SPECIFIED


- FOR GENERAL SERIES SPECIFICATIONS, SEE MIL-PRF-49142 (TRT) & MIL-PRF-39012 (TNC)
- MATERIAL SPECIFICATIONS:
INSULATORS: TEFLON, ASTM-D4894
GASKET: SILICONE RUBBER, A-A-59588
LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103
CONTACT: BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISH SPECIFICATIONS:
CONTACTS: .000050 MIN GOLD PER ASTM-B488, OVER .000050 MIN NICKEL PER SAE-AMS-QQ-N-290
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER SAE-AMS-QQ-N-290, OVER .000050 MIN COPPER PER ASTM-B734
- ELECTRICAL SPECIFICATIONS:
WORKING VOLTAGE: 400 VRMS
NOMINAL IMPEDANCE: NON-CONSTANT
FREQUENCY RANGE: DC TO 500 MHZ
- LOCKWASHER AND HEX NUT SHIPPED LOOSE
- INTERFACES PER MIL-STD-348, FIG. 202-2 (TRT) & FIG. 313-2 AS APPLICABLE (TNC)

REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER EWR08-ER8154	HVN 05/20/08	N/A

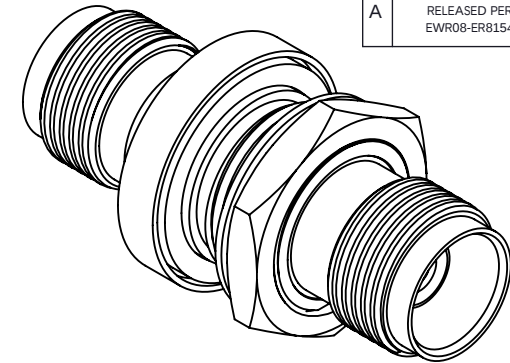

MOUNTING HOLE

CATALOG P/N: 1949-11-9

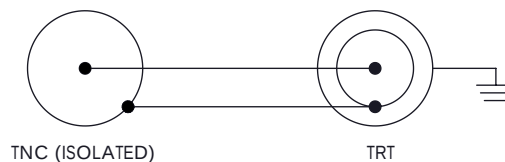

SCHEMATIC

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .xx [x.x] 0 .01 [0.3] .xxx [x.xx] 0 .005 [0.13] .xxxx [x.xxx] 0 .0001 [0.025] ANGLES: 0 2A ±SCALE: 2:1				 Winchester Electronics  Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER DRAWING					TNC-TRT ADAPTER, F-F, BULKHEAD		
DRAWN HVN	DATE 05/20/08	APPROVED HVN	DATE 05/22/08	A	SD1949-11-9	SHT 1 OF 1	REV A
APPROVED DC	DATE 05/22/08	APPROVED BM	DATE 05/22/08				