



EMCORE

BY EMSER TILE™

LUXURY VINYL COLLECTION



12 MIL

Emcore™ is a 5MM SPC product with a 12 mil wear layer. This collection of vinyl plank products is appropriate for any interior flooring application. Emcore™ is a solid-core construction, waterproof material that is stain-, scratch- and dent-resistant. It is offered with 15 different graphic faces and a Uniclic® Locking System that provides the realistic look of wood with easier installation and maintenance.

Mitford™ (Also Available as a Glue-Down System)

7" x 48"

Aliso



Pismo



Zuma



Monarch™

7" x 48"

Lancaster



Tudor




Stuart




Viceroy™ (Also Available as a Glue-Down System)

7" x 48"

Almanza

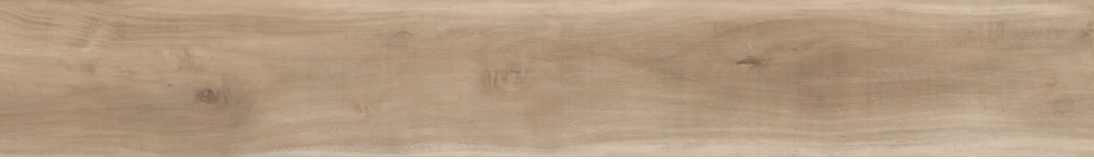

Cordoba

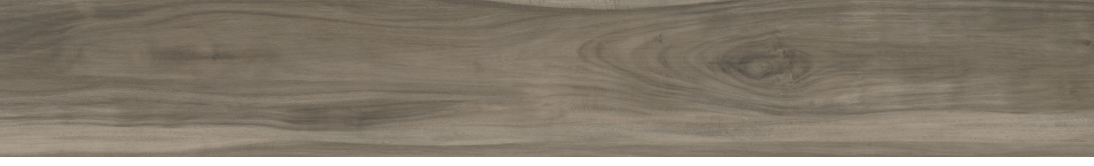

Marquina



20 MIL

Emcore™ is a 5MM SPC product with a 20 mil wear layer. This collection of vinyl plank products is appropriate for any interior flooring application. Emcore™ is a solid-core construction, waterproof material that is stain-, scratch- and dent-resistant. It is offered with 15 different graphic faces and a Uniclic® Locking System that provides the realistic look of wood with easier installation and maintenance.

Oxford™ (Also Available as a Glue-Down System)

7"x48"

Hermosa



Brea



Ojai




Windsor™

7"x48"


Barstow



Solvang

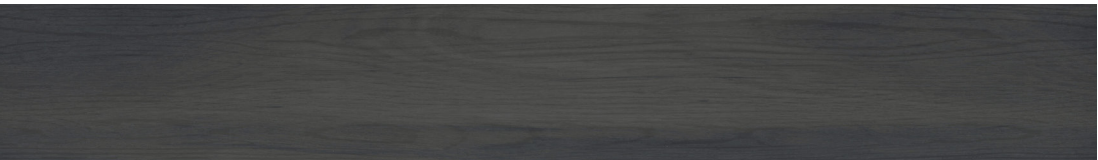

Malibu

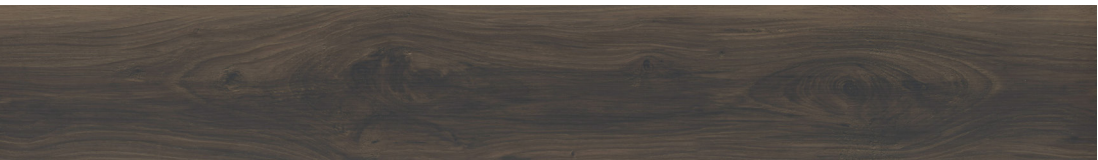

Trim

(Available for all Series and Colors)

Reducer



T-Moulding



End Cap



Stair Nose Flush



12 MIL PRODUCT INFO

Thickness	5mm
Wear Layer	12mil
Solid Core	3.2mm
Underlayment	1.5mm IXPE Pad
Click System	Uniclic® (Short & Long)
UV Coating	Yes
Water Resistant	Yes
Warranty	35 Year Limited Residential Wear Warranty 5 Year Limited Commercial Wear Warranty

20 MIL PRODUCT INFO

Thickness	5mm
Wear Layer	20mil
Solid Core	3.0mm
Underlayment	1.5mm IXPE Pad
Click System	Uniclic® (Short & Long)
UV Coating	Yes
Water Resistant	Yes
Warranty	35 Year Limited Residential Wear Warranty 5 Year Limited Commercial Wear Warranty

TESTING RESULTS

Squareness ASTM F2421	PASS
Dimensional Tolerances ISO 24337	PASS
Dimensional Stability ASTM F2199	PASS
Slip Resistance DIN 51130	R10
Residual Indentation ASTM F1914	PASS (0.001")
Deep Abrasion ASTM D4060	25,000 CYCLES
Resistance to Bacteria ASTM G21	0 - PASS
Castor Chair Resistance ANSI LF-01	PASS (25,000 CYCLES)

Heat Stability ASTM F1514	PASS (<2MM)
Resistance to Chemicals ASTM F925	PASS
Smoke Density ASTM E662	<450
Impact Sound Reductions ASTM E2179	Δ IIC 55 dB
Stain Resistance ASTM E423	NOT AFFECTED
Heavy Metals ASTM F963-16	FREE - PASS
Emissions Testing CDHP/CAL 1350	PASS (0g/L)
VOC Requirements ASTM D5116	PASS (0g/L)

The Emcore™ collection by Emser Tile™ contains no phthalates or heavy metal and is 100% virgin vinyl.
The wear layer on all products is comprised of a ceramic bead coating. Requires expansion joints every 10 meters x 10 meters.

EMCORE

BY EMSEER TILE™ LUXURY VINYL COLLECTION

TILE LOOKS

Hylton™

12"x24"



Gray



Ivory




Leeds™

12"x24"



Cream

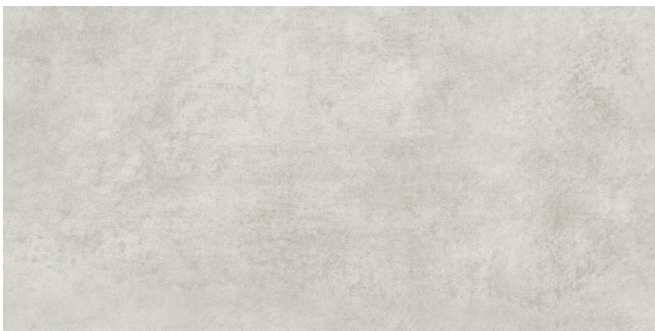

Gray



Scan Code for more
Product Info!



12 MIL

Emcore™ is a 5MM SPC product with a 12 mil wear layer. This collection of vinyl products is appropriate for any interior flooring application. Emcore™ is a solid-core construction, waterproof material that is stain-, scratch- and dent-resistant. It is offered with 15 different graphic faces and a Uniclic® Locking System that provides the realistic look of tile with easier installation.

Reign™

12”x24”



Milk



White



Trim

T-Moulding



End Cap



PRODUCT INFO	Thickness	5mm	TESTING RESULTS	Squareness ASTM F2421	PASS	Resistance to Bacteria ASTM G21	0 - PASS	Stain Resistance ASTM E423	NOT AFFECTED
	Wear Layer	12mil		Dimensional Tolerances ISO 24337	PASS	Castor Chair Resistance ANSI LF-01	PASS (25,000 CYCLES)	Heavy Metals ASTM F963-16	FREE - PASS
	Solid Core	3.7mm		Dimensional Stability ASTM F2199	PASS	Heat Stability ASTM F1514	PASS (<2MM)	Emissions Testing CDHP/CAL 1350	PASS (0g/L)
	Underlayment	1mm IXPE Pad		Slip Resistance DIN 51130	R10	Resistance to Chemicals ASTM F925	PASS	VOC Requirements ASTM D5116	PASS (0g/L)
	Click System	Uniclic®(Short&Long)		Residual Indentation ASTM F1914	PASS (0.001")	Smoke Density ASTM E662	<450		
	UV Coating	Yes		Deep Abrasion ASTM D4060	25,000 CYCLES	Impact Sound Reductions ASTM E2179	Δ IIC 55 dB		
	Water Resistant	Yes							
	Warranty	35YearLimitedResidential Wear Warranty 5YearLimitedCommercial Wear Warranty							

The Emcore™ collection by Emser Tile™ contains no phthalates or heavy metal and is 100% virgin vinyl.
The wear layer on all products is comprised of a ceramic bead coating. Requires expansion joints every 10 meters x 10 meters.

UNICLIC® LOCKING SYSTEM



Monarch™ Tudor