




# Juno LPFM LED


Surface Mount Luminaire

1' x 4'

## LPFM Series

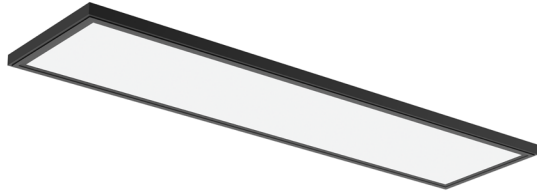

### Dimensions

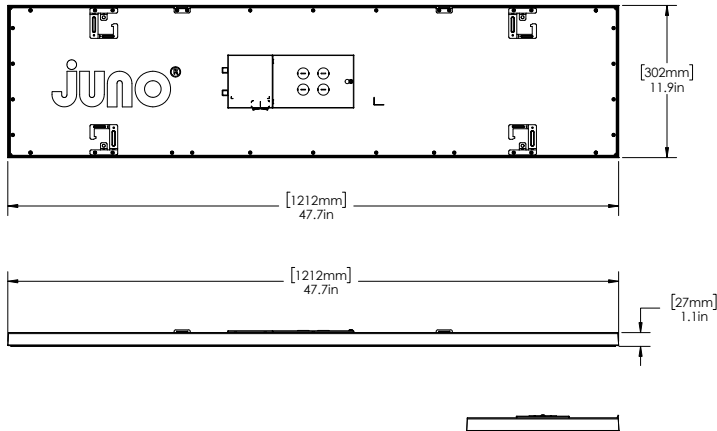

Project:
Fixture Type:
Location:
Contact/Phone:

### Product Features

The LPFM from Juno® is a low-profile flat panel that offers the ultimate in mounting versatility, color temperature flexibility and trim options. The versatile mounting can be installed direct to ceiling or recessed or suspended (accessory sold separately). For Switchable color temperature simply adjust the color temperature from neutral white (3500K) to cool white (4000K) to daylight (5000K). Includes an interchangeable black or white trim. Unit is dimmable and compatible with most 120V dimmers. The Dimming Range is 100% - 10% Continuous dimming.

### Applications

- Due to the versatility of LPFM, it makes it ideal for both residential, new construction and renovation applications such as garages, laundry rooms, storage areas, finished basements, and home gyms.
- Direct ceiling surface mount kit (DCMK 14) included

### Performance

Delivered Lumens	LPFM 1X4 40LM = 4000L
Led Color Temperature	Switchable White (3500K, 4000K, 5000K) Default set at 3500K
CRI	80
Voltage	120V
Dimming	Phase Dimming down to 10%

### Specifications

	Width	Depth
LPFM	11.9 (30.22)	1.1 (2.79)
Add a Length and the value is 47.7 (121.15)		

All dimensions are in Inches (centimeters) unless otherwise indicated.



# Juno LPFM LED

Surface Mount Luminaire

1' x 4'



LPFM

## ORDERING INFORMATION

Catalog Number	UPC	Description	Nominal Lumens	Color Temperature	CRI	Voltage	Wattage
LPFM 1X4 40L SWVW7 120 TD DCMK WBT	196183688248	1X4 Switchable CCT Flat Panel with Bracket	4000	3500/4000/5000K	80CRI	120V	38

## Specifications

### Construction

Built to last with an aluminum frame for strength and durability, the seamless frame prevents light leak in the corners • The satin white lens provides excellent shielding and a fully luminous appearance • LPFM's low-profile design provides increased installation flexibility especially in restricted plenum spaces • The back plate includes integral T-bar clips for installation into 9/16" or 15/16" T-grid ceilings • Fixture may be direct ceiling mounted with the DCMK 14 surface mount bracket (included) onto a hard ceiling • Fixture may be mounted and wired in continuous rows.

### Electrical

Long-life LEDs, coupled with a high-efficiency driver, provide superior illumination for extended service life • 70% LED lumen maintenance at 60,000 hours (L70/60,000) • 0-10V dimming driver, dims to 10% and contains non-isolated dimming leads • Switch set to max high lumen output at the factory • For optimal 0-10V dimming performance it is recommended that the luminaire remains at factory default high lumen setting.

### Installation

Refer to Installation instructions.

### Ratings

Certified for damp locations, IC certified

### Warranty

3-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.



# Juno LPFM LED


Surface Mount Luminaire  
1' x 4'




LPFM

## PHOTOMETRICS

LPFM 1X4 40L SWW7 120 TD DCMK WBT\_3000K Input Watts: 37.1, Delivered Lumens: 4568, LPW: 123.1, S/MH: 1.29, Test No: ISF 211239P

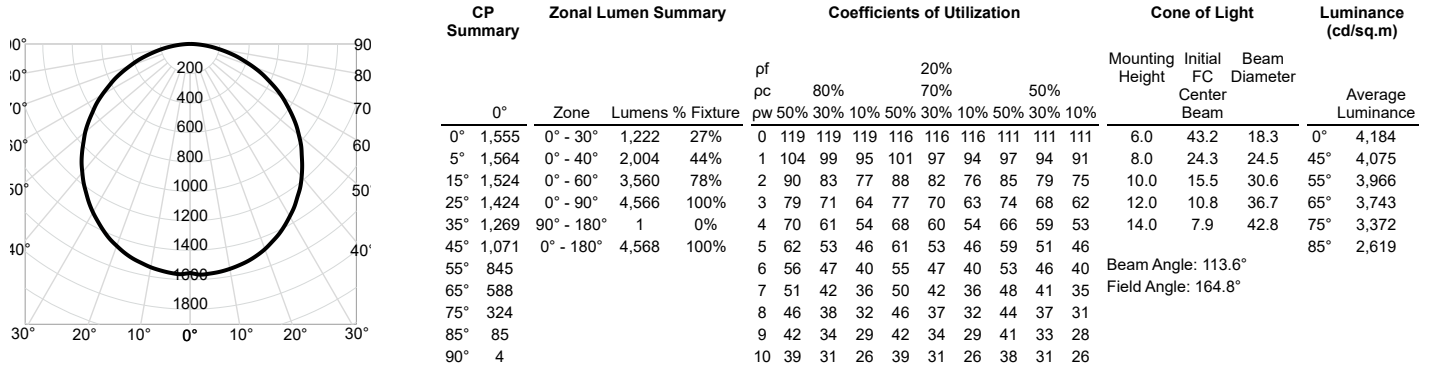

LPFM 1X4 40L SWW7 120 TD DCMK WBT\_4000K Input Watts: 38.8, Delivered Lumens: 4272, LPW: 110.1, S/MH: 1.29, Test No: ISF 211239P

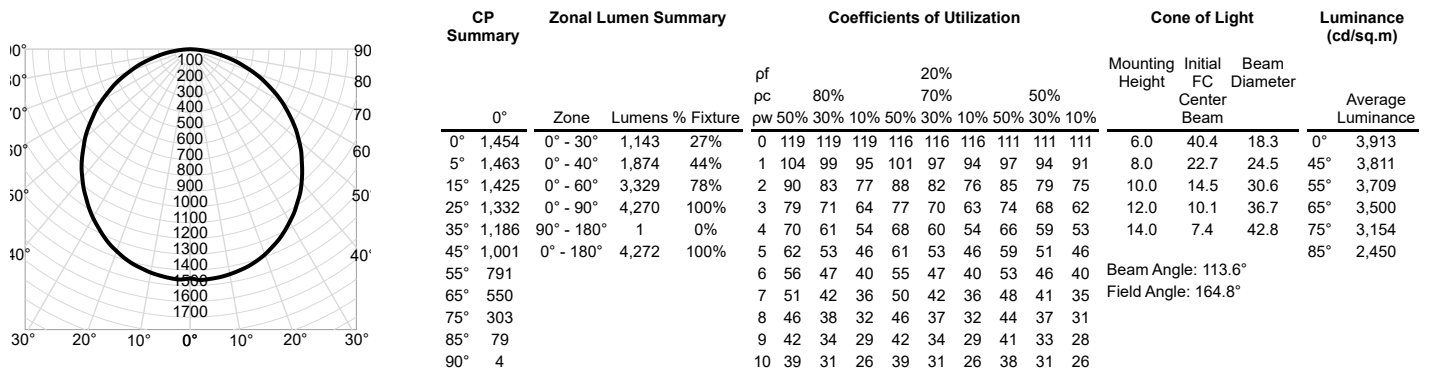

LPFM 1X4 40L SWW7 120 TD DCMK WBT\_5000K Input Watts: 38.6, Delivered Lumens: 4352, LPW: 112.7, S/MH: 1.29, Test No: ISF 211239P

