


Item: AC-AZSR55**

AC-AZSR88**

ANZZI SHOWER ROD

INSTALL & OPERATION MANUAL

V1.0

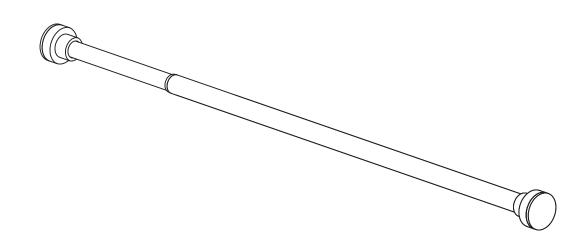

DON'T WAIT! REGISTER NOW!

Register your product within 90 days to ensure your product is recognized as an official purchase and is eligible for warranty coverage.

Mail in the completed registry card (Pg. 2) or register online at www.swcorp.com/register.



PRODUCT REGISTRATION*

IMPORTANT: YOUR WARRANTY WILL NOT BE RECOGNIZED UNLESS THIS CARD IS FULLY COMPLETED AND RETURNED OR ONLINE REGISTRATION IS COMPLETED.

To ensure that your warranty is registered and confirmed please do one of the following:

- **1.** Register on line at www.swcorp.com/register. You will be asked to fill out the same information you would in the registration card. Registering on line is fast, secure and ensures we receive your information.
- **2. Complete, cut-out and mail the registration card below.** By returning this registration card we confirm the date of purchase for your new product. This confirmation will allow us to process any warranty claims.


Mail the card to: 5701 NW 35 Avenue, Miami, FL 33142

Q	CUT	ALC	NG
-	DOT	TED	LINE
			

	DOTTED LINE.		
Product Registration Card			
Name	Address		
City State	Zip		
Phone Email			
Date of Purchase			
Installer's Name	Phone		
I have read the Owner's Manual carefully and understand and agree that any installation, operation or maintenance of the product must be done strictly in accordance with instructions and guidelines contained in the owner's manual and installation guide.			
Signature	Date		




PACKAGE AND HARDWARE CONTENTS

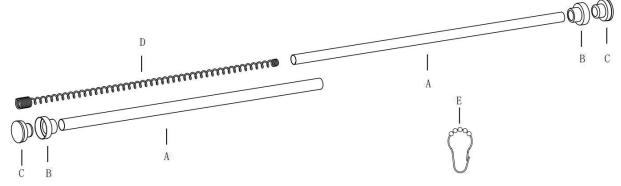


PART	DESCRIPTION	QUANTITY
А	Stainless steel pipe	2
В	Stainless steel foot cover	2
С	Rod base	2
D	Spring	1
E	Shower curtain ring	12

AC-AZSR55** 33"-55"



AC-AZSR88** 48"-88"


48-88inch





Installation Guide


- 1. It is necessary to confirm how much distance the wall surface of the telescopic shower curtain rod is installed.
- 2. Rotate the shower curtain rod to elongate it



3. Adjust the shower curtain rod to a length about 1.4 inch longer than the distance from the wall surface.



4. Place one end of the shower curtain rod on the wall surface, tilt the shower curtain rod and then compress the spring to make the shower curtain rod between the wall surfaces. After adjusting the position of the shower curtain rod to level, release the shower curtain rod to make it rebound and fix on the wall surface.

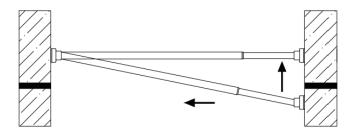

Spring Operated

The telescopic shower curtain rod is of full spring structure, and is fixed by the pressure generated by the telescopic spring and the supporting force of the wall surface.

Attention:

Please do not turn the shower curtain lever when installing the fixed shower curtain lever.