

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides an LED lighting platform to deliver general ambient lighting for surface-mount ceiling applications. Light engine delivers long life and excellent color to ensure a quality, low-maintenance light installation. Ideal for use in kitchens, offices, hallways, corridors, foyers, bedrooms, closets, utility work areas and more.

### CONSTRUCTION

The Crest is constructed of an acrylic diffuser flanked by decorative steel end caps in brushed nickel. The diffuser provides even illumination and softens the appearance of the LEDs for improved aesthetics.

### OPTICS

The Crest has a selectable color temperature switch for 3000K, 4000K, and 5000K. The 48IN produces 3800 lumens at 4000K (See Lighting Facts labels for all CCT lumens), all at 50,000 hours life.

The extruded acrylic diffuser minimizes LED image and provides high-angle brightness control.

### ELECTRICAL

Long-life LEDs, coupled with a high-efficiency driver, provide extended service life. Standard input = 42 watts, 90 lumens per watt. Fixture is rated to deliver L70 performance at 50,000 hours and operates at 120 volts, 60Hz.

Works with most standard incandescent dimmers (see list of approved dimmers).

### LISTINGS

CSA Listed to US and Canadian safety standards. Listed for damp locations. ENERGY STAR® certified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

### Specifications


48"

Width: 6.4 (16.3)

Length: 47 (119.4)

Depth: 3.1 (7.8)

Weight: 5.95 (2.7kg)

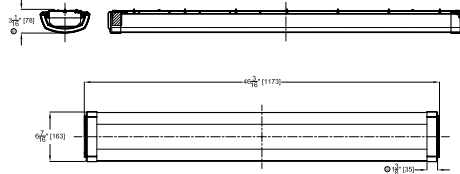

All dimensions are inches (centimeters) unless otherwise indicated.



|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Decorative Indoor

# Crest

## Linear Flush Mount with Selectable Color Temperature

LINEAR LED

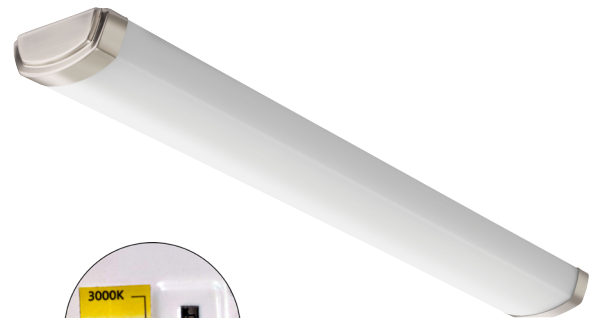

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.


**Example:** FMLCRSLS 48IN 30K40K50K 90CRI BN

| Series                           | Length                 | Color temperature | CRI       | Finish                   |
|----------------------------------|------------------------|-------------------|-----------|--------------------------|
| <b>FMLCRSLS</b> LED Linear Crest | <b>48IN</b> 4' Nominal | 30K40K50K         | 90CRI >90 | <b>BN</b> Brushed nickel |


# LED Linear Flush Mount Crest

## PHOTOMETRICS


FMLCRSLS 48IN 30K 90CRI, 3,167 delivered lumens, test no. ISF 35479 A, tested in accordance to IESNA LM-79.

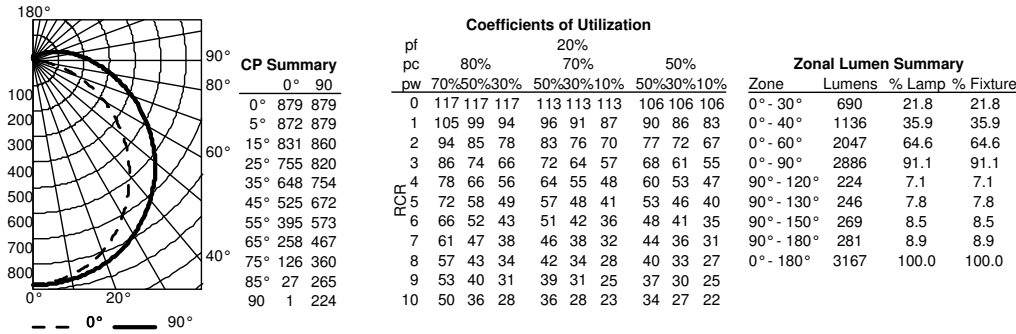

FMLCRSLS 48IN 40K 90CRI, 3,889 delivered lumens, test no. ISF 35479 B, tested in accordance to IESNA LM-79.

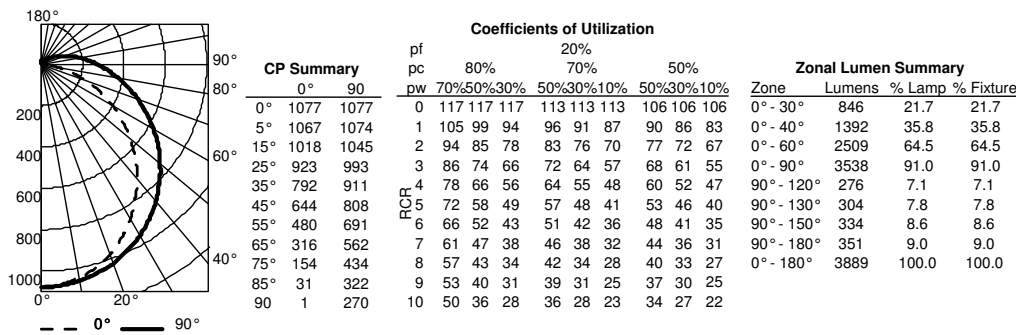

FMLCRSLS 48IN 50K 90CRI, 3,521 delivered lumens, test no. ISF 35479 C, tested in accordance to IESNA LM-79.

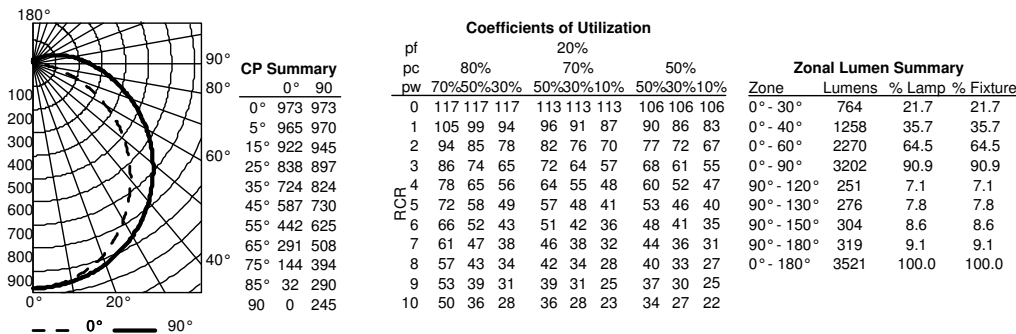

# LED Linear Flush Mount Crest

## LIGHTING FACTS

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 3100  
**Watts** 44.28  
**Lumens per Watt (Efficacy)** 70.01

**Color Accuracy**  
Color Rendering Index (CRI) 92

**Light Color**  
Correlated Color Temperature (CCT) 3000 (Bright White)

Warm White | Bright White | Daylight  
2700K | 3000K | 4500K | 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-YQ82M4 (8/23/2017)  
Model Number: FMLCRSLS 48IN 30K 90CRI  
Type: Luminaire - Decorative

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 3800  
**Watts** 42  
**Lumens per Watt (Efficacy)** 90.48

**Color Accuracy**  
Color Rendering Index (CRI) 92

**Light Color**  
Correlated Color Temperature (CCT) 4000 (Bright White)

Warm White | Bright White | Daylight  
2700K | 3000K | 4500K | 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-PFQDUN (8/23/2017)  
Model Number: FMLCRSLS 48IN 40K 90CRI  
Type: Luminaire - Decorative

**LED lighting facts**  
A Program of the U.S. DOE

**Light Output (Lumens)** 3400  
**Watts** 44.23  
**Lumens per Watt (Efficacy)** 76.87

**Color Accuracy**  
Color Rendering Index (CRI) 92

**Light Color**  
Correlated Color Temperature (CCT) 5000 (Daylight)

Warm White | Bright White | Daylight  
2700K | 3000K | 4500K | 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-WKADAV (8/23/2017)  
Model Number: FMLCRSLS 48IN 50K 90CRI  
Type: Luminaire - Decorative

### COMPATIBLE DIMMERS

The FMLCRSLS is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

| Manufacturer   | Part number(s) |
|----------------|----------------|
| Leviton        | 6633-PA        |
| Lutron         | DV-603P        |
|                | S-600-P        |
| Pass & Seymour | HCL453PTCCCV6  |
| Synergy        | ISD 600 I 120  |