DASH NO.	M CODE	MADE FROM

GSD

KN-19-162

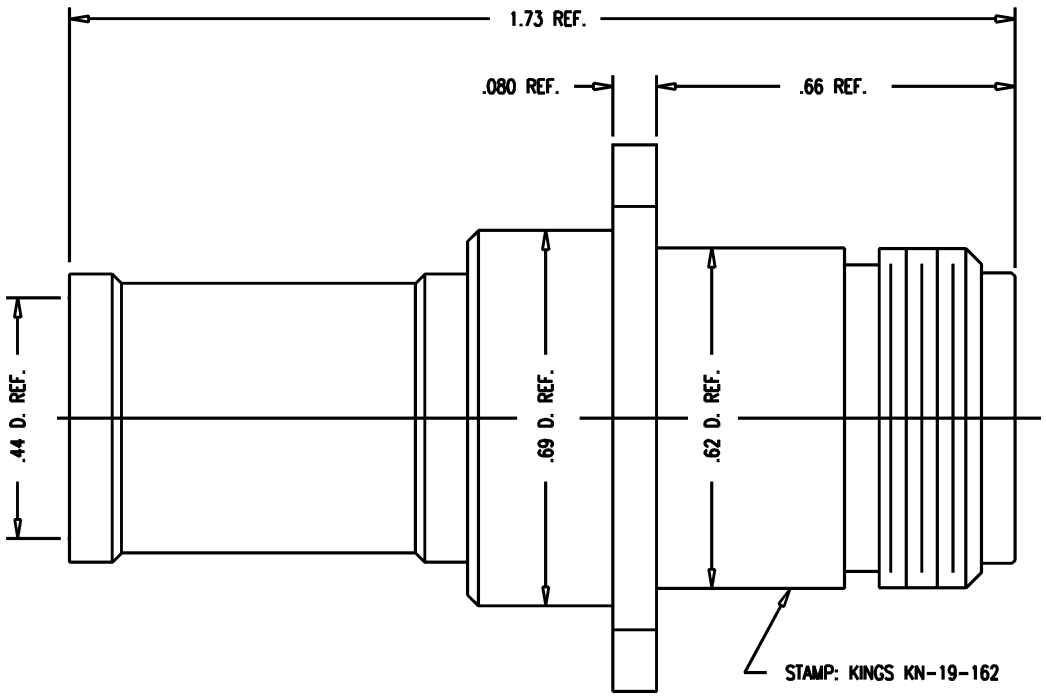

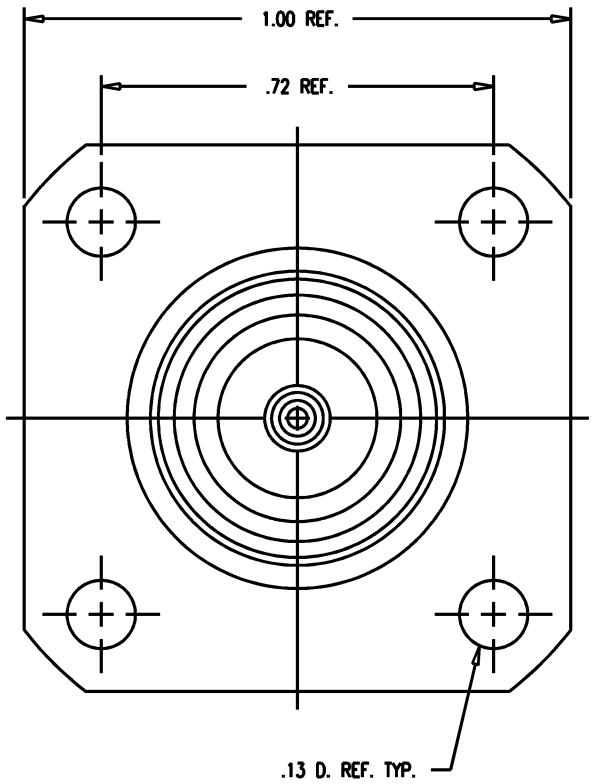

NOTES:
1. FOR USE WITH RG-9B, 214/U & BA-6903 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-5402.
3. FOR CABLE TRIMMING USE KTJ-150 & KTD-138.
4. FOR CRIMPING USE DIE KTH-1079.
5. K-GRIP SLEEVE (N-59-140-6-M06) & CENTER CONTACT (1-534-85MA9) TO BE SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS KN-19-162
   YRWK (DATE CODE)
7. MATERIALS:
   - INSULATORS: TEFLON, ASTM-D-1457
   - K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
   - CENTER CONTACT: BER. COP., ASTM-B-196
   - ALL OTHER PARTS: BRASS, QQ-B-626
8. FINISHES:
   - CENTER CONTACT: GOLD PLT. PER MIL-G-45204
   - ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
9. ELECTRICAL CHARACTERISTICS:
   - NOMINAL IMPEDANCE: 50 OHMS
   - VOLTAGE RATING: 1000 VRMS
   - FREQUENCY RANGE: DC TO 11 GHz

GSD

REVISIONS

ISSUE	CHANGES
3	CN 15700 C MJB 12/20/76
4	CN 29606 D AMD 02/18/88
5	CN 31044 C MZB 08/08/89
6	CN 38664 C BDH 09/25/02

SCALE	4:1
APPROX SURFACE AREA	
USED ON	
REF:	

N PANEL JACK

DRAWN	JCA	DATE	11/02/90
DESIGN	MJB	DATE	11/02/90
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KN-19-162