

Touchless Soap Dispenser - Square with Subtank

FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounted hardware and supply lines
- Chrome plated
- Single-hole mount
- TOTO Soap required
- Refillable tank system
- ADA compliant

COLORS/FINISHES

- #CP Polished Chrome

OPTIONAL ACCESSORY

- THP3140#CP
Escutcheon 1-1/8" ~ 1-1/2" (28mm~38mm)
- THP3374
Mount Bracket

MODELS

- **TES204AE#CP (2 Spouts)**
TLK08001G#CP (Spout x 2 pcs)
TLK01106UA (Controller & Reservoir)
TLK01401U (5.3 gal/20L Subtank)
- **TES205AE#CP (3 Spouts)**
TLK08001G#CP (Spout x 3 pcs)
TLK01107UA (Controller & Reservoir)
TLK01401U (5.3 gal/20L Subtank)



Auto Functions

PRODUCT SPECIFICATION

TOTO® Model No. _____
 Product shall be automatic infrared sensor activated.
 Product shall have automatic sensor adjustment upon installation. Soap dispenser, controller w/ reservoir, and subtank will be sold separately. Product shall have a controller pump with 0.8 gallon (3L) reservoir. Product shall have a 5.3 gallon (20L) subtank.

CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: UL
- Code Compliance: NEC, CEC
- ADA Compliant
- Compliance with CA Prop 65 warning requirements



COMPONENT BREAKDOWN

Soap Dispenser Specification Details

Step 1: Choose quantity of spouts desired

Step 2: Select kit or by individual component quantities

KIT OPTIONS		COMPONENTS					
Kit Model #	Spout Installation	SPOUT		CONTROLLER & RESERVOIR		SUBTANK	
		Model #	Quantity	Model #	Quantity	Model #	Quantity
TES204AE#CP	2	TLK08001G#CP	2	TLK01106UA	1 (For 2 Spouts)	TLK1401U	1
TES205AE#CP	3	TLK08001G#CP	3	TLK01107UA	1 (For 3 Spouts)	TLK1401U	1

TES20(4/5)AE Series

Touchless Soap Dispenser - Square with Subtank

SPECIFICATIONS

Power Supply	AC 120V
Wattage	(TLK01106UA) 6.5W (TLK01107UA) 9W
Sensor Detection Range	5-1/8" ~ 7-7/8" (130~200mm) Sensor is self-adjusting
Ambient Temperature	34-104°F (1-40°C)
Humidity	Max. 90% RH
Power Cord Length	55" (1.4 m)
Soap Output Volume	0.04 oz (factory setting)
Tank Capacity	Approximately 0.8 gal (3L) Tank Approximately 5.3 gal (20L) Subtank
Warranty	*Three Year Warranty

*Failure to use TOTO soap will void warranty

INSTALLATION NOTES


- Spout Mounting Hole $\phi 1"$ ~ $\phi 1\text{-}1/8"$ ($\phi 25$ ~ $\phi 28$ mm)
- Deck Thickness $1/4"$ ~ $1\text{-}1/8"$ (5 ~ 30 mm)

TOTO SOAP *(Sold Separately)*

SKU No.	Quantity	Packaging	Notes
TSFG1	4 gal.	Package of 4, 1 gal. each	Antimicrobial Soap (Fragrance Free)
TSFG55	55 gal.	Package of 1, 55 gal. each	Antimicrobial Soap (Fragrance Free)
TSFB1-GS	4 gal.	Package of 4, 1 gal. each	TOTO Foam Soap Green Seal™ (Lilac)



DIMENSIONS

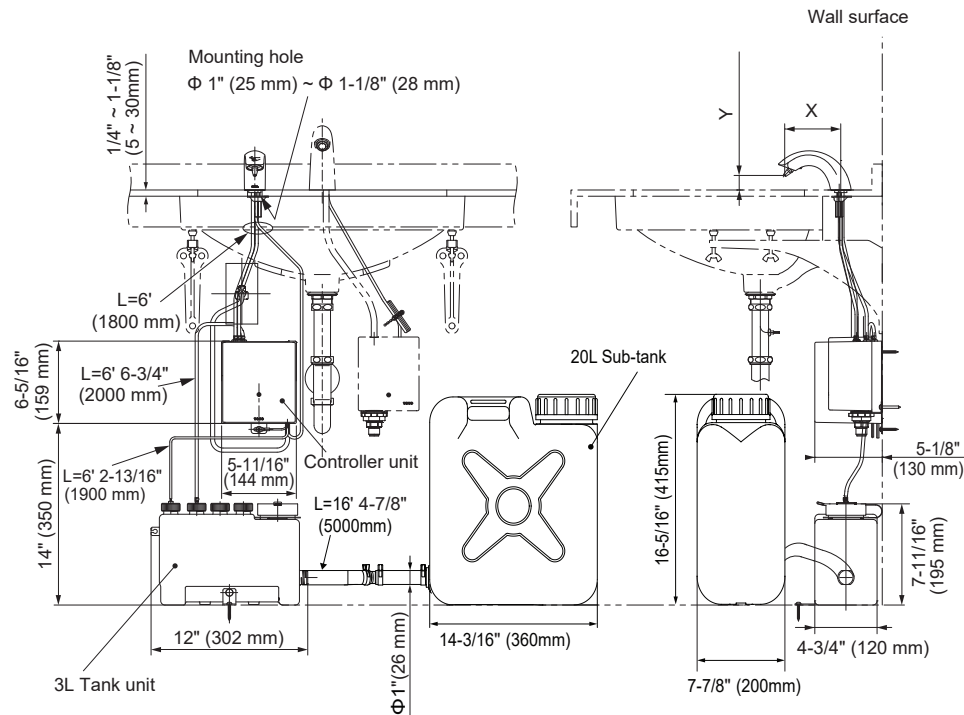

Spout	X	Y
TLK03001G	4-5/16"(108mm)	1-1/8"(28mm)
TLK07001G/TLK08001G	4-5/16"(108mm)	2-17/32"(63mm)
TLK08002G/TLK07003G/TLK08003G	4-5/16"(108mm)	3-7/32"(81mm) ~ 4-7/32"(106mm)

TOTO

These dimensions and specifications are subject to change without notice