

SN-IRC13/66APDN/Z


1080P Hybrid Motorized Analogue Bullet



Key features

- 1/2.9"Sony Progressive Scan CMOS
- 2.8-12mm Motorized Lens
- Full HD 1080P
- Video Transmission 300m
- IR Range 20-25m
- 2D/3D DNR,dWDR,ICR,BLC,ATW
- Support AHD/TVI/CVI/CVBS Output
- IP66

Dimension

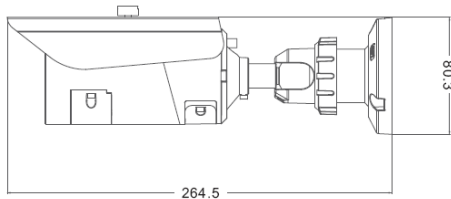

Accessories



SN-CBK627B



SN- CBK633

Specifications

| CAMERA | |
|-------------------------|---|
| Image Sensor | 1/2.9" Sony CMOS |
| Signal System | PAL/NTSC |
| Min. illumination | Color:0.01Lux@(F1.2,AGC ON) ; B/W:0Lux@(IR LED ON) |
| S/N Ratio | ≥50dB |
| Day & Night | ICR |
| Shutter Speed | PAL:1/50-1/50000, NTSC:1/60-1/60000 |
| Wide Dynamic Range | dWDR |
| Digital Noise Reduction | 2D/3D |
| Lens | 2.8-12mm Motorized Lens |
| FOV | 90°~35° |
| IR LED | 10pcs Piranha LED |
| IR Wavelength | 850nm |
| IR Range | 20-25m |
| OSD Joystick | Support |
| Up the Coax | Support |
| IMAGE | |
| Effective Resolution | 1920x1080 |
| Frame | PAL:25fps ,NTSC:30fps |
| Mirror | N/A |
| Defog | N/A |
| HLC | N/A |
| Privacy Masking | N/A |
| Motion Detection | N/A |
| VIDEO OUTPUT | |
| Max Distance | 75-5 300m |
| Video Output | AHD/TVI/CVI/CVBS |
| GENERAL | |
| Power Supply | DC12V±10% (AC24V Optional) |
| Power Consumption | 4.5W(Max) |
| Operating Temperature | -10°C ~ 55°C (14°F ~ 131°F) |
| Operating Humidity | 0% - 85% RH |
| Ingress Protection | IP66 |
| Approvals | CE / FCC |
| Material | Aluminium Alloy |
| Product Dimensions | φ80.3×264.5mm |
| Product Weight | 750g |