


Pockit® Plus 1.5W

12VDC



1.5W	115 Lumens	
<p>Pockit® Plus features clean and simple lines PLUS cutting-edge bulb technology that provide powerful, bright light without the energy consumption and heat. Performance and effortless installation for recess or surface mounting all at a competitive price – that's the power of PLUS.</p>		

Features:

Slim Profile – 1/4" (6 mm)

90° beam spread

Durable milled aluminum construction

Recess or surface mount

Typical Applications:

Displays

Mid-level flood light

Interior cabinets

Under cabinets



Thin profile: Just 1/4" (6 mm) depth when recessing
3/8" (9.5 mm) when surface mounting




Available in 4 finishes, with clear lens




Surface mount ring included



Available Finishes:

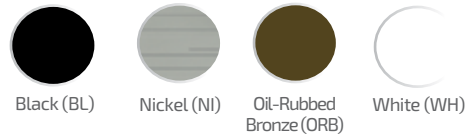

Dimensions:

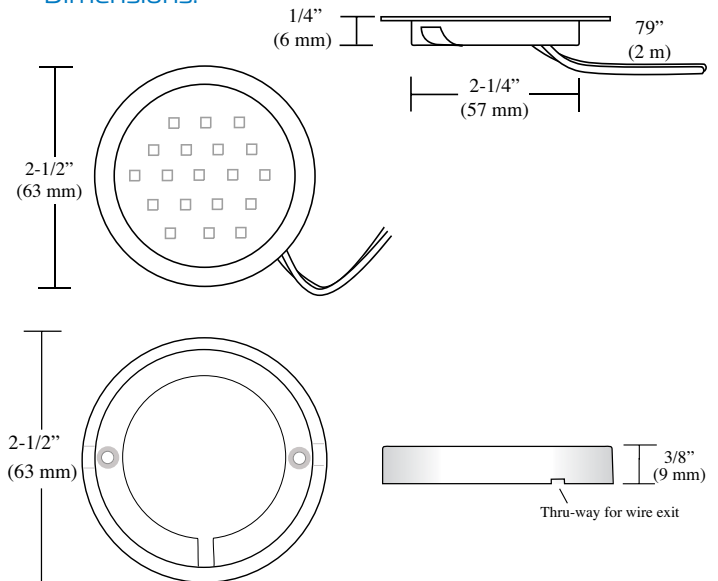


Typical Setup:




- Required
- Optional


Accessories:

●


Power Supplies
see power supply section



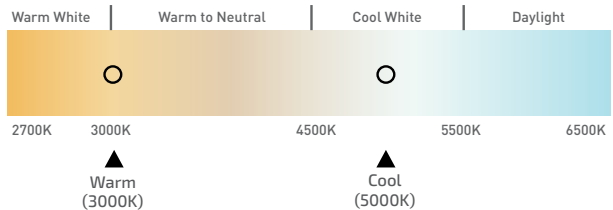
●


Controllers
see controller section

●


Starter Cord / Link Cords
see pg. 165 under starter extension cords

Specifications:

Wattage	Lumens	Efficacy (lm/W)	Input Voltage	Diode Life	Max Per 60W Power Supply	Mounting	Warranty	Beam Angle												
1.5W	115	77	12VDC	25,000 Hours	40 Fixtures	Recess/ Surface	3 Year													
Photometric Data					Color Temperature															
 <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Height</th> <th>Light Output</th> <th>Beam Area</th> </tr> </thead> <tbody> <tr> <td>1ft (.3 m)</td> <td>44.50Fc (479lx)</td> <td>2.5ft L x 2.5ft W (.8 m L x .8 m W)</td> </tr> <tr> <td>3ft (.9 m)</td> <td>4.95Fc (53.3lx)</td> <td>7.6ft L x 7.6ft W (2.3 m L x 2.3 m W)</td> </tr> <tr> <td>6ft (1.8 m)</td> <td>1.24Fc (13.3lx)</td> <td>15.2ft L x 15.2ft W (4.6 m L x 4.6 m W)</td> </tr> </tbody> </table> <p style="text-align: center; font-size: small;">L-POC-1LED5FR-C Tested</p>					Height	Light Output	Beam Area	1ft (.3 m)	44.50Fc (479lx)	2.5ft L x 2.5ft W (.8 m L x .8 m W)	3ft (.9 m)	4.95Fc (53.3lx)	7.6ft L x 7.6ft W (2.3 m L x 2.3 m W)	6ft (1.8 m)	1.24Fc (13.3lx)	15.2ft L x 15.2ft W (4.6 m L x 4.6 m W)	 <p style="text-align: center; font-size: small;"> ▲ Warm (3000K) ▲ Cool (5000K) </p>			
Height	Light Output	Beam Area																		
1ft (.3 m)	44.50Fc (479lx)	2.5ft L x 2.5ft W (.8 m L x .8 m W)																		
3ft (.9 m)	4.95Fc (53.3lx)	7.6ft L x 7.6ft W (2.3 m L x 2.3 m W)																		
6ft (1.8 m)	1.24Fc (13.3lx)	15.2ft L x 15.2ft W (4.6 m L x 4.6 m W)																		

See page 42 for part numbers and descriptions