



# Attac<sup>®</sup> Ultra

## Heavy Duty Floor Stripper


Attac<sup>®</sup> Ultra Heavy Duty Floor Stripper is a powerful, fast-acting stripper designed for the removal of tough-to-strip finishes and sealers with fewer passes.

### Features & Benefits

- Formulated for effective stripping the first time, reducing the need for additional restrips
- Fast penetration of built up finishes and sealer layers, and specially formulated to penetrate and emulsify the toughest UHS burnished finishes
- Cost effective solution with variable dilution rates utilizing cool water
- Pleasant cherry almond fragrance reduces complaints regarding floor stripping odors
- A safer choice as concentrate not regulated as hazardous waste for disposal under Environment Canada regulations

### Applications

- Designed for floor finish removal on VCT, terrazzo and concrete flooring
- Not intended for use on wood, linoleum, rubber, marble, painted surfaces, or on surface colored and acid dyed concrete floors as this product may harm these surfaces

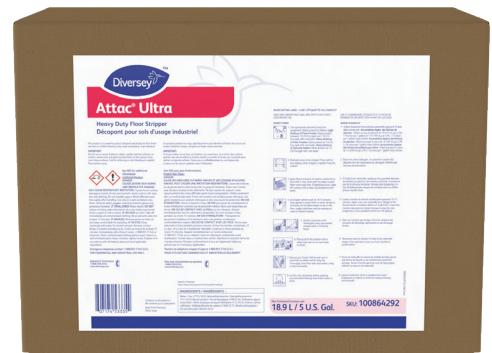



# Attac<sup>®</sup> Ultra

## Heavy Duty Floor Stripper

### Use Instructions

- Use appropriate personal protective equipment. Dilute product as follows:

**Light Build-up of Floor Finishes:** Dilute product between 1:8 (16 fl. oz. / gal.) and 1:10 (13 fl. oz. / gal.) with cool water

**Heavy Build-up of Floor Finishes:** Dilute product at 1:6 (24 fl. oz. / gal.) with cool water

**Heavy Build-up of Concrete Sealers:** Dilute product at 1:4 (32 fl. oz. / gal.) with cool water

- Blockade areas to be stripped. Floors will be very slippery when stripper is applied. Exercise caution.
- Apply liberal amounts of solution uniformly to floor with a mop. Start with the edges to give them more soak time. If splashing occurs, wipe off surfaces with a clean rag dampened with water.
- Let stripper solution soak for 5–10 minutes. Mop agitate to loosen finish or sealer. Re-wet as necessary, do not allow stripper to dry on the floor. Longer soak times may be necessary in cases of extreme buildup.
- Hand or machine scrub thoroughly using black pads or stripping brush
- Pick-up all of the solution with a clean mop, wet vac or automatic scrubber
- Mop up any “tracks” left by wet vacs or automatic scrubbers before they dry. Thoroughly rinse floor with clean water, using a mop and bucket.
- Let floor dry completely before applying recommended Diversey brand floor sealer or finish

Attac<sup>®</sup> Ultra Heavy Duty Floor Stripper meets the newest and most stringent VOC standards in North America, including those adopted by the California Air Resources Board (CARB).

| Technical data | Attac <sup>®</sup> Ultra                        |
|----------------|---|
| Color/Form     | Colorless, liquid                               |
| pH             | 12.3 (Concentrate)<br>11.7 (Use Dilution 1:512) |
| Scent          | Cherry Almond                                   |
| Shelf Life     | 2 Years   |

| Product                  | Pack size                                      | Dilution | Product code  |
|--------------------------|--|----------|---|
| Attac <sup>®</sup> Ultra | 1 x 5 gal. / 18.9 L Envirobox <sup>TM/MC</sup> | 1:4–1:10 | 100864292  |

### Safe handling

Please make sure your employees read and understand the product label and Safety Data Sheet before using this product. The label contains directions for use; and both the label and SDS contain hazard warnings, precautionary statements and first aid procedures. SDS are available online at [www.diversey.com](http://www.diversey.com) or by calling 888.352.2249. Improper use or dilution may result in damage to surfaces and may result in health and physical hazards that match those of the concentrate. Please refer to the Diversey HazMat Library, only available through Internet Explorer, <http://naextranet.diversey.com/dot/>, for up-to-date shipping information.