VPF6030CTSMN2

60 x 30 x 76



*Optional seat shown

VERITEK PRO

Lightweight and durable, Veritek Pro is produced with Swan Solid Surface, a proprietary SMC compound.

Veritek Pro is the better bathroom solution and is a snap to install!

Available in the Following Offerings:

		Height	Height		Model Number			
Depth	Width Standard			Standard	AIP	AFR	AIP & AFR	
30	60	76	_	VPF6030CTSMN2L/R	_	-	=	

- Standard: Base model shower, tub, or tub shower offering
- Aging In Place (AIP): Reinforced shower or tub shower walls that allows for future grab bar installation
- Above Floor Rough (AFR): Clearance for drain placement, eliminating the need for drain relocation
- Aging In Place (AIP) & Above Floor Rough (AFR): A combination kit for AFR & AIP

PROFESSIONAL

FEATURES

- Modern, matte finish
- Smooth, 4-piece kit
- Easy Wedge & Lock installation
- Caulkless installation
- Integral soap shelves
- Available in White only
- 15 Year residential limited warranty

OPTIONS

- Removable seat

CODE COMPLIANCE

- ADA
- FHA
- ICC/ANSI A117.1
- HUD UM73a
 - **Code compliant when fully equipped and installed according to guidelines.

COMPONENTS OF KIT

Standard

- VP6030CTMINL (Tub) or VP6030CTMINR Tub)
- VP6062CBWAF (Back Wall)
- VP2462CSWAF (Side Walls)

PACKAGED DIMENSIONS

- Tub: $62\frac{1}{2} \times 34 \times 7\frac{3}{4}$
- Back Wall: 65 x 61 1/2 x 8 1/2
- Side Wall Set: 64 x 26 ½ x 10 ½










VPF6030CTSMN2

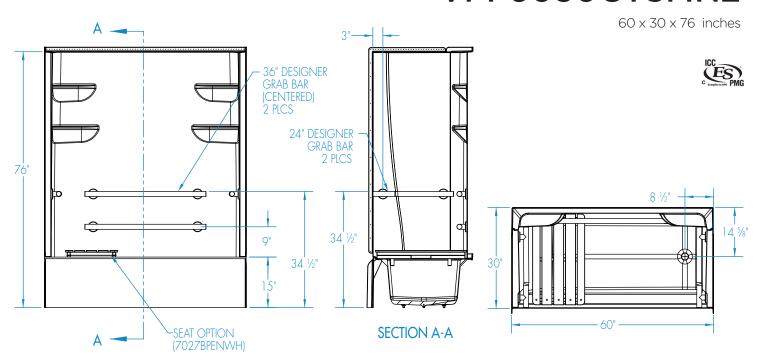

FEATURES Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Туре	Model #	Material	Height	Drain	Net Wt. lbs	Pkg. Wt. lbs
Standard Tub-Shower	VPF6030CTSMN2L/R	Swan Solid Surface	76	LH or RH	120	128

DIMENSIONS

inches		
60		
31 1/4 / 30		
77 3 /8 / 76		
56		
15		
14 5/8		
2 3/4		
2 / 1/2		

FRAMING DIMENSIONS inches

Туре	D Depth	W Width	H Height	А	В	С
Alcove	31 1/4	60	77 3/8	Box Out	2 3/4	14 ⁵ / ₈
	D			C A	B B	

SUMP DATA

Top of Drain to	Capacity to Overflow	WIDTH @	centerline	DEPTH @	centerline
Bottom of Overflow	gal	Тор	Bottom	Тор	Bottom
9 1/2	36 ½10	51 ⁵ /8	44 1/2	21 5/8	19 ⁵ /8

Rev. 03.07.22

