
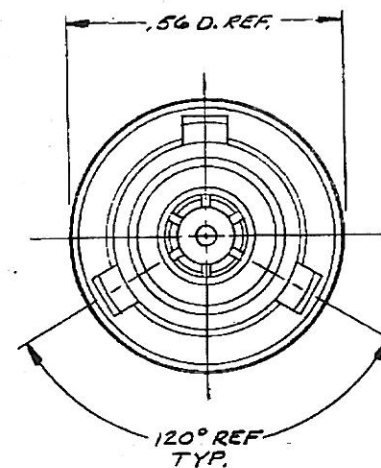


DASH NO.	DESCRIPTION	MADE FROM
----------	-------------	-----------

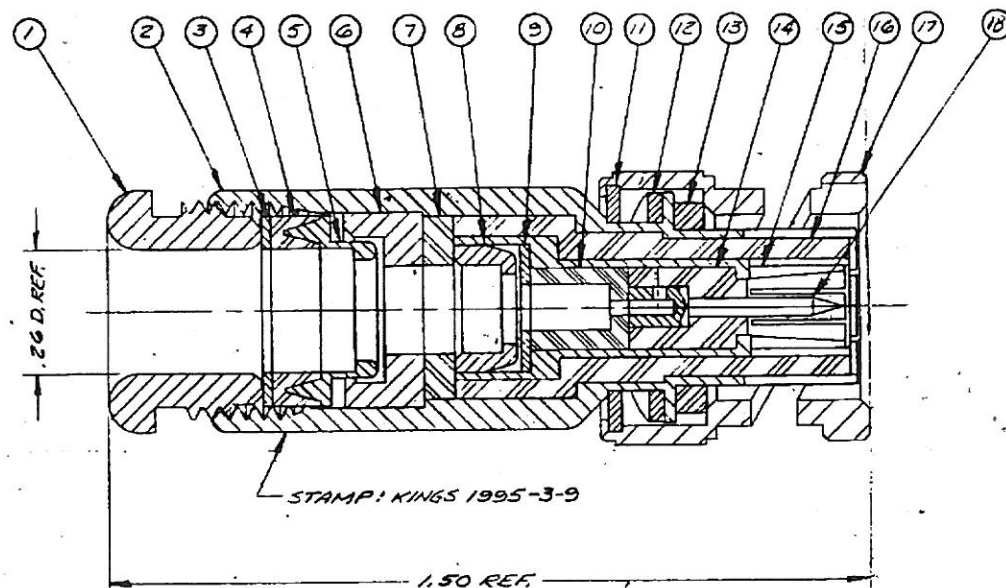

NOTES:

1. FOR USE WITH .M17/134-00001 OR TIMES TRF-58 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-1303.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS $\pm .010$
3 PLACE DECIMALS $\pm .004$
T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS. BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

ITEM	REQ'D	DESCRIPTION	PART NO.
------	-------	-------------	----------

(SHEET 1 OF 2)
1995-3-9 S-D

REVISIONS	
ISSUE	CHANGE
0	ER 21459 MJB 9 JAN 81
1	CN 21774 D KOR 27 MAR 81
2	CN 28495 D AJ 11 DEC 86
3	CN 31416 A JCA 6 FEB 90
4	CN 34639 C 17 MAY 93
S-D	
USED ON:	
REF:	
FINISH	
SPEC.	
MATERIAL	
SPEC.	
BNC TRIAXIAL PLUG (3 STUD)	
DRAWN MJB	DATE 20 NOV 79
APPR. GA	DATE 8 JAN 81
KINGS ELECTRONICS 40 HARBORDALE ROAD TUCKAHOE, N.Y. 10707	
1995-3-9 S-D	

(SHEET 1 OF 2)

ITEM	REQ'D	DESCRIPTION	PART NO	S-D		1995-3-9 (SHEET 2 OF 2)	
1	1	CLAMP NUT	631-4-M06			REVISIONS	
2	1	BODY				ISSUE	CHANGES
3	1	WASHER	260C-1-M06			0	ER 21459 MJB 9 JAN 81
4	1	GASKET	631-6-M99			1	CN 21774 D KOR 27 MAR 81
5	1	BRAID CLAMP	631-5-M06			2	CN 28495 D AJ 11 DEC 86
6	1	RETAINER	1-1119-3M06			3	CN 31416 A JCA 6 FEB 90
7	1	INSULATOR	1-1118-2M99			4	CN 34639 C KH 17 MAY 93
8	1	BRAID CLAMP	1-1117-2M06				
9	1	WASHER	C-19-112-12-M06				
10	1	INSULATOR	1-2795-1M99				
11	1	CAM LEVER					
12	1	SPRING WASHER					
13	1	GASKET					
14	1	INSULATOR	1-2796-1M99				
15	1	OUTER CONTACT	C-59-166-7-MA9				
16	1	INSULATOR	C-59-166-8-M99				
17	1	BAYONET SLEEVE					
18	1	BNC TRIAX CONTACT M	1-4896-3MA9				
						USED ON	
						REF	
						FINISH SPEC. KER 10004	
						PARTS LIST	
						DRAWN RGH	DATE 30 DEC 80
						APPD <i>ALS</i>	DATE 31 DEC 80
						 KINGS ELECTRONICS CO. INC. TUCKERMAN NEW YORK 10001	
						1995-3-9 (SHEET 2 OF 2) S-D	